



OmegaOne

Fittings.
Made.
Easy.



AMFM Braid Bands
Stainless Steel Tube
and Pipe Fittings



800.333.2636
Fittings. Made. Easy.

TX

Flared Fittings

OmegaOne	Airway	MS	SAE	Parker	SSP	Description	Page
BN	306	51860	080118	WLN	BN	Bulkhead Locknut	6
403	...	...	...	...	BJ	OD Socket-Weld x Male Flare	7
TX-N	318	51531	070110	BTX	JN	Flare Nut (JIC)	7
TX-S	319	51533	070115	TX	JS	Flare Sleeve (JIC)	8
TX-Z	304-C	51532	070112	FNTX	JZ	Cap	8
TX-U	2403	51501	070101	HTX	JU	Flare (JIC) Hex Union	9
TX-LHU	2403-LH	51519	070119	LHTX	JLHU	Large Hex Union	9
TX-C	2404	51500	070102	FTX	JC	Male Connector	10
TX-LC	2404-L	...	071802	FFTX	JLC	Male Connector Long	10
TX-FC	2405	51503	070103	GTX	JFC	Female Connector	11
TX-TER	2406	51534	...	TRBTX	JTER	Tube End (JIC) Reducer	11
TX-P	2408	51518	070109	PNTX	JP	Plug	12
TX-E	2500	51505	070201	ETX	J-E	Flare (JIC) Union Elbow	12
TX-ME	2501	51504	070202	CTX	JME	90° Male Elbow	13
TX-LME	2501-L	...	071502	CCTX	JLME	90° Male Elbow Long	13
TX-LLME	2501-LL	...	...	CCCTX	...	90° Male Elbow Extra Long	NR
TX-FE	2502	51506	070203	DTX	JFE	90° Female Elbow	14
TX-ME-45°	2503	51508	070302	VTX	JME-45°	45° Male Elbow	15
TX-E-45°	2504	...	071502	...	...	Flare Union Elbow 45°	15
TX-TTM	2601	51512	070425	STX	JTTM	Male Branch Tee	16
TX-TTF	2602	51513	070427	OTX	JTTF	Female Branch Tee	16
TX-T	2603	51510	070401	JTX	JT	Union Tee	17
TX-TMT	2605	51511	070424	RTX	JTMT	Male Run Tee	17
TX-TFT	2606	51514	070425	MTX	JTFT	Female Run Tee	18
TX-BU	2700	51520	070601	WTX	JBU	Bulkhead Union	18
TX-BE	2701	51507	070701	WETX	JBE	Bulkhead Union Elbow	19
TX-BE-45°	2702	51509	070801	WNTX	JBE-45°	45° Bulkhead Union Elbow	NR
TX-BBT	2703	51523	070959	WJTX	JBBT	Bulkhead Branch Tee	20
TX-BRT	2704	51516	070958	WJJTX	JBRT	Bulkhead Run Tee	20
TX-BFC	2705	...	...	WGXT	JBFC	Female JIC Bulkhead Connector	21
TX-BMC	2706	...	...	WFTX	JBC	Male JIC Bulkhead Connector	21
TX-GC	6400-0	51525	070120	F5X	JGC	Straight Thread O-Ring Connector	22
TX-LGC	6400-L	51526	070120	FF5X	JLGC	Straight Thread O-Ring Ext. Connector	23
TX-SE	6500	51521	070221	C6X	JSE	90° Swivel Nut Elbow	23
TX-SE-45°	6502	51522	070321	V6X	JSE-45°	Swivel Nut 45° Elbow	24
TX-SBT	6600	51524	070433	S6X	JSBT	Swivel Nut Male Branch Tee	24
TX-SRT	6602	...	070432	R6X	JSRT	Swivel Nut Run Tee	25
TX-GE	6801	51527	070220	C5X	JGE	Straight Thread O-Ring 90° Elbow	25
TX-GE-45°	6802	51528	070320	V5X	JGE-45°	Straight Thread O-Ring 45° Elbow	26
TX-GBT	6803	51529	070429	S5X	JGBT	Straight Thread O-Ring Branch Tee	26
TX-GRT	6804	51530	070428	R5X	JGRT	Straight Thread O-Ring Run Tee	27
JS-ME	6501	...	...	X6EF	JSME	Elbow 90 JIC Swivel/Male	27
JS-JS	6565	...	...	HX6	JSU	Swivel Nut Union	28
JS-GC	6402	...	...	F650X	JSGC	Swivel Straight Thread Connector	28
JS-FC	6506	...	...	G6X	JSFC	Swivel Female Connector	29
JS-C	6505	...	...	JX6	JS-C	Swivel Connector	29

Table of Contents

F

Flareless Fittings

OmegaOne	Airway	MS	SAE	Parker	SSP	Description	Page
BN	306	51860	080118	WLN	BN	Bulkhead Locknut	30
F-Z	C304-C	51890	080112	FNU	MZ	Cap Assy.	31
F-N	C318	51823	080110	BU	MN	Nut	NR
F-S	C319	51825	080115A	TU	MS	Sleeve	NR
F-TXU	C2402	...	080119	XHBU	MJ-U	Union Adapter	32
F-U	C2403	51814	080101	HBU	MU	Small Hex Union	33
F-LHU	C2403-LH	51856	080119	LHBU	MLHU	Large Hex Union	33
F-C	C2404	51819	080102	FBU	MC	Male Connector	34
F-FC	C2405	51816	080103	GBU	MFC	Female Connector	34
F-TER	C2406	...	080123	TRBU	M-TER	Reducer	35
F-P	C2408	51891	080109	PNU	MP	Plug	35
F-E	C2500	51820	080201	EBU	ME	90° Union Elbow	36
F-ME	C2501	51815	080202	CBU	MME	90° Male Elbow	37
F-LME	C2501-L	...	...	CCBU	M-LME	90° Male Elbow Long	NR
F-LLME	C2501-LL	...	...	CCCBU	M-LLME	90° Male Elbow Extra Long	NR
F-FE	C2502	51813	080203	DBU	MFE	90° Female Elbow	38
F-ME-45°	C2503	51817	080202	VBU	MME-45	45° Male Elbow	38
F-TTM	C2601	51818	080425	SBU	MTTM	Male Branch Tee	39
F-TTF	C2602	51821	080427	OBU	MTTF	Female Branch Tee	39
F-T	C2603	51811	080401	JBU	MT	Union Tee	40
F-TMT	C2605	51824	080424	RBU	MTMT	Male Run Tee	40
F-TFT	C2606	51822	080426	MBU	MTFT	Female Run Tee	41
F-BU	C2700	51812	080601	WBU	MBU	Bulkhead Union	41
F-BE	C2701	51855	080424	WEBU	M-BE	90° Bulkhead Union Elbow	NR
F-TX2U	C2707	...	080424	XH2BU	MJ-BU	Bulkhead Union Adapter	42
F-GC	C6400	51843	080120	F5BU	MGC	Straight Thread O-Ring Connector	43
F-LGC	C6400-L	51893	...	FF5BU	M-LGC	Straight Thread O-Ring Ext. Connector	NR
F-SE	C6500	51852	080221	C6BU	MSE	90° Swivel Nut Elbow	44
F-SE-45°	C6502-45	...	080424	V6BU	M-SE-45	Swivel Nut 45° Elbow	NR
F-SRT	C6602	51854	080432	R6BU	MSRT	Swivel Nut Run Tee	45
F-GE	C6801	51839	080320	C5BU	MGE	Straight Thread O-Ring 90° Elbow	45
F-GE-45°	C6802-45	51842	080320	V5BU	M-GE-45	Straight Thread O-Ring 45° Elbow	46
F-GBT	C6803-NWO	51841	080429	S5BU	MGBT	Straight Thread O-Ring Branch Tee	46
F-GRT	C6804-NOW	51892	080428	R5BU	MGRT	Straight Thread O-Ring Run Tee	47

AMFM Braid Bands, AMFM Wrapped Bands, AMFM Bulk Coil & Weld Fittings on page 66.



800.333.2636
Fittings. Made. Easy.

P

Threaded Pipe Fittings

OmegaOne	Airway	SAE	Parker	SSP	Description	Page
207ACBH	...	...	...	AAC	Anchor Coupling	49
P-GCU	3474	...	F5HA0	GCU	Male NPT to Male Straight Thread	49
P-HC	5000	140138	GG	HC	Coupling - or - Union	50
P-HN	5404	140137	FF	HN	Pipe Nipple/Hex Nipple	50
P-LHN	...	...	...	...	Long Pipe Nipple	51
P-RA	5405	140139	FG	RA	Adapter/Reducing Adapter	52
P-PTR	5406	140140	PTR	PTR	Bushing/Pipe Thread Reducer	53
P-HP	5406-P	130109E	HP	HP	Hex Head Plug	52
P-CP	5406-HP	130109N	HHP	CP	Hollow Hex Pipe Plug	53
P-MM	5500	140237	CR	MM	90° Male Pipe Elbow	54
P-MF	5502	140239	CD	MF	90° Street Elbow	54
P-MF-45°	5503	140339	CD45°	MF45°	45° Street Elbow	55
P-FF	5504	140238	DD	FF	90° Female Elbow	55
P-FF-45°	5505	140338	DD45°	FF45°	45° Female Pipe Elbow	56
P-MMM	5600	140437	RRS	MMM	Male Pipe Tee	56
P-FMF	5602	140424	MRO	FMF	Male Run Tee	57
P-FFM	5604	140425	MMS	FFM	Male Branch Tee	57
P-FFF	5605	140438	MMO	FFF	Pipe Tee	58
P-FSU	...	...	G5HG5	...	Female to Female Hex Pipe Coupling	60
P-GCM	6401	090109B	F50F	GCM	Pipe to Straight Thread Male Adapter	58
P-GCF	6405	140425	F50G	GCF	Pipe to Straight Thread Female Adapter	59
P-GP	6408	090109A	P50N	GP	Straight Thread Plug	59
P-CGP	6408-H	090109B	HP50N	CGP	Hollow Hex Straight Thread Plug	60
P-GCFS	6410	...	F50G5	GCFP	Male to Female Straight Thread	61
P-AEOG	6805	140425	AOEG	GEFP	90° Straight Thread Female Elbow	NR
P-GEF	...	...	...	...	Female Elbow	NR
PS-C	1404	140130	...	...	Male Pipe Adapter	62
PS-FC	1405	140131	...	...	Female Pipe Adapter	62
PS-FE	1502	140231	...	...	Female Pipe Elbow	63
PS-ME	1501	140230	...	...	Male Pipe Elbow	63
PS-ME-45	1503	140330	...	...	Male Elbow Pipe	64
PL-JS	2111	...	...	...	Push-On Hose Barb	64
PL-MP	2113	...	...	...	Push-On Hose Barb	64
PL-TX	2116	...	...	...	Push-On Hoes Barb	65
M2HC	...	...	...	...	Hose Barb Connector	65

Table of Contents

BB

Braidbands

OmegaOne	Description	Page
BB	Solid Braid Bands	66
	Braid Band Specifications	68
	Sizing Braid Bands	69
WB	Wrapped Bands	70
CS	Cut Strip	70
BC	Bulk Coil	71
	Custom Imprinting	72
	Fixed Imprinting	73


W

Weld Fittings

OmegaOne	Description	Page
BHC	Buttweld Hose Connector	75
BHFC	Buttweld Hose Female Connector	75
BHJS	Buttweld Hose JIC Swivel	75
PF	Pipe Fitting	76
SE	Slotted End	78



TX Flared Fittings

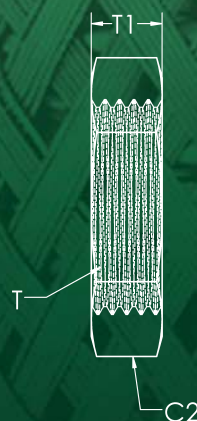

BN



Bulkhead Locknut • Bulkhead Fitting Locknut

306
MS51860
SAE 080118

Part #	Tube O.D.	T	C2 Hex	T1
BN-3	3/16	3/8-24	5/8	.22
BN-4	1/4	7/16-20	11/16	.28
BN-5	5/16	1/2-20	3/4	.28
BN-6	3/8	9/16-18	13/16	.27
BN-8	1/2	3/4-16	1	.31
BN-10	5/8	7/8-14	1 1/8	.36
BN-12	3/4	1 1/16-12	1 3/8	.41
BN-14	7/8	1 3/16-12	1 1/2	.41
BN-16	1	1 5/16-12	1 5/8	.41
BN-20	1 1/4	1 5/8-12	1 7/8	.41
BN-24	1 1/2	1 7/8-12	2 1/8	.41
BN-32	2	2 1/2-12	2 3/4	.41

Call toll free:

800.333.2636

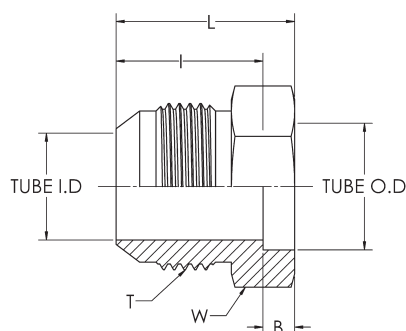

O.D. Socket • Weld x Male Flare

403

Tube Fitting Part #	Tube O.D.	T	B	ID-Tube	I	L	W
403-4	1/4	7/16-20	.16	1/4	.550	.74	1/2
403-6	3/8	9/16-18	.16	3/8	.556	.81	5/8
403-8	1/2	3/4-16	.16	1/2	.657	.94	1 3/16
403-12	3/4	1 1/16-12	.25	3/4	.864	1.24	1 1/8
403-16	1	1 5/16-12	.25	1	.911	1.29	1 3/8
403-20	1 1/4	1 5/8-12	.25	1 1/4	.958	1.40	1 11/16
403-24	1 1/2	1 7/8-12	.25	1 1/2	1.083	1.58	2
403-32	2	2 1/2-12	.25	2	1.333	1.96	2 5/8

Nut • Flare Tube End Nut

Tube Fitting Part #	Tube O.D.	T6 UN/UNF-2B	C Hex	D	L
TX-2-N	1/8	5/16-24	3/8	.179	.550
TX-3-N	3/16	3/8-24	7/16	.241	.610
TX-4-N	1/4	7/16-20	9/16	.304	.620
TX-5-N	5/16	1/2-20	5/8	.373	.680
TX-6-N	3/8	9/16-18	11/16	.439	.730
TX-8-N	1/2	3/4-16	7/8	.568	.850
TX-10-N	5/8	7/8-14	1	.696	.980
TX-12-N	3/4	1 1/16-12	1 1/4	.832	1.030
TX-14-N	7/8	1 3/16-12	1 3/8	.959	1.090
TX-16-N	1	1 5/16-12	1 1/2	1.087	1.130
TX-20-N	1 1/4	1 5/8-12	2	1.344	1.230
TX-24-N	1 1/2	1 7/8-12	2 1/4	1.614	1.420
TX-32-N	2	2 1/2-12	2 7/8	2.164	1.750

TX-N


318

MS51531
SAE 070110


800.333.2636

Omega1.com

TX-S



TX-Z

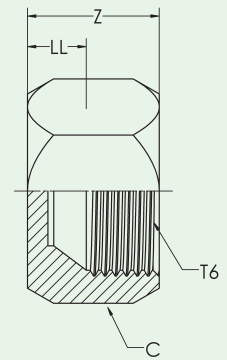

TX-S

Sleeve • Flare Tube End Sleeve

319
MS51533
SAE 070115

Tube Fitting Part #	Tube O.D.	L	X
TX-2-S	1/8	.34	.267
TX-3-S	3/16	.34	.329
TX-4-S	1/4	.41	.383
TX-5-S	5/16	.44	.445
TX-6-S	3/8	.50	.502
TX-8-S	1/2	.56	.682
TX-10-S	5/8	.66	.797
TX-12-S	3/4	.69	.972
TX-14-S	7/8	.75	1.097
TX-16-S	1	.78	1.222
TX-20-S	1 1/4	.91	1.534
TX-24-S	1 1/2	1.13	1.784
TX-32-S	2	1.19	2.409

TX-Z


Cap • Flare Tube End Cap

304-C
MS51532
SAE 070112


Tube Fitting Part #	Tube O.D.	T6 UN/UNF-2B	C Hex	LL	Z	Dynamic Pressure Rating
TX-2-Z	1/8	5/16-24	3/8	.375	.601	6000
TX-3-Z	3/16	3/8-24	7/16	.375	.662	6000
TX-4-Z	1/4	7/16-20	9/16	.344	.673	6000
TX-5-Z	5/16	1/2-20	5/8	.406	.766	6000
TX-6-Z	3/8	9/16-18	11/16	.469	.806	6000
TX-8-Z	1/2	3/4-16	7/8	.531	.942	6000
TX-10-Z	5/8	7/8-14	1	.531	1.067	6000
TX-12-Z	3/4	1 1/16-12	1 1/4	.656	1.243	6000
TX-14-Z	7/8	1 3/16-12	1 3/8	.625	1.258	4800
TX-16-Z	1	1 5/16-12	1 1/2	.625	1.290	4800
TX-20-Z	1 1/4	1 5/8-12	2	.750	1.392	3600
TX-24-Z	1 1/2	1 7/8-12	2 1/4	.938	1.701	2400
TX-32-Z	2	2 1/2-12	2 7/8	1.188	2.071	1800

*LL - END TO BASE OF MATING FLARE SEAT

TX-U

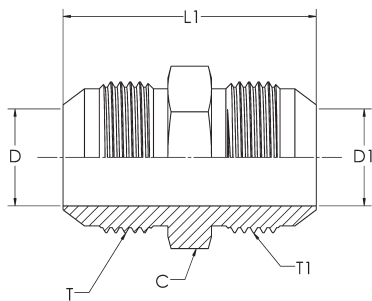

TX-LHU

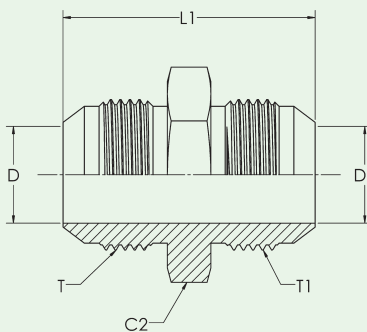

Flared Fittings

TX

TX-U

Union • Flare Tube End/Flare Tube End

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T1 Tube End UN/UNF-2B	C Hex	D Drill	D1 Drill	L1	Dynamic Pressure Rtg
TX-2-U	1/8	5/16-24	5/16-24	7/16	.062	.062	1.17	6000
TX-3-U	3/16	3/8-24	3/8-24	7/16	.125	.125	1.23	6000
TX-4-U	1/4	7/16-20	7/16-20	1/2	.172	.172	1.38	6000
TX-5-U	5/16	1/2-20	1/2-20	9/16	.234	.234	1.38	6000
TX-6-U	3/8	9/16-18	9/16-18	5/8	.297	.297	1.41	6000
TX-6-4-U	3/8	9/16-18	7/16-20	5/8	.297	.172	1.41	6000
TX-8-U	1/2	3/4-16	3/4-16	13/16	.391	.391	1.62	6000
TX-8-6-U	1/2	3/4-16	9/16-18	13/16	.391	.297	1.52	6000
TX-10-U	5/8	7/8-14	7/8-14	15/16	.484	.484	1.88	6000
TX-10-8-U	5/8	7/8-14	3/4-16	15/16	.484	.391	1.78	6000
TX-12-U	3/4	1 1/16-12	1 1/16-12	1 1/8	.609	.609	2.16	6000
TX-12-8-U	3/4	3/4-16	3/4-16	1 1/8	.609	.391	1.95	6000
TX-12-10-U	3/4	7/8-14	7/8-14	1 1/8	.609	.484	2.05	6000
TX-14-U	7/8	1 3/16-12	1 3/16-12	1 1/4	.718	.718	2.22	4800
TX-16-U	1	1 5/16-12	1 5/16-12	1 3/8	.844	.844	2.25	4800
TX-16-12-U	1	1 1/16-12	1 1/16-12	1 3/8	.609	.609	2.20	4800
TX-20-U	1 1/4	1 5/8-12	1 5/8-12	1 11/16	1.078	1.078	2.44	3600
TX-24-U	1 1/2	1 7/8-12	1 7/8-12	2	1.312	1.312	2.75	2400
TX-32-U	2	2 1/2-12	2 1/2-12	2 5/8	1.781	1.781	3.41	1800

2403
MS 51501
SAE 070101

TX-LHU

Large Hex Union • Flare Tube End/Flare Tube End

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T1 Tube End UN/UNF-2A	C2 Hex	D Drill	D1 Drill	L1	Dynamic Pressure Rtg.
TX-4-LHU	1/4	7/16-20	7/16-20	11/16	0.172	0.172	1.37	6000
TX-4-3-LHU	1/4 to 3/16	7/16-20	3/8-24	11/16	0.172	0.125	1.30	6000
TX-5-LHU	5/16	1/2-20	1/2-20	3/4	0.234	0.234	1.37	6000
TX-6-LHU	3/8	9/16-18	9/16-18	13/16	0.297	0.297	1.41	6000
TX-6-4-LHU	3/8 to 1/4	9/16-18	7/16-20	13/16	0.297	0.172	1.41	6000
TX-8-LHU	1/2	3/4-16	3/4-16	1	0.391	0.391	1.62	6000
TX-8-4-LHU	1/2 to 1/4	3/4-16	7/16-20	1	0.391	0.172	1.52	6000
TX-8-6-LHU	3/8 to 3/8	3/4-16	9/16-18	1	0.391	0.297	1.52	6000
TX-10-LHU	3/4	7/8-14	7/8-14	1 1/8	0.484	0.484	1.88	6000
TX-12-LHU	3/4	1 1/16-12	1 1/16-12	1 3/8	0.609	0.609	2.16	6000
TX-12-8-LHU	3/4 to 1/2	1 1/16-12	3/4-16	1 3/8	0.609	0.391	2.25	6000
TX-16-LHU	1	1 5/16-12	1 5/16-12	1 5/8	0.844	0.844	2.25	4800

2403-LH
MS51519
SAE 070119



C2* - LARGE HEX ALLOWS FOR USE IN MS33649 PORT

800.333.2636

Omega1.com

TX-C

TX-LC

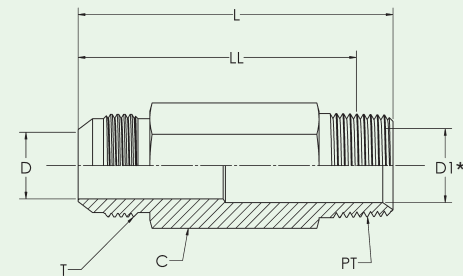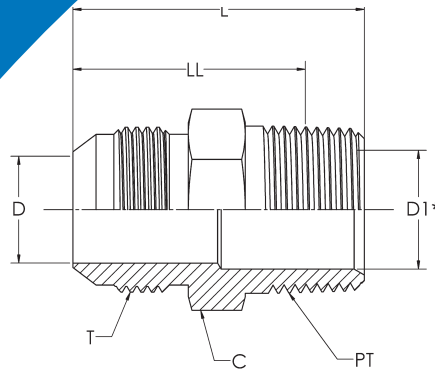

TX-C

Male Connector • Flare Tube End/Male Pipe End

2404
MS51500
SAE 070102

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT PORT THD NPTF	C Hex	D Drill	D1 Drill	L	LL After Assy.	Dynamic Pressure Rtg
TX-2-C	1/8	5/16-24	1/8-27	7/16	.062	.188	1.11	.88	6000
TX-3-C	3/16	3/8-24	1/8-27	7/16	.125	.188	1.14	.91	6000
TX-4-C	1/4	7/16-20	1/8-27	1/2	.172	.188	1.22	.99	6000
TX-4-4-C	1/4	7/16-20	1/4-18	9/16	.172	.281	1.42	1.08	6000
TX-4-6-C	1/4	7/16-20	3/8-18	3/4	.172	.406	1.44	1.09	6000
TX-4-8-C	1/4	7/16-20	1/2-14	7/8	.172	.531	1.69	1.23	6000
TX-5-C	5/16	1/2-20	1/8-27	9/16	.234	.188	1.22	.99	6000
TX-5-4-C	5/16	1/2-20	1/4-18	9/16	.234	.281	1.42	1.08	6000
TX-6-C	3/8	9/16-18	1/4-18	5/8	.297	.281	1.43	1.09	6000
TX-6-2-C	3/8	9/16-18	1/8-27	5/8	.297	.188	1.24	1.01	6000
TX-6-6-C	3/8	9/16-18	3/8-18	3/4	.297	.406	1.44	1.09	6000
TX-6-8-C	3/8	9/16-18	1/2-14	7/8	.297	.531	1.69	1.23	6000
TX-8-C	1/2	3/4-16	3/8-18	13/16	.391	.406	1.53	1.18	6000
TX-8-4-C	1/2	3/4-16	1/4-18	13/16	.391	.281	1.53	1.19	6000
TX-8-8-C	1/2	3/4-16	1/2-14	7/8	.391	.531	1.78	1.32	6000
TX-8-12-C	1/2	3/4-16	3/4-14	1 1/8	.391	.719	1.85	1.37	4800
TX-10-C	5/8	7/8-14	1/2-14	15/16	.484	.531	1.89	1.43	6000
TX-10-6-C	5/8	7/8-14	3/8-18	15/16	.484	.406	1.70	1.35	6000
TX-10-12-C	5/8	7/8-14	3/4-14	1 1/8	.484	.719	1.95	1.47	4800
TX-12-C	3/4	1 1/16-12	3/4-14	1 1/8	.609	.719	2.06	1.58	4800
TX-12-8-C	3/4	1 1/16-12	1/2-14	1 1/8	.609	.531	2.06	1.60	5400
TX-12-16-C	3/4	1 1/16-12	1-11 1/2	1 3/8	.609	.938	2.25	1.68	3600
TX-14-C	7/8	1 3/16-12	3/4-14	1 1/4	.718	.719	2.09	1.61	4200
TX-16-C	1	1 5/16-12	1-11 1/2	1 3/8	.844	.938	2.30	1.73	3600
TX-16-12-C	1	1 5/16-12	3/4-14	1 3/8	.844	.719	2.11	1.63	4200
TX-20-C	1 1/4	1 5/8-12	1 1/4-11 1/2	1 11/16	1.078	1.250	2.45	1.86	3000
TX-20-16-C	1 1/4	1 5/8-12	1-11 1/2	1 11/16	1.078	.938	2.42	1.85	3600
TX-24-C	1 1/2	1 7/8-12	1 1/2-11 1/2	2	1.312	1.500	2.67	2.08	2400
TX-24-20-C	1 1/2	1 7/8-12	1 1/4-11 1/2	2	1.312	1.250	2.66	2.07	2400
TX-32-C	2	2 1/2-12	2-11 1/2	2 5/8	1.781	1.938	3.11	2.50	1800

*D MAY BE SUBSTITUTED FOR D1 WHERE D IS SMALLER THAN D1

TX-LC


Long Male Connector • Flare Tube End/Flare Tube End

2404-L
SAE 071802


Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT NPTF	C Hex	D Drill	D1 Drill	L	LL	Dynamic Pressure Rtg
TX-4-LC	1/4	7/16-20	1/8-27	1/2	.172	.172	1.810	1.58	6000
TX-4-4-LC	1/4	7/16-20	1/4-18	9/19	.172	.172	2.250	1.91	6000
TX-6-LC	3/8	9/16-18	1/4-18	5/8	.297	.281	2.250	1.91	6000
TX-6-6-LC	3/8	9/16-18	3/8-18	3/4	.297	.297	2.500	2.15	6000
TX-8-LC	1/2	3/4-16	3/8-18	13/16	.391	.406	2.750	2.40	6000
TX-8-8-LC	1/2	3/4-16	1/2-14	15/16	.531	.391	2.800	2.34	6000
TX-10-LC	5/8	7/8-14	1/2-14	15/16	.484	.531	3.120	2.66	6000
TX-12-LC	3/4	1 1/16-12	3/4-14	1 1/8	.609	.609	3.500	3.02	4800

*D MAY BE SUBSTITUTED FOR D1 WHERE D IS SMALLER THAN D1

TX-FC

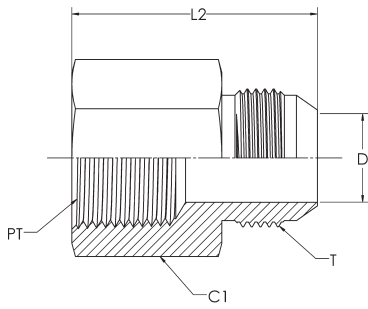

TX-TER



Flared Fittings

TX

TX-FC

Female Connector • Flare Tube End/Female Pipe End

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port Thread NPTF	C1 Hex	D Drill	L2	Dynamic Pressure Rtg
TX-2-FC	1/8	5/16-24	1/8-27	9/16	.062	1.13	6000
TX-3-FC	3/16	3/8-24	1/8-27	9/16	.125	1.13	6000
TX-4-FC	1/4	7/16-20	1/8-27	9/16	.172	1.19	6000
TX-4-4-FC	1/4	7/16-20	1/4-18	3/4	.172	1.39	6000
TX-5-FC	5/16	1/2-20	1/8-27	9/16	.234	1.17	6000
TX-5-4-FC	5/16	1/2-20	1/4-18	3/4	.234	1.39	6000
TX-6-FC	3/8	9/16-18	1/4-18	3/4	.297	1.41	6000
TX-6-6-FC	3/8	9/16-18	3/8-18	7/8	.297	1.47	6000
TX-8-FC	1/2	3/4-16	3/8-18	7/8	.391	1.56	6000
TX-8-8-FC	1/2	3/4-16	1/2-14	1 1/8	.391	1.79	6000
TX-10-FC	5/8	7/8-14	1/2-14	1 1/8	.484	1.89	6000
TX-12-FC	3/4	1 1/16-12	3/4-14	1 3/8	.609	2.06	4800
TX-12-8-FC	3/4	1 1/16-12	1/2-14	1 1/8	.609	1.91	5400
TX-14-FC	7/8	1 3/16-12	3/4-14	1 3/8	.718	2.06	4200
TX-16-FC	1	1 5/16-12	1-11 1/2	1 5/8	.844	2.34	3600
TX-20-FC	1 1/4	1 5/8-12	1 1/4-11 1/2	2	1.078	2.48	3000
TX-24-FC	1 1/2	1 7/8-12	1 1/2-11 1/2	2 3/8	1.312	2.63	2400
TX-32-FC	2	2 1/2-12	2-11 1/2	2 7/8	1.781	2.97	1800

2405
MS51503
SAE 070103

TX-TER

Tube End Reducer • Assembles to Flare End to Reduce Size

Tube Fitting Part #	Tube O.D. Reduction	T Tube End UN/UNF-2A	D Drill	L1	Dynamic Pressure Rtg
TX-4-2-TER	1/4 to 1/8	5/16-24	.062	.69	6000
TX-6-4-TER	3/8 to 1/4	7/16-20	.172	.90	6000
TX-8-4-TER	1/2 to 1/4	7/16-20	.172	.91	6000
TX-8-6-TER	1/2 to 3/8	9/16-18	.297	.91	6000
TX-10-4-TER	5/8 to 1/4	7/16-20	.172	.95	6000
TX-10-6-TER	5/8 to 3/8	9/16-18	.297	.95	6000
TX-10-8-TER	5/8 to 1/2	3/4-16	.391	.88	6000
TX-12-4-TER	3/4 to 1/4	7/16-20	.172	.98	6000
TX-12-6-TER	3/4 to 3/8	9/16-18	.297	.98	6000
TX-12-8-TER	3/4 to 1/2	3/4-16	.391	1.08	6000
TX-12-10-TER	3/4 to 5/8	7/8-14	.484	1.04	6000
TX-14-6-TER	7/8 to 3/8	9/16-18	.297	1.01	4800
TX-14-10-TER	7/8 to 5/8	7/8-14	.484	1.22	4800
TX-14-12-TER	7/8 to 3/4	1 1/16-12	.609	1.20	4800
TX-16-8-TER	1 to 1/2	3/4-16	.391	1.15	4800
TX-16-12-TER	1 to 3/4	1 1/16-12	.609	1.36	4800
TX-16-14-TER	1 to 7/8	1 3/16-12	.718	1.23	4800
TX-20-12-TER	1 1/4 to 3/4	1 1/16-12	0.609	1.37	3600
TX-20-16-TER	1 1/4 to 1	1 5/16-12	0.844	1.44	3600
TX-24-20-TER	1 1/2 to 1 1/4	1 5/8-12	1.078	1.47	2400


2406
MS51534
SAE 070123

** DOES NOT CONFORM TO MS/SAE, ***L1-END TO BASE OF FLARE SEAT


800.333.2636

Omega1.com

TX-P

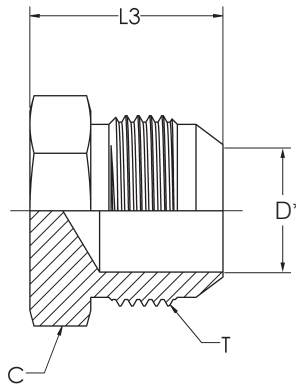

TX-E

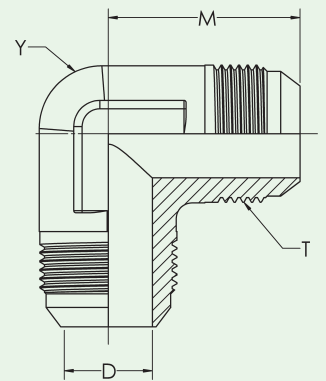

TX-P

Plug • Flare Plug

2408
MS51518
SAE 070109

Tube Fitting Part #	Tube O.D.	T UN/UNF-2B	D*	C Hex	L3	Dynamic Pressure Rtg
TX-2-P	1/8	5/16-24	.062	7/16	.70	7700
TX-3-P	3/16	3/8-24	.125	7/16	.73	7700
TX-4-P	1/4	7/16-20	.172	1/2	.80	7700
TX-5-P	5/16	1/2-20	.234	9/16	.80	7700
TX-6-P	3/8	9/16-18	.297	5/8	.84	7700
TX-8-P	1/2	3/4-16	.391	13/16	.94	7700
TX-10-P	5/8	7/8-14	.484	15/16	1.10	6000
TX-12-P	3/4	1 1/16-12	.609	1 1/8	1.28	6000
TX-14-P	7/8	1 3/16-12	.718	1 1/4	1.31	4800
TX-16-P	1	1 5/16-12	.844	1 3/8	1.33	4800
TX-20-P	1 1/4	1 5/8-12	1.078	1 11/16	1.45	3600
TX-24-P	1 1/2	1 7/8-12	1.312	2	1.66	2400
TX-32-P	2	2 1/2-12	1.781	2 5/8	2.05	1800

*DRILL MAY BE PRESENT DUE TO MANUFACTURING OPTION PER SAE J514


TX-E

Union Elbow • Flare Tube End/Flare Tube End


2500
MS51505
SAE 070201

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	D Drill	M	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-2-E	1/8	5/16-24	.062	.770	7/16	7700
TX-3-E	3/16	3/8-24	.125	.830	7/16	7700
TX-4-E	1/4	7/16-20	.172	.890	7/16	7700
TX-5-E	5/16	1/2-20	.234	.950	9/16	6000
TX-6-E	3/8	9/16-18	.297	1.060	9/16	6000
TX-8-E	1/2	3/4-16	.391	1.250	3/4	6000
TX-10-E	5/8	7/8-14	.484	1.450	7/8	5000
TX-12-E	3/4	1 1/16-12	.609	1.660	1 1/16	5000
TX-14-E	7/8	1 3/16-12	.718	1.800	1 3/16	3500
TX-16-E	1	1 5/16-12	.844	1.810	1 5/16	3500
TX-20-E	1 1/4	1 5/8-12	1.078	2.060	1 5/8	3000
TX-24-E	1 1/2	1 7/8-12	1.312	2.330	1 7/8	2000
TX-32-E	2	2 1/2-12	1.781	3.060	2 1/2	1500

TX-ME

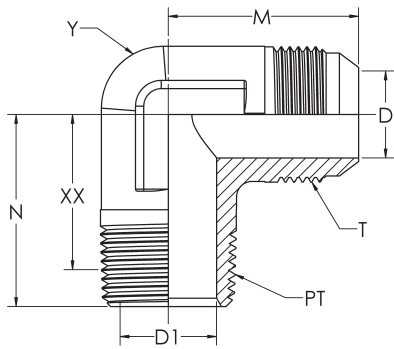

TX-LME

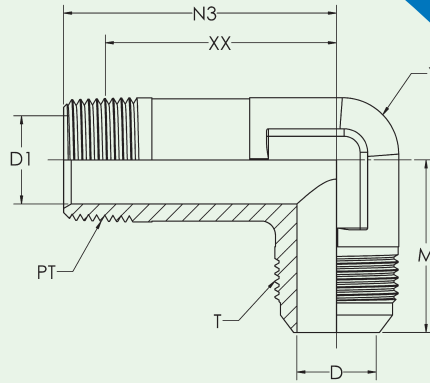

Flared Fittings

TX

Male Elbow • Flare Tube End/Male Pipe End

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	D Drill	D1 Drill	M	N	XX After Assembly	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-2-ME	1/8	5/16-24	1/8-27	.062	.188	.770	.720	.490	7/16	5000
TX-3-ME	3/16	3/8-24	1/8-27	.125	.188	.830	.720	.490	7/16	5000
TX-4-ME	1/4	7/16-20	1/8-27	.172	.188	.890	.780	.550	7/16	5000
TX-4-4-ME	1/4	7/16-20	1/4-18	.172	.281	1.050	1.090	.750	9/16	5000
TX-4-6-ME	1/4	7/16-20	3/8-18	.172	.406	1.130	1.220	.870	3/4	5000
TX-4-8-ME	1/4	7/16-20	1/2-14	.172	.531	1.230	1.440	.970	7/8	5000
TX-5-ME	5/16	1/2-20	1/8-27	.234	.188	.950	.780	.550	9/16	5000
TX-5-4-ME	5/16	1/2-20	1/4-18	.234	.281	1.050	1.090	.750	9/16	5000
TX-6-ME	3/8	9/16-18	1/4-18	.297	.281	1.060	1.090	.750	9/16	5000
TX-6-2-ME	3/8	9/16-18	1/8-27	.297	.188	1.060	.900	.670	9/16	5000
TX-6-6-ME	3/8	9/16-18	3/8-18	.297	.406	1.140	1.220	.870	3/4	5000
TX-6-8-ME	3/8	9/16-18	1/2-14	.297	.531	1.220	1.470	1.010	7/8	5000
TX-8-ME	1/2	3/4-16	3/8-18	.391	.406	1.250	1.220	.870	3/4	5000
TX-8-4-ME	1/2	3/4-16	1/4-18	.391	.281	1.250	1.220	.880	3/4	5000
TX-8-8-ME	1/2	3/4-16	1/2-14	.391	.531	1.330	1.470	1.010	7/8	5000
TX-8-12-ME	1/2	3/4-16	3/4-14	.391	.719	1.420	1.590	1.110	1 1/16	4000
TX-10-ME	5/8	7/8-14	1/2-14	.484	.531	1.450	1.470	1.010	7/8	5000
TX-10-6-ME	5/8	7/8-14	3/8-18	.484	.406	1.450	1.280	.930	7/8	5000
TX-10-12-ME	5/8	7/8-14	3/4-14	.484	.719	1.530	1.590	1.110	1 1/16	4000
TX-12-ME	3/4	1 1/16-12	3/4-14	.609	.719	1.660	1.590	1.110	1 1/16	4000
TX-12-8-ME	3/4	1 1/16-12	1/2-14	.609	.531	1.660	1.590	1.130	1 1/16	4500
TX-12-16-ME	3/4	1 1/16-12	1-11 1/2	.609	.938	1.760	1.970	1.390	1 5/16	3000
TX-14-ME	7/8	1 3/16-12	3/4-14	.718	.719	1.800	1.690	1.210	1 3/16	3500
TX-16-ME	1	1 5/16-12	1-11 1/2	.844	.938	1.810	1.970	1.400	1 5/16	3000
TX-16-12-ME	1	1 5/16-12	3/4-14	.844	.719	1.810	1.780	1.300	1 5/16	3500
TX-16-20-ME	1	1 5/16-12	1 1/4-11 1/2	.844	1.250	2.130	2.380	1.780	1 5/8	2500
TX-20-ME	1 1/4	1 5/8-12	1 1/4-11 1/2	1.078	1.250	2.060	2.380	1.790	1 5/8	2500
TX-20-16-ME	1 1/4	1 5/8-12	1-11 1/2	1.078	.938	2.060	2.060	1.490	1 5/8	3000
TX-20-24-ME	1 1/4	1 5/8-12	1 1/2-11 1/2	1.078	1.500	2.200	2.640	2.050	1 7/8	2000
TX-24-ME	1 1/2	1 7/8-12	1 1/2-11 1/2	1.312	1.500	2.330	2.640	2.050	1 7/8	2000
TX-24-20-ME	1 1/2	1 7/8-12	1 1/4-11 1/2	1.312	1.250	2.330	2.250	1.660	1 7/8	2000
TX-32-ME	2	2 1/2-12	2-11 1/2	1.781	1.938	3.060	3.000	2.390	2 1/2	1500


2501
MS51504
SAE 070202

Long Male Elbow • Flare Tube End/ Long Male Pipe End

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT PORT THD NPTF	D Drill	D1 Drill	M	N3	XX After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-LME	1/4	7/16-20	1/8-27	.172	.188	.890	1.170	.960	7/16	5000
TX-4-4-LME	1/4	7/16-20	1/4-18	.172	.281	1.050	1.440	1.100	9/16	5000
TX-6-LME	3/8	9/16-18	1/4-18	.297	.281	1.060	1.580	1.220	9/16	5000
TX-6-6-LME	3/8	9/16-18	3/8-18	.297	.406	1.140	2.340	1.990	3/4	5000
TX-8-LME	1/2	3/4-16	3/8-18	.391	.406	1.250	1.820	1.170	3/4	5000
TX-8-8-LME	1/2	3/4-16	1/2-14	.391	.531	1.340	2.160	1.690	7/8	5000
TX-10-LME	5/8	7/8-14	1/2-14	.484	.531	1.450	2.170	1.700	7/8	5000
TX-12-LME	3/4	1 1/16-12	3/4-14	.609	.719	1.660	2.440	1.930	1 1/16	4000
TX-16-LME	1	1 5/16-12	1-11 1/2	.844	.938	1.810	3.010	2.350	1 5/16	3000

2501-L
SAE 071502

TX-LME

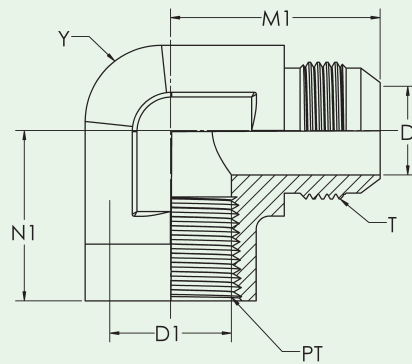

TX-FE

Female Elbow • Flare Tube End/Female Pipe End


2502

MS51506


SAE 070203

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port Thread NPTF	D Drill	D1 Drill	M1	N1	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-FE	1/4	7/16-20	1/8-27	.172	.172	1.080	.660	9/16	5000
TX-4-4-FE	1/4	7/16-20	1/4-18	.172	.172	1.220	.880	3/4	5000
TX-5-FE	5/16	1/2-20	1/8-27	.234	.234	1.080	.660	9/16	5000
TX-5-4-FE	5/16	1/2-20	1/4-18	.234	.234	1.130	.880	3/4	5000
TX-6-FE	3/8	9/16-18	1/4-18	.297	.297	1.230	.880	3/4	5000
TX-6-2-FE	3/8	9/16-18	1/8-27	.297	.297	1.230	.670	9/16	5000
TX-6-6-FE	3/8	9/16-18	3/8-18	.297	.297	1.310	1.020	7/8	4500
TX-8-FE	1/2	3/4-16	3/8-18	.391	.391	1.420	1.020	7/8	3000
TX-8-4-FE	1/2	3/4-16	1/4-18	.391	.391	1.420	1.010	3/4	5000
TX-8-8-FE	1/2	3/4-16	1/2-14	.391	.391	1.520	1.230	1 1/16	3000
TX-10-FE	5/8	7/8-14	1/2-14	.484	.484	1.640	1.230	1 1/16	3000
TX-12-FE	3/4	1 1/16-12	3/4-14	.609	.609	1.890	1.360	1 5/16	3000
TX-12-8-FE	3/4	1 1/16-12	1/2-14	.609	.609	1.890	1.350	1 1/16	3000
TX-14-FE	7/8	1 3/16-12	3/4-14	.718	.718	1.860	1.420	1 5/16	3000
TX-16-FE	1	1 5/16-12	1-11 1/2	.844	.844	2.170	1.630	1 5/8	1750
TX-20-FE	1 1/4	1 5/8-12	1 1/4-11 1/2	1.078	1.078	2.330	1.700	1 7/8	1500
TX-24-FE	1 1/2	1 7/8-12	1 1/2-11 1/2	1.312	1.312	2.890	2.080	2 1/2	1500

TX-ME-45

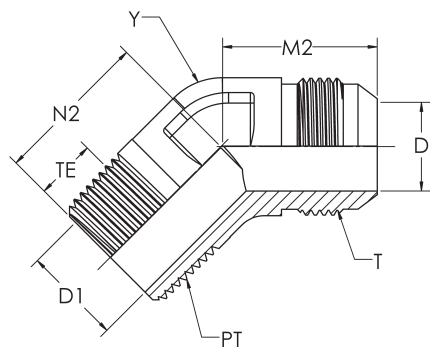

TX-E-45

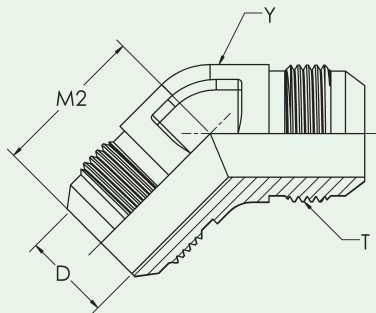

Flared Fittings

TX

Male Elbow-45 • Flare Tube End/Male Pipe End

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	D Drill	D1 Drill	M2	N2	TE	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-2-ME-45	1/8	5/16-24	1/8-27	.062	.188	.690	.530	.240	7/16	5000
TX-3-ME-45	3/16	3/8-24	1/8-27	.125	.188	.690	.530	.240	7/16	5000
TX-4-ME-45	1/4	7/16-20	1/8-27	.172	.188	.720	.640	.240	7/16	5000
TX-4-4-ME-45	1/4	7/16-20	1/4-18	.172	.281	.820	.860	.340	9/16	5000
TX-5-ME-45	5/16	1/2-20	1/8-27	.234	.188	.770	.640	.240	9/16	5000
TX-5-4-ME-45	5/16	1/2-20	1/4-18	.234	.281	.820	.860	.340	9/16	5000
TX-6-ME-45	3/8	9/16-18	1/4-18	.297	.281	.830	.860	.340	9/16	5000
TX-6-2-ME-45	3/8	9/16-18	1/8-27	.297	.188	.830	.670	.240	9/16	5000
TX-6-6-ME-45	3/8	9/16-18	3/8-18	.297	.406	.870	.950	.350	3/4	5000
TX-6-8-ME-45	3/8	9/16-18	1/2-14	.297	.531	1.060	1.170	.460	7/8	5000
TX-8-ME-45	1/2	3/4-16	3/8-18	.391	.406	.980	.950	.350	3/4	5000
TX-8-4-ME-45	1/2	3/4-16	1/4-18	.391	.281	.980	.950	.340	3/4	5000
TX-8-8-ME-45	1/2	3/4-16	1/2-14	.391	.531	.990	1.170	.460	7/8	5000
TX-8-12-ME-45	1/2	3/4-16	3/4-14	.391	.719	1.040	1.200	.480	1 1/16	4000
TX-10-ME-45	5/8	7/8-14	1/2-14	.484	.531	1.110	1.170	.460	7/8	5000
TX-10-6-ME-45	5/8	7/8-14	3/8-18	.484	.406	1.110	.980	.350	7/8	5000
TX-10-12-ME-45	5/8	7/8-14	3/4-14	.484	.719	1.280	1.200	.480	1 1/16	4000
TX-12-ME-45	3/4	1 1/16-12	3/4-14	.609	.719	1.280	1.200	.480	1 1/16	4000
TX-12-8-ME-45	3/4	1 1/16-12	1/2-14	.609	.531	1.280	1.200	.460	1 1/16	4500
TX-12-16-ME-45	3/4	1 1/16-12	1-11 1/2	.609	.938	1.420	1.480	.570	1 5/16	3000
TX-14-ME-45	7/8	1 3/16-12	3/4-14	.718	.719	1.390	1.270	.480	1 5/16	3500
TX-16-ME-45	1	1 5/16-12	1-11 1/2	.844	.938	1.470	1.480	.570	1 5/16	3000
TX-16-12-ME-45	1	1 5/16-12	3/4-14	.844	.719	1.470	1.290	.480	1 5/16	3500
TX-20-ME-45	1 1/4	1 5/8-12	1 1/4-11 1/2	1.078	1.250	1.590	1.670	.590	1 5/8	2500
TX-24-ME-45	1 1/2	1 7/8-12	1 1/2-11 1/2	1.312	1.500	1.780	1.770	.590	1 7/8	2000
TX-32-ME-45	2	2 1/2-12	2-11 1/2	1.781	1.938	2.220	2.110	.610	2 1/2	1500

2503
MS51508
SAE 070302

Union Elbow-45 • Male Flare End/Male Flare End

Part #	Tube O.D.	T Tube End UN/UNF-2A	D	M2	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-3-E-45	3/16	3/8-24	.125	.69	7/16	5000
TX-4-E-45	1/4	7/16-20	.172	.72	7/16	5000
TX-6-E-45	3/8	9/16-18	.297	.83	9/16	5000
TX-8-E-45	1/2	3/4-16	.391	.98	3/4	5000
TX-10-E-45	5/8	7/8-14	.484	1.11	7/8	5000
TX-12-E-45	3/4	1 1/16-12	.609	1.28	1 3/16	4500
TX-16-E-45	1	1 5/16-12	.844	1.47	1 5/16	3500

2504
SAE 071502



TX-E-45

800.333.2636

Omega1.com

TX-TTM

TX-TTF

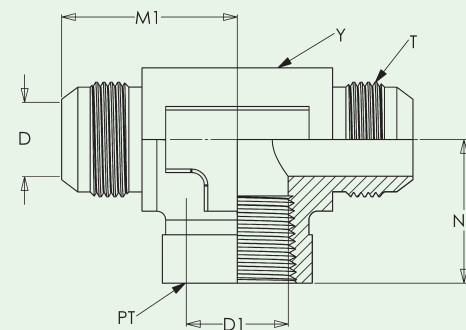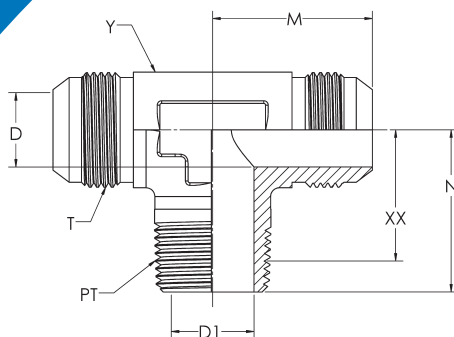

TX-TTM

Male Branch Tee • Flare Tube End/Male Pipe End

2601

MS51512

SAE 070425

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	D Drill	D1 Drill	M	N	XX After Assembly	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-3-TTM	3/16	3/8-24	1/8-27	.125	.188	.830	.720	.480	7/16	5000
TX-4-4-2-TTM	1/4	7/16-20	1/8-27	.172	.188	.890	.780	.540	7/16	5000
TX-4-4-4-TTM	1/4	7/16-20	1/4-18	.172	.281	1.050	1.090	.750	9/16	5000
TX-5-5-2-TTM	5/16	1/2-20	1/8-27	.234	.188	.970	.810	.570	9/16	5000
TX-6-6-4-TTM	3/8	9/16-18	1/4-18	.297	.281	1.060	1.090	.750	9/16	5000
TX-6-6-6-TTM	3/8	9/16-18	3/8-18	.297	.406	1.140	1.220	.870	3/4	5000
TX-8-8-6-TTM	1/2	3/4-16	3/8-18	.391	.406	1.250	1.220	.870	3/4	5000
TX-8-8-8-TTM	1/2	3/4-16	1/2-14	.391	.531	1.340	1.470	1.010	7/8	5000
TX-10-10-8-TTM	5/8	7/8-14	1/2-14	.484	.531	1.450	1.470	1.010	7/8	5000
TX-12-12-12-TTM	3/4	1 1/16-12	3/4-14	.609	.719	1.660	1.590	1.110	1 1/16	4000
TX-14-TTM	7/8	1 3/16-12	3/4-14	.718	.719	1.800	1.690	1.210	1 5/16	3500
TX-16-16-16-TTM	1	1 5/16-12	1-11 1/2	.844	.938	1.810	1.970	1.400	1 5/16	3000
TX-20-TTM	1 1/4	1 5/8-12	1 1/4-11 1/2	1.078	1.250	2.060	2.380	1.790	1 5/8	2500
TX-24-TTM	1 1/2	1 7/8-12	1 1/2-11 1/2	1.312	1.500	2.330	2.640	2.050	1 7/8	2000

M10° - CENTER TO BASE OF FLARE SEAT

TX-TTF

Female Branch Tee • Flare Tube End/Female Pipe End


2602

MS51513


SAE 070427

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT PORT THD NPTF	D Drill	Ref D1 Drill	M1	N1	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-4-2-TTF	1/4	7/16-20	1/8-27	.172	.328	1.080	.660	9/16	5000
TX-4-4-4-TTF	1/4	7/16-20	1/4-18	.172	.422	1.220	.880	3/4	5000
TX-5-5-2-TTF	5/16	1/2-20	1/8-27	.234	.328	1.080	.660	9/16	5000
TX-6-6-4-TTF	3/8	9/16-18	1/4-18	.297	.422	1.230	.880	3/4	5000
TX-6-6-6-TTF	3/8	9/16-18	3/8-18	.297	.563	1.230	1.020	7/8	4500
TX-8-8-6-TTF	1/2	3/4-16	3/8-18	.391	.563	1.420	1.020	7/8	3000
TX-10-10-8-TTF	5/8	7/8-14	1/2-14	.484	.688	1.640	1.230	1 1/16	3000
TX-12-12-12-TTF	3/4	1 1/16-12	3/4-14	.609	.891	1.890	1.360	1 5/16	3000
TX-14-TTF	7/8	1 3/16-12	3/4-14	.718	.891	1.860	1.420	1 5/16	3000
TX-16-16-16-TTF	1	1 5/16-12	1-11 1/2	.844	1.125	2.170	1.630	1 5/8	1750
TX-20-TTF	1 1/4	1 5/8-12	1 1/4-11 1/2	1.078	1.469	2.330	1.700	1 7/8	1500
TX-24-TTF	1 1/2	1 7/8-12	1 1/2-11 1/2	1.312	1.703	2.890	2.080	2 1/2	1500

TX-T

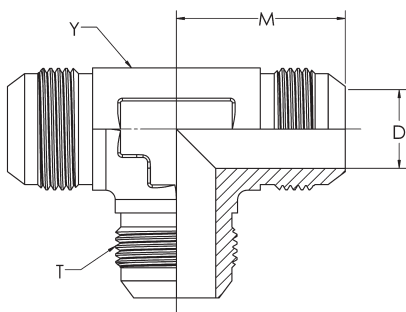

TX-TMT

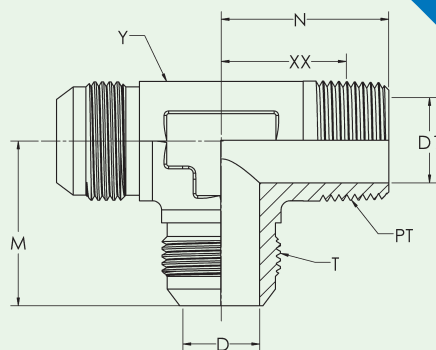

Flared Fittings

TX

TX-T

Union Tee • Flare Tube End (all three ends)

Tube Fitting Part #	Tube O.D.	T Port Thread UN/UNF-2A	D Drill	M	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-2-T	1/8	5/16-24	.062	.78	7/16	5000
TX-3-T	3/16	3/8-24	.125	.83	7/16	5000
TX-4-T	1/4	7/16-20	.172	.89	7/16	5000
TX-5-T	5/16	1/2-20	.234	.95	9/16	5000
TX-6-T	3/8	9/16-18	.297	1.06	9/16	5000
TX-8-T	1/2	3/4-16	.391	1.25	3/4	5000
TX-10-T	5/8	7/8-14	.484	1.45	7/8	5000
TX-12-T	3/4	1 1/16-12	.609	1.66	1 1/16	5000
TX-14-T	7/8	1 3/16-12	.718	1.73	1 5/16	3500
TX-16-T	1	1 5/16-12	.844	1.81	1 5/16	3500
TX-20-T	1 1/4	1 5/8-12	1.078	2.06	1 5/8	3000
TX-24-T	1 1/2	1 7/8-12	1.312	2.33	1 7/8	2000

2603
MS51510
SAE 070401

TX-TMT

Male Run Tee • Flare Tube End/Male Pipe End

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	D Drill	D1 Drill	M	N	XX After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-3-TMT	3/16	3/8-24	1/8-27	.125	.188	.830	.720	.480	7/16	5000
TX-4-2-4-TMT	1/4	7/16-20	1/8-27	.172	.188	.890	.780	.540	7/16	5000
TX-4-4-4-TMT	1/4	7/16-20	1/4-18	.172	.281	1.050	1.090	.750	9/16	5000
TX-5-2-5-TMT	5/16	1/2-20	1/8-27	.234	.188	.970	.810	.570	9/16	5000
TX-6-4-6-TMT	3/8	9/16-18	1/4-18	.297	.281	1.060	1.090	.750	9/16	5000
TX-6-6-6-TMT	3/8	9/16-18	3/8-18	.297	.406	1.140	1.220	.870	3/4	5000
TX-8-6-8-TMT	1/2	3/4-16	3/8-18	.391	.406	1.250	1.220	.870	3/4	5000
TX-8-8-8-TMT	1/2	3/4-16	1/2-14	.391	.531	1.340	1.470	1.010	7/8	5000
TX-10-8-10-TMT	5/8	7/8-14	1/2-14	.484	.531	1.450	1.470	1.010	7/8	5000
TX-12-12-12-TMT	3/4	1 1/16-12	3/4-14	.609	.719	1.660	1.590	1.110	1 1/16	4000
TX-14-TMT	7/8	1 3/16-12	3/4-14	.718	.719	1.800	1.690	1.210	1 5/16	3500
TX-16-16-16-TMT	1	1 5/16-12	1-11 1/2	.844	.938	1.810	1.970	1.400	1 5/16	3000
TX-20-TMT	1 1/4	1 5/8-12	1 1/4-11 1/2	1.078	1.250	2.060	2.380	1.790	1 5/8	2500
TX-24-TMT	1 1/2	1 7/8-12	1 1/2-11 1/2	1.312	1.500	2.330	2.640	2.050	1 7/8	2000

2605
MS51511
SAE 070424



*D1 DRILL MAY BE PRESENT DUE TO MANUFACTURING OPTION PER SAE J514

800.333.2636

Omega1.com

TX-TFT

TX-BU

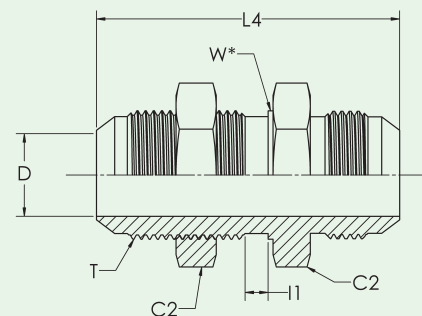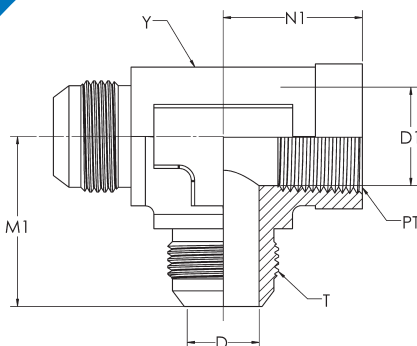

TX-TFT

Female Run Tee • Flare Tube End/Female Tube End

2606

MS51514

SAE 070425

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT PORT THD NPTF	D Drill	Ref D1 Drill	M1	N1	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-2-4-TFT	1/4	7/16-20	1/8-27	.172	.328	1.080	.660	9/16	5000
TX-4-4-4-TFT	1/4	7/16-20	1/4-18	.172	.422	1.220	.880	3/4	5000
TX-6-4-6-TFT	3/8	9/16-18	1/4-18	.297	.422	1.230	.880	3/4	5000
TX-6-6-6-TFT	3/8	3/8	3/8-18	.297	.563	1.310	1.020	7/8	4500
TX-8-6-8-TFT	1/2	3/4-16	3/8-18	.391	.563	1.420	1.020	7/8	3000
TX-8-8-8-TFT	1/2	1/2	1/2-14	.391	.688	1.520	1.230	1 1/16	3000
TX-10-8-10-TFT	5/8	7/8-14	1/2-14	.484	.688	1.640	1.230	1 1/16	3000
TX-12-12-12-TFT	3/4	1 1/16-12	3/4-14	.609	.891	1.890	1.360	1 5/16	3000
TX-14-TFT	7/8	1 3/16-12	3/4-14	.718	.891	1.860	1.420	1 5/16	3000
TX-16-16-16-TFT	1	1 5/16-12	1-11 1/2	.844	1.125	2.170	1.630	1 5/8	1750
TX-20-TFT	1 1/4	1 5/8-12	1 1/4-11 1/2	1.078	1.469	2.330	1.700	1 7/8	1500
TX-24-TFT	1 1/2	1 7/8-12	1 1/2-11 1/2	1.312	1.703	2.890	2.080	2 1/2	1500

TX-BU

Bulkhead Union • Flare Tube End/Flare Tube End


2700

MS51520

SAE 070601

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	C2 Hex	D Drill	I1	L4	W DIA.	Dynamic Pressure Rtg.
TX-3-BU	3/16	3/8-24	5/8	.125	1.110	1.910	.380	7700
TX-4-BU	1/4	7/16-20	11/16	.172	1.200	2.070	.440	7700
TX-5-BU	5/16	1/2-20	3/4	.234	1.200	2.080	.500	7700
TX-6-BU	3/8	9/16-18	13/16	.297	1.280	2.190	.560	7700
TX-8-BU	1/2	3/4-16	1	.391	1.440	2.440	.750	7700
TX-10-BU	5/8	7/8-14	1 1/8	.484	1.580	2.750	.880	6000
TX-12-BU	3/4	1 1/16-12	1 3/8	.609	1.750	3.090	1.060	6000
TX-14-BU	7/8	1 3/16-12	1 1/2	.718	1.750	3.130	1.190	4800
TX-16-BU	1	1 5/16-12	1 5/8	.844	1.750	3.140	1.310	4800
TX-20-BU	1 1/4	1 5/8-12	1 7/8	1.078	1.800	3.310	1.630	3600
TX-24-BU	1 1/2	1 7/8-12	2 1/8	1.312	1.810	3.520	1.880	2400

W* - BULKHEAD PILOT DIAMETER RECOMMENDED CLEARANCE HOLE +.015" OVER "W" DIAMETER

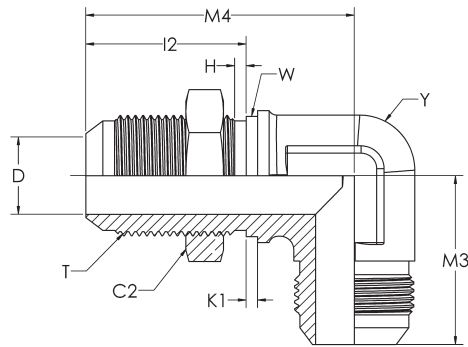

Bulkhead Union Elbow • Flare Tube End/Flare Tube End

TX-BE

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	C2 Hex	D Drill	I2	K1	M3	M4	W DIA.	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-BE	1/4	7/16-20	11/16	.172	1.020	.090	.970	1.590	.440	7/16	5000
TX-5-BE	5/16	1/2-20	3/4	.234	1.020	.090	1.060	1.720	.500	9/16	5000
TX-6-BE	3/8	9/16-18	13/16	.297	1.090	.090	1.090	1.810	.560	9/16	5000
TX-8-BE	1/2	3/4-16	1	.391	1.250	.130	1.360	2.110	.750	3/4	5000
TX-10-BE	5/8	7/8-14	1 1/8	.484	1.390	.130	1.560	2.390	.880	7/8	5000
TX-12-BE	3/4	1 1/16-12	1 3/8	.609	1.560	.130	1.780	2.670	1.060	1 1/16	4500
TX-14-BE	7/8	1 3/16-12	1 1/2	.718	1.560	.130	1.920	2.800	1.190	1 5/8	3500
TX-16-BE	1	1 5/16-12	1 5/8	.844	1.560	.130	1.940	2.800	1.310	1 5/8	3500
TX-20-BE	1 1/4	1 5/8-12	1 7/8	1.078	1.610	.130	2.170	3.130	1.630	1 5/8	3000



2701
SAE 070701

800.333.2636

Omega1.com

TX-BBT

TX-BRT

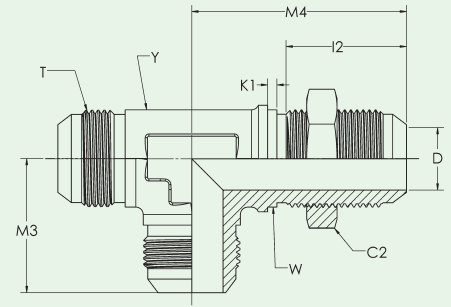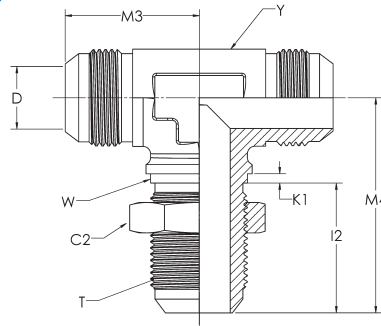

TX-BBT

Bulkhead Branch Tee • Flare Tube End (all three ends)

2703

SAE 070959

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	C2 Hex	D Drill	I2	K1	M3	M4	W DIA.	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-BBT	1/4	7/16-20	11/16	.172	1.020	.090	.970	1.590	.440	7/16	5000
TX-6-BBT	3/8	9/16-18	13/16	.297	1.090	.090	1.090	1.810	.560	9/16	5000
TX-8-BBT	1/2	3/4-16	1	.391	1.250	.130	1.360	2.110	.750	3/4	5000
TX-10-BBT	5/8	7/8-14	1 1/8	.484	1.390	.130	1.560	2.390	.880	7/8	5000
TX-12-BBT	3/4	1 1/16-12	1 3/8	.609	1.560	.130	1.780	2.670	1.060	1 1/16	4500
TX-16-BBT	1	1 5/16-12	1 5/8	.844	1.560	.130	1.940	2.800	1.310	1 7/16	3500
TX-20-BBT	1 1/4	1 5/8-12	1 7/8	1.078	1.610	.130	2.170	3.120	1.630	1 5/8	3000

W* - BULKHEAD PILOT DIA. RECOMMENDED CLEARANCE HOLE +.015 OVER W DIA.

TX-BRT

Bulkhead Run Tee • Flare Tube End (all three ends)


2704

SAE 070958


Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	C2 Hex	D Drill	I2	K1	M3	M4	W DIA.	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-BRT	1/4	7/16-20	11/16	.172	1.020	.090	.970	1.590	.440	7/16	5000
TX-6-BRT	3/8	9/16-18	13/16	.297	1.090	.090	1.090	1.810	.560	9/16	5000
TX-8-BRT	1/2	3/4-16	1	.391	1.250	.130	1.360	2.110	.750	3/4	5000
TX-10-BRT	5/8	7/8-14	1 1/8	.484	1.390	.130	1.560	2.390	.880	7/8	5000
TX-12-BRT	3/4	1 1/16-12	1 3/8	.609	1.560	.130	1.780	2.670	1.060	1 1/16	4500

W* - BULKHEAD PILOT DIA. RECOMMENDED CLEARANCE HOLE +.015 OVER W DIA.

TX-BFC

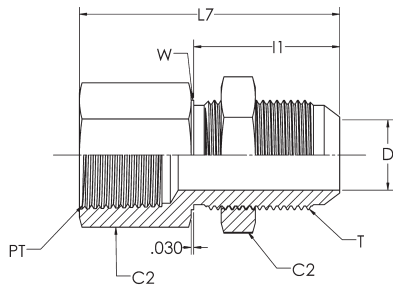

TX-BMC

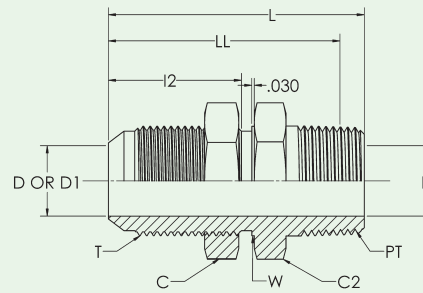

Flared Fittings

TX

TX-BFC

Female Bulkhead Connector • Flare Tube End/Female Pipe End

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT PORT THD NPTF	C2 Hex	D Drill	I1	L7	W Dia.	Dynamic Pressure Rtg
TX-4-BFC	1/4	7/16-20	1/8-27	11/16	.172	1.20	1.84	.44	6000
TX-4-4-BFC	1/4	7/16-20	1/4-18	3/4	.172	1.33	2.16	.44	6000
TX-6-BFC	3/8	9/16-18	1/4-18	13/16	.297	1.28	2.06	.56	6000
TX-8-BFC	1/2	3/4-16	3/8-18	1	.391	1.44	2.34	.75	6000
TX-10-BFC	5/8	7/8-14	1/2-14	1 1/8	.484	1.58	2.66	.88	6000
TX-12-BFC	3/4	1 1/16-12	3/4-14	1 3/8	.609	1.75	2.91	1.06	4800
TX-14-BFC	7/8	1 3/16-12	3/4-14	1 1/2	.718	1.75	2.89	1.19	4200
TX-16-BFC	1	1 5/16-12	1-11 1/2	1 5/8	.844	1.75	3.09	1.31	3600

2705


W* - BULKHEAD PILOT DIA. RECOMMENDED CLEARANCE HOLE +.015 OVER W DIA.

TX-BMC

Male Bulkhead Connector • Flare Tube End/Male Pipe End

Tube Fitting Part #	PT Port Thd. NPTF	T Port Thd. UN/UNF-2A	D Drill	D1 Drill	L	LL After Assy.	I1	C Hex	C2 Hex	W	Dynamic Pressure Rtg
TX-4-4-BMC	1/4-18	7/16-20	.172	.281	2.070	1.840	1.200	1/2	11/16	.44	6000
TX-6-BMC	1/4-18	9/16-18	.297	.281	2.150	1.810	1.280	13/16	13/16	.56	6000
TX-8-BMC	3/8-18	3/4-16	.391	.406	2.310	1.960	1.440	1	1	.75	6000
TX-8-8-BMC	1/2-14	3/4-16	.391	.531	2.560	2.100	1.440	1	1	.75	6000
TX-10-BMC	1/2-14	7/8-14	.484	.531	2.710	2.250	1.580	1 1/8	1 1/8	.88	6000
TX-12-BMC	3/4-14	1 1/16-12	.609	.719	2.950	2.470	1.750	1 1/8	1 3/8	1.06	4800
TX-16-BMC	1-11 1/2	1 5/16-12	.844	.938	3.140	2.570	1.750	1 5/8	1 5/8	1.31	3600

2706



TX-GC

Straight Thread Connector • Flare Tube End/Straight Thread O-Ring


6400-0

MS51525


SAE 070120

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T5 Port THD UN/UNF-2A	C4 Hex	D Drill	D2 Drill	L5	LL After Assy.	Dynamic Pressure Rtg
TX-2-GC	1/8	5/16-24	5/16-24	7/16	.062	.062	1.060	.760	7700
TX-3-GC	3/16	3/8-24	3/8-24	1/2	.125	.125	1.100	.800	7700
TX-4-GC	1/4	7/16-20	7/16-20	9/16	.172	.172	1.230	.870	7700
TX-4-5-GC	1/4	7/16-20	1/2-20	5/8	.172	.172	1.230	.870	7700
TX-4-6-GC	1/4	7/16-20	9/16-18	11/16	.172	.172	1.280	.890	7700
TX-4-8-GC	1/4	7/16-20	3/4-16	7/8	.172	.391	1.380	.940	7700
TX-5-GC	5/16	1/2-20	1/2-20	5/8	.234	.234	1.230	.870	7700
TX-5-4-GC	5/16	1/2-20	7/16-20	9/16	.234	.172	1.230	.870	7700
TX-5-6-GC	5/16	1/2-20	9/16-18	11/16	.234	.234	1.300	.910	7700
TX-6-GC	3/8	9/16-18	9/16-18	11/16	.297	.297	1.300	.910	7700
TX-6-4-GC	3/8	9/16-18	7/16-20	5/8	.297	.172	1.270	.910	7700
TX-6-5-GC	3/8	9/16-18	1/2-20	5/8	.297	.234	1.270	.910	7700
TX-6-8-GC	3/8	9/16-18	3/4-16	7/8	.297	.297	1.380	.940	7700
TX-6-10-GC	3/8	9/16-18	7/8-14	1	.297	.297	1.500	1.000	6000
TX-8-GC	1/2	3/4-16	3/4-16	7/8	.391	.391	1.480	1.040	7700
TX-8-4-GC	1/2	3/4-16	7/16-20	13/16	.391	.172	1.500	1.140	7700
TX-8-6-GC	1/2	3/4-16	9/16-18	13/16	.391	.297	1.440	1.050	7700
TX-8-10-GC	1/2	3/4-16	7/8-14	1	.391	.391	1.590	1.090	6000
TX-8-12-GC	1/2	3/4-16	1 1/16-12	1 1/4	.391	.391	1.770	1.180	6000
TX-8-16-GC	1/2	3/4-16	1 5/16-12	1 1/2	.391	.391	1.780	1.190	5400
TX-10-GC	5/8	7/8-14	7/8-14	1	.484	.484	1.700	1.200	6000
TX-10-8-GC	5/8	7/8-14	3/4-16	15/16	.484	.391	1.640	1.170	6000
TX-10-12-GC	5/8	7/8-14	1 1/16-12	1 1/4	.484	.484	1.860	1.270	6000
TX-12-GC	3/4	1 1/16-12	1 1/16-12	1 1/4	.609	.609	1.970	1.380	6000
TX-12-8-GC	3/4	1 1/16-12	3/4-16	1 1/8	.609	.391	1.940	1.500	6000
TX-12-10-GC	3/4	1 1/16-12	7/8-14	1 1/8	.609	.484	1.880	1.380	6000
TX-12-14-GC	3/4	1 1/16-12	1 3/16-12	1 3/8	.609	.609	1.970	1.370	5400
TX-12-16-GC	3/4	1 1/16-12	1 5/16-12	1 1/2	.609	.609	1.990	1.400	5400
TX-14-GC	7/8	1 3/16-12	1 3/16-12	1 3/8	.718	.718	1.990	1.400	5400
TX-14-16-GC	7/8	1 3/16-12	1 5/16-12	1 1/2	.718	.718	2.020	1.430	5400
TX-16-GC	1	1 5/16-12	1 5/16-12	1 1/2	.844	.844	2.040	1.460	5400
TX-16-10-GC	1	1 5/16-12	7/8-14	1 3/8	.844	.484	2.080	1.570	5400
TX-16-12-GC	1	1 5/16-12	1 1/16-12	1 3/8	.844	.609	1.990	1.400	5400
TX-16-14-GC	1	1 5/16-12	1 3/16-12	1 3/8	.844	.718	2.050	1.460	5400
TX-16-20-GC	1	1 5/16-12	1 5/8-12	1 7/8	.844	.844	2.130	1.540	3600
TX-20-GC	1 1/4	1 5/8-12	1 5/8-12	1 7/8	1.078	1.078	2.170	1.580	3600
TX-20-16-GC	1 1/4	1 5/8-12	1 5/16-12	1 11/16	1.078	.844	2.330	1.740	3600
TX-20-24-GC	1 1/4	1 5/8-12	1 7/8-12	2 1/8	1.078	1.078	2.240	1.650	2400
TX-24-GC	1 1/2	1 7/8-12	1 7/8-12	2 1/8	1.312	1.312	2.370	1.790	2400
TX-24-20-GC	1 1/2	1 7/8-12	1 5/8-12	2	1.312	1.078	2.530	1.940	1800
TX-32-GC	2	2 1/2-12	2 1/2-12	2 3/4	1.781	1.781	2.780	2.190	1800
TX-32-24-GC	2	2 1/2-12	1 7/8-12	2 5/8	1.781	1.312	2.780	2.350	1800

TX-LGC

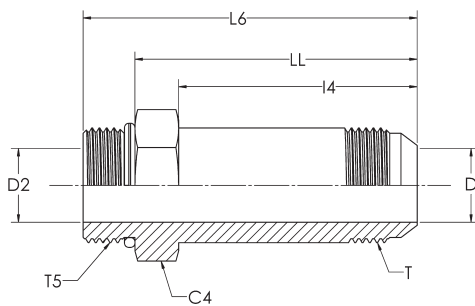

TX-SE

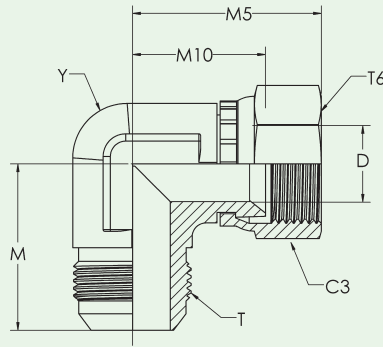

Flared Fittings

TX

TX-LGC

Long Straight Thread Connector • Flare Tube End/Straight Thread O-Ring

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T5 Port THD UN/UNF-2A	C4 Hex	D Drill	D2 Drill	I4	L6	LL After Assy.	Dynamic Pressure Rtg
TX-4-LGC	1/4	7/16-20	7/16-20	9/16	.172	.172	1.39	2.08	1.72	7700
TX-6-LGC	3/8	9/16-18	9/16-18	11/16	.297	.297	1.56	2.31	1.92	7700
TX-8-LGC	1/2	3/4-16	3/4-16	7/8	.391	.391	1.88	2.70	2.26	7700
TX-10-LGC	5/8	7/8-14	7/8-14	1	.484	.484	2.09	3.04	2.53	6000
TX-12-LGC	3/4	1 1/16-12	1 1/16-12	1 1/4	.609	.609	2.50	3.61	3.02	6000
TX-16-LGC	1	1 5/16-12	1 5/16-12	1 1/2	.844	.844	2.84	3.98	3.39	5400
TX-20-LGC	1 1/4	1 5/8-12	1 5/8-12	1 7/8	1.078	1.078	3.47	4.69	4.10	3600

6400-L
MS51526
SAE 070120

TX-SE

Swivel Nut Elbow • Flare Tube End/Swivel Nut End

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T6 Swivel UN/UNF-2B	C3 Hex	D Drill	M	M5	M10	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-3-SE	3/16	3/8-24	3/8-24	1/2	.125	.830	1.00	.630	7/16	7700
TX-4-SE	1/4	7/16-20	7/16-20	9/16	.172	.890	1.030	.660	7/16	7700
TX-5-SE	5/16	1/2-20	1/2-20	5/8	.234	.970	1.130	.780	9/16	6000
TX-6-SE	3/8	9/16-18	9/16-18	11/16	.297	1.060	1.250	.880	9/16	6000
TX-8-SE	1/2	3/4-16	3/4-16	7/8	.391	1.250	1.380	.950	3/4	6000
TX-10-SE	5/8	7/8-14	7/8-14	1	.484	1.450	1.620	1.130	7/8	5000
TX-12-SE	3/4	1 1/16-12	1 1/16-12	1 1/4	.609	1.660	1.750	1.190	1 1/16	5000
TX-14-SE	7/8	1 3/16-12	1 3/16-12	1 3/8	.718	1.730	1.780	1.330	1 5/16	2500
TX-16-SE	1	1 5/16-12	1 5/16-12	1 1/2	.844	1.810	2.000	1.410	1 5/16	2500
TX-20-SE	1 1/4	1 5/8-12	1 5/8-12	2	1.078	2.060	2.310	1.690	1 5/8	2500
TX-24-SE	1 1/2	1 7/8-12	1 7/8-12	2 1/4	1.312	2.330	2.590	1.860	1 7/8	2000

M10* - CENTER TO BASE OF FLARE SEAT



6500
MS51521
SAE 070221

800.333.2636

Omega1.com

TX-SE-45

TX-SBT

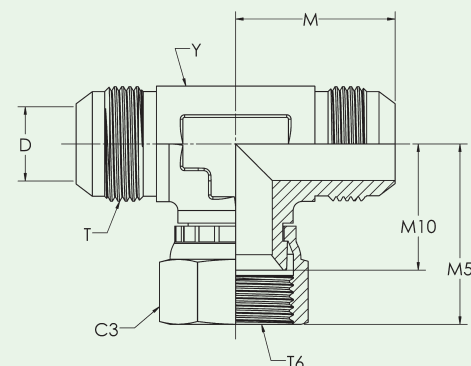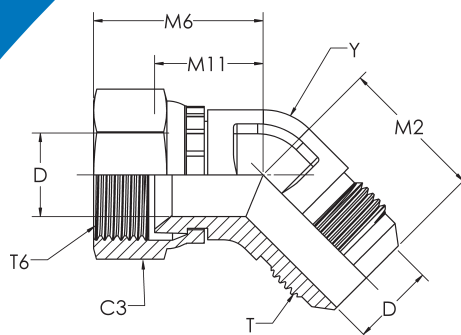

TX-SE-45

Swivel Nut Elbow • Flare Tube End/Swivel Nut End

6502

MS51522

SAE 070321

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T6 Swivel UN/UNF-2B	C3 Hex	D Drill	M2	M6	M11	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-SE-45	1/4	7/16-20	7/16-20	9/16	.172	.720	.940	.590	7/16	6000
TX-5-SE-45	5/16	1/2-20	1/2-20	5/8	.234	.770	1.000	.630	9/16	6000
TX-6-SE-45	3/8	9/16-18	9/16-18	11/16	.297	.830	1.120	.750	9/16	6000
TX-8-SE-45	1/2	3/4-16	3/4-16	7/8	.391	.980	1.280	.860	3/4	6000
TX-10-SE-45	5/8	7/8-14	7/8-14	1	.484	1.110	1.440	.940	7/8	5000
TX-12-SE-45	3/4	1 1/16-12	1 1/16-12	1 1/4	.609	1.280	1.500	.940	1 1/16	5000
TX-14-SE-45	7/8	1 3/16-12	1 3/16-12	1 3/8	.718	1.390	1.620	1.090	1 3/16	2500
TX-16-SE-45	1	1 5/16-12	1 5/16-12	1 1/2	.844	1.470	1.750	1.160	1 5/16	2500
TX-20-SE-45	1 1/4	1 5/8-12	1 5/8-12	2	1.078	1.590	2.030	1.410	1 5/8	2500
TX-24-SE-45	1 1/2	1 7/8-12	1 7/8-12	2 1/4	1.312	1.780	2.250	1.560	1 7/8	2000

*M11 - CENTER TO BASE OF FLARE SEAT

TX-SBT

Swivel Nut Branch Tee • Flare Tube End/Swivel Nut End

6600


MS51524

SAE 070433


Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T6 Swivel UN/UNF-2B	C3 Hex	D Drill	M	M5	M10	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-SBT	1/4	7/16-20	7/16-20	9/16	.172	.890	1.000	.660	7/16	6000
TX-5-SBT	5/16	1/2-20	1/2-20	5/8	.234	.950	1.060	.680	9/16	6000
TX-6-SBT	3/8	9/16-18	9/16-18	11/16	.297	1.060	1.250	.880	9/16	6000
TX-8-SBT	1/2	3/4-16	3/4-16	7/8	.391	1.250	1.380	.950	3/4	6000
TX-10-SBT	5/8	7/8-14	7/8-14	1	.484	1.450	1.620	1.130	7/8	5000
TX-12-SBT	3/4	1 1/16-12	1 1/16-12	1 1/4	.609	1.660	1.750	1.190	1 1/16	5000
TX-14-SBT	7/8	1 3/16-12	1 3/16-12	1 3/8	.718	1.800	1.780	1.330	1 5/16	2500
TX-16-SBT	1	1 5/16-12	1 5/16-12	1 1/2	.844	1.810	2.000	1.410	1 5/16	2500
TX-20-SBT	1 1/4	1 5/8-12	1 5/8-12	2	1.078	2.06	2.31	1.69	1 5/8	2500

M10* - CENTER TO BASE OF FLARE SEAT

TX-SRT

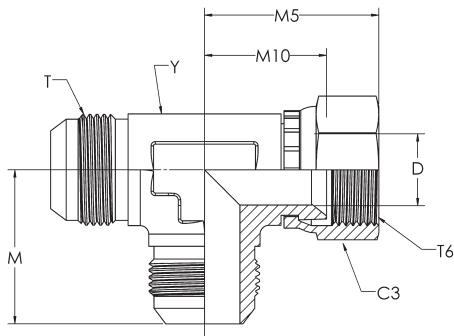

TX-GE

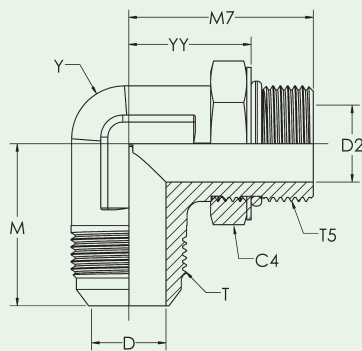

Flared Fittings

TX

TX-SRT

Swivel Nut Run Tee • Flare Tube End/Swivel Nut End

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T6 Swivel UN/UNF-2A	C3 Hex	D Drill	M	M5	M10	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-SRT	1/4	7/16-20	7/16-20	9/16	.172	.890	1.000	.660	7/16	6000
TX-5-SRT	5/16	1/2-20	1/2-20	5/8	.234	.950	1.060	.780	9/16	6000
TX-6-SRT	3/8	9/16-18	9/16-18	11/16	.297	1.060	1.250	.880	9/16	6000
TX-8-SRT	1/2	3/4-16	3/4-16	7/8	.391	1.250	1.380	.950	3/4	6000
TX-10-SRT	5/8	7/8-14	7/8-14	1	.484	1.450	1.620	1.130	7/8	5000
TX-12-SRT	3/4	1 1/16-12	1 1/16-12	1 1/4	.609	1.660	1.750	1.190	1 1/16	5000
TX-14-SRT	7/8	1 3/16-12	1 3/16-12	1 3/8	.718	1.800	1.780	1.330	1 5/16	2500
TX-16-SRT	1	1 5/16-12	1 5/16-12	1 1/2	.844	1.810	2.000	1.410	1 5/16	2500
TX-20-SRT	1 1/4	1 5/8-12	1 5/8-12	2	1.078	2.060	2.310	1.690	1 5/8	2500
TX-24-SRT	1 1/2	1 7/8-12	1 7/8-12	2 1/4	1.312	2.330	2.590	1.860	1 7/8	2000

M10* - CENTER TO BASE OF FLARE SEAT

6602
MS51523
SAE 070432

TX-GE

Straight Thread Elbow • Flare Tube End/Straight Thread O-ring


Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T5 Port THD UN/UNF-2A	C4 Hex	D Drill	D2 Drill	M	M7	YY After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-2-GE	1/8	5/16-24	5/16-24	7/16	.062	.062	.770	.940	.580	7/16	5000
TX-3-GE	3/16	3/8-24	3/8-24	1/2	.125	.125	.830	.940	.610	7/16	5000
TX-4-GE	1/4	7/16-20	7/16-20	9/16	.172	.172	.890	1.030	.640	7/16	5000
TX-4-6-GE	1/4	7/16-20	9/16-18	11/16	.172	.297	.050	1.250	.820	9/16	5000
TX-5-GE	5/16	1/2-20	1/2-20	5/8	.234	.234	.950	1.130	.700	9/16	5000
TX-5-4-GE	5/16	1/2-20	7/16-20	9/16	.234	.172	.950	1.130	.740	9/16	5000
TX-5-6-GE	5/16	1/2-20	9/16-18	11/16	.234	.297	.940	1.250	.790	9/16	5000
TX-6-GE	3/8	9/16-18	9/16-18	11/16	.297	.297	1.060	1.250	.820	9/16	5000
TX-6-4-GE	3/8	9/16-18	7/16-20	5/8	.297	.172	1.060	1.190	.800	9/16	5000
TX-6-5-GE	3/8	9/16-18	1/2-20	5/8	.297	.234	1.060	1.190	.720	9/16	5000
TX-6-8-GE	3/8	9/16-18	3/4-16	7/8	.297	.391	1.140	1.450	.960	3/4	5000
TX-6-10-GE	3/8	9/16-18	7/8-14	1	.297	.484	1.230	1.700	1.240	7/8	4500
TX-8-GE	1/2	3/4-16	3/4-16	7/8	.391	.391	1.250	1.450	.960	3/4	5000
TX-8-6-GE	1/2	3/4-16	9/16-18	13/16	.391	.297	1.250	1.360	.890	3/4	5000
TX-8-10-GE	1/2	3/4-16	7/8-14	1	.391	.484	1.340	1.700	1.140	7/8	5000
TX-8-12-GE	1/2	3/4-16	1 1/16-12	1 1/4	.391	.609	1.420	1.940	1.470	1 1/16	4000
TX-10-GE	5/8	7/8-14	7/8-14	1	.484	.484	1.450	1.700	1.140	7/8	4500
TX-10-8-GE	5/8	7/8-14	3/4-16	15/16	.484	.391	1.450	1.550	1.060	7/8	5000
TX-10-12-GE	5/8	7/8-14	1 1/16-12	1 1/4	.484	.609	1.530	1.940	1.790	1 1/16	4000
TX-12-GE	3/4	1 1/16-12	1 1/16-12	1 1/4	.609	.609	1.660	1.940	1.290	1 1/16	4000
TX-12-8-GE	3/4	1 1/16-12	3/4-16	1 1/8	.609	.391	1.660	1.630	1.160	1 1/16	4000
TX-12-10-GE	3/4	1 1/16-12	7/8-14	1 1/8	.609	.484	1.660	1.780	1.220	1 1/16	4000
TX-12-16-GE	3/4	1 1/16-12	1 5/16-12	1 1/2	.609	.844	1.810	2.050	1.400	1 5/16	3000
TX-14-GE	7/8	1 3/16-12	1 3/16-12	1 3/8	.718	.718	1.800	2.000	1.350	1 5/16	3000
TX-16-GE	1	1 5/16-12	1 5/16-12	1 1/2	.844	.844	1.810	2.050	1.400	1 5/16	3000
TX-16-12-GE	1	1 5/16-12	1 1/16-12	1 3/8	.844	.609	1.810	2.050	1.400	1 5/16	3000
TX-20-GE	1 1/4	1 5/8-12	1 5/8-12	1 7/8	1.078	1.078	2.060	2.250	1.600	1 5/8	2500
TX-20-16-GE	1 1/4	1 5/8-12	1 5/16-12	1 1/2	1.078	.844	2.060	2.250	1.600	1 5/8	2500
TX-24-GE	1 1/2	1 7/8-12	1 7/8-12	2 1/8	1.312	1.312	2.330	2.390	1.740	1 7/8	2000
TX-24-20-GE	1 1/2	1 7/8-12	1 5/8-12	1 7/8	1.312	1.078	2.330	2.390	1.740	1 7/8	2000
TX-32-GE	2	2 1/2-12	2 1/2-12	2 3/4	1.781	1.781	3.060	2.890	2.300	2 1/2	1500

6801
MS51527
SAE 070220


800.333.2636

Omega1.com

TX-GE-45

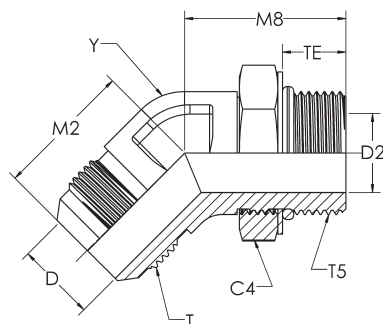

TX-GBT

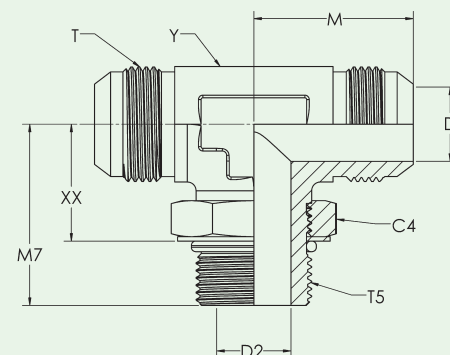

TX-GE-45

Straight Thread Elbow-45 • Flare Tube End/Straight Thread O-ring

6802

MS51528

SAE 070320

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T5 Port THD UN/UNF-2A	C4 Hex	D Drill	D2 Drill	M2	M8	TE	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-GE-45	1/4	7/16-20	7/16-20	9/16	.172	.172	.720	1.050	.390	7/16	6000
TX-5-GE-45	5/16	1/2-20	1/2-20	5/8	.234	.234	.770	1.050	.390	9/16	5400
TX-6-GE-45	3/8	9/16-18	9/16-18	11/16	.297	.297	.830	1.140	.430	9/16	5400
TX-8-GE-45	1/2	3/4-16	3/4-16	7/8	.391	.391	.980	1.300	.490	3/4	5400
TX-10-GE-45	5/8	7/8-14	7/8-14	1	.484	.484	1.110	1.520	.560	7/8	5400
TX-12-GE-45	3/4	1 1/16-12	1 1/16-12	1 1/4	.609	.609	1.280	1.730	.650	1 1/16	5400
TX-14-GE-45	7/8	1 3/8-12	1 3/8-12	1 3/4	.718	.718	1.450	1.860	.650	1 5/16	3000
TX-16-GE-45	1	1 5/8-12	1 5/8-12	1 7/8	.844	.844	1.660	1.940	.650	1 7/8	2000
TX-20-GE-45	1 1/4	2 1/8-12	2 1/8-12	2 1/2	1.078	1.078	2.078	2.500	.650		
TX-24-GE-45	1 1/2	2 3/4-12	2 3/4-12	3	1.312	1.312	2.312	2.750	.650		

TX-GBT

Straight Thread Branch Tee • Flare Tube End/Straight Thread O-ring


6803

MS51529


SAE 070429

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T5 Port THD UN/UNF-2A	C4 Hex	D Drill	D2 Drill	M	M7	XX After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-GBT	1/4	7/16-20	7/16-20	9/16	.172	.172	.890	1.030	.640	7/16	6000
TX-5-GBT	5/16	1/2-20	1/2-20	5/8	.234	.234	.970	1.130	.700	9/16	5400
TX-6-GBT	3/8	9/16-18	9/16-18	11/16	.297	.297	1.060	1.250	.820	9/16	5400
TX-8-GBT	1/2	3/4-16	3/4-16	7/8	.391	.391	1.250	1.450	.960	3/4	5400
TX-10-GBT	5/8	7/8-14	7/8-14	1	.484	.484	1.450	1.700	1.140	7/8	5400
TX-12-GBT	3/4	1 1/16-12	1 1/16-12	1 1/4	.609	.609	1.660	1.940	1.290	1 1/16	5400
TX-16-GBT	1	1 5/8-12	1 5/8-12	1 7/8	.844	.844	1.810	2.050	1.400	1 5/16	3000

TX-GRT

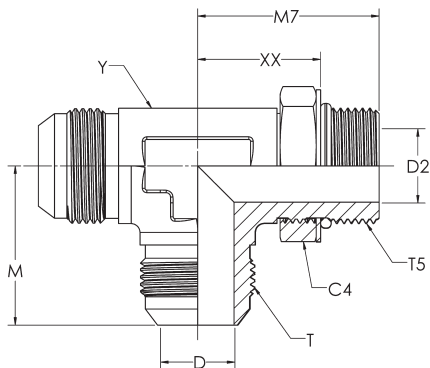

JS-ME

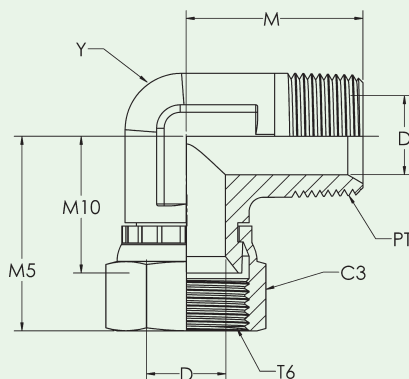

Flared Fittings

TX

TX-GRT

Straight Thread Run Tee • Flare Tube End/Straight Thread O-ring

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T5 Port THD UN/UNF-2A	C4 Hex	D Drill	D2 Drill	M	M7	XX After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
TX-4-GRT	1/4	7/16-20	7/16-20	9/16	.172	.172	.890	1.030	7/16	.640	6000
TX-5-GRT	5/16	1/2-20	1/2-20	5/8	.234	.234	.970	1.130	9/16	.700	5400
TX-6-GRT	3/8	9/16-18	9/16-18	11/16	.297	.297	1.060	1.250	9/16	.820	5400
TX-8-GRT	1/2	3/4-16	3/4-16	7/8	.391	.391	1.250	1.450	3/4	.960	5400
TX-10-GRT	5/8	7/8-14	7/8-14	1	.484	.484	1.450	1.700	7/8	1.140	5400
TX-12-GRT	3/4	1 1/16-12	1 1/16-12	1 1/4	.609	.609	1.660	1.940	1 1/16	1.290	5400
TX-14-GRT	7/8	1 3/16-12	1 3/16-12	1 3/8	.718	.718	1.730	2.000	1 5/16	1.350	3000
TX-16-GRT	1	1 5/16-12	1 5/16-12	1 1/2	.844	.844	1.810	2.050	1 5/16	1.400	3000
TX-20-GRT	1 1/4	1 5/8-12	1 5/8-12	1 7/8	1.078	1.078	2.060	2.250	1 5/8	1.600	2500
TX-24-GRT	1 1/2	1 7/8-12	1 7/8-12	2 1/8	1.312	1.312	2.330	2.390	1 7/8	1.740	2000

6804
MS51530
SAE 070428

Elbow 90 JIC Swivel/Male

Tube Fitting Part #	PT Port THD NPTF	T6 UN/UNF-2B	C3 Hex	D Drill	M	M5	M10	Y Across Wrench Flats	Dynamic Pressure Rtg
JS-4-ME	1/8-27	7/16-20	9/16	.172	.78	1.01	.66	7/16	5000
JS-4-4-ME	1/4-18	7/16-20	9/16	.172	1.09	1.13	.78	9/16	5000
JS-6-ME	1/4-18	9/16-18	11/16	.297	1.09	1.27	.88	9/16	4500
JS-6-6-ME	3/8-18	9/16-20	11/16	.297	1.22	1.27	.88	3/4	4500
JS-8-ME	3/8-18	3/4-16	7/8	.391	1.22	1.34	.95	3/4	4000
JS-8-8-ME	1/2-14	3/4-16	7/8	.391	1.47	1.48	1.09	7/8	4000
JS-10-ME	1/2-14	7/8-14	1	.484	1.47	1.62	1.11	7/8	4000
JS-12-ME	3/4-14	1 1/16-12	1 1/4	.609	1.59	1.75	1.18	1 1/16	3500
JS-16-ME	1-11	1 5/16-12	1 1/2	.844	1.97	2.01	1.41	1 5/16	2500


JS-ME

6501


800.333.2636

Omega1.com

JS-JS

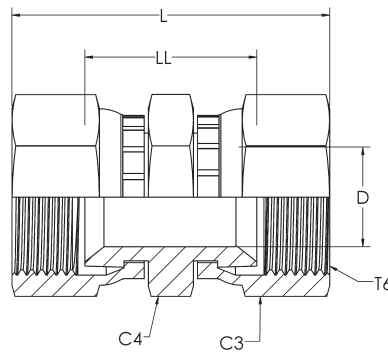

JS-GC

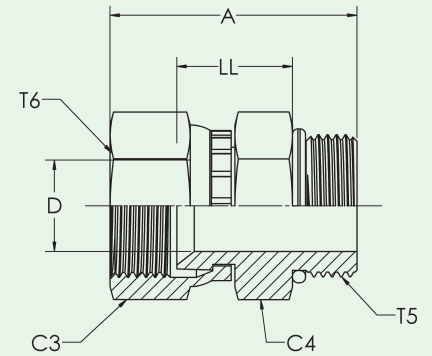

JS-JS

Swivel Nut Union

6565

Part #	Tube O.D.	T6	C3 Hex	C4 Hex	D	L	LL	Dynamic Pressure Rtg.
JS-4-JS	1/4	7/16-20	9/16	9/16	.172	1.48	.80	6000
JS-6-JS	3/8	9/16-18	11/16	11/16	.297	1.75	1.01	6000
JS-8-JS	1/2	3/4-16	7/8	7/8	.391	2.02	1.16	6000
JS-10-JS	5/8	7/8-14	1	1	.484	2.24	1.26	4800
JS-12-JS	3/4	1 1/16-12	1 1/4	1 1/4	.609	2.43	1.31	4200
JS-16-JS	1	1 5/16-12	1 1/2	1 1/2	.844	2.68	1.50	3000

JS-GC


Swivel Straight Thread Connector • Swivel Nut End/Straight Thread O-ring

6402


Part #	Tube O.D.	T5	T6	A	C3 Hex	C4 Hex	D	Dynamic Pressure Rtg.
JS-4-GC	1/4	7/16-20	7/16-20	1.31	9/16	9/16	.172	6000
JS-6-GC	3/8	9/16-18	9/16-18	1.43	11/16	11/16	.297	5400
JS-8-GC	1/2	3/4-16	3/4-16	1.61	7/8	7/8	.391	4800
JS-8-6-GC	1/2	3/8-16	3/4-16	1.54	7/8	13/16	.297	4800
JS-10-GC	5/8	7/8-14	7/8-12	1.84	1	1 1/16	.484	4800
JS-12-GC	3/4	1 1/16-12	1 1/16-12	2.07	1 1/4	1 1/4	.609	4200
JS-16-GC	1	1 5/16-12	1 5/16-12	2.28	1 1/2	1 1/2	.846	3000
JS-20-GC	1 1/4	1 5/8-12	1 5/8-12	2.49	2	2	1.078	3000

*LL - PORT FACE TO BASE OF FLARE SEAT

JS-FC

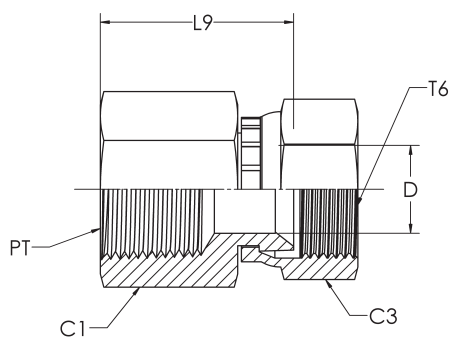

JS-C

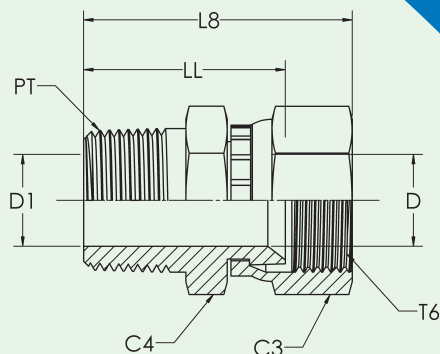

Flared Fittings

TX

JS-FC

Swivel Female Connector • Swivel Nut End/Female Pipe End

Part #	Tube O.D.	T6	PT NPTF	C1 Hex	C3 Hex	D	L9	Dynamic Pressure Rtg.
JS-4-FC	1/4	7/16-20	1/8-27	9/16	9/16	.172	.92	6000
JS-4-4-FC	1/4	7/16-20	1/4-18	3/4	9/16	.172	1.08	6000
JS-6-FC	3/8	9/16-18	1/4-18	3/4	11/16	.297	1.06	6000
JS-6-6-FC	3/8	9/16-18	3/8-18	7/8	11/16	.267	1.16	6000
JS-6-8-FC	3/8	9/16-18	1/2-14	1 1/8	11/16	.297	1.42	6000
JS-8-FC	1/2	3/4-16	3/8-14	7/8	7/8	.391	1.23	6000
JS-8-8-FC	1/2	3/4-16	1/2-14	1 1/8	7/8	.391	1.48	6000
JS-10-FC	5/8	7/8-14	1/2-14	1 1/8	1	.484	1.47	4800
JS-12-FC	3/4	1 1/16-12	3/4-14	1 3/8	1 1/4	.609	1.51	4200
JS-12-8-FC	3/4	1 1/16-12	1/2-14	1 1/4	1 1/4	.609	1.50	4200
JS-16-FC	1	1 5/16-12	1-11 1/2	1 5/8	1 1/2	.844	1.85	3000
JS-20-FC	1 1/4	1 5/8-12	1 1/4	2	2	1.078	2.17	3000
JS-24-FC	1 1/2	1 7/8-12	1 1/2	2 3/8	2 1/4	1.312	2.26	2400
JS-32-FC	2	2 1/2-12	2	2 7/8	2 7/8	1.781	2.45	1800

*L9 - PORT FACE TO BASE OF FLARE SEAT

6506

JS-C

Swivel Connector • Swivel Nut End/Male Pipe End

Part #	Tube OD	T6	PT NPTF	C3 Hex	C4 Hex	D Drill	D1 Drill	L8	LL	Dynamic Pressure Rtg.
JS-4-C	1/4	7/16-20	1/8-27	9/16	9/16	.172	.172	1.13	.63	6000
JS-4-4-C	1/4	7/16-20	1/4-18	9/16	9/16	.172	.172	1.46	.85	6000
JS-5-4-C	5/16	1/2-20	1/4-18	5/8	5/8	.234	.281	1.57	.88	6000
JS-6-C	3/8	9/16-18	1/4-18	11/16	11/16	.297	.297	1.59	.94	5400
JS-6-6-C	3/8	9/16-18	3/8-18	11/16	3/4	.281	.281	1.59	.95	5400
JS-8-C	1/2	3/4-16	3/8-18	7/8	7/8	.391	.391	1.69	.95	4800
JS-8-8-C	1/2	3/4-16	1/2-14	7/8	7/8	.391	.391	1.92	1.07	4800
JS-10-C	5/8	7/8-14	1/2-14	1	1	.484	.484	2.05	1.07	4800
JS-10-6-C	5/8	7/8-14	3/8-18	1	1	.484	.406	1.87	.99	4200
JS-12-C	3/4	1 1/16-12	3/4-14	1 1/8	1 1/4	.609	.609	2.15	1.15	4200
JS-12-8-C	3/4	1 1/16-12	1/2-14	1 1/4	1 1/4	.594	.531	2.15	1.17	3000
JS-16-C	1	1 5/16-12	1-11 1/2	1 1/2	1 1/2	.844	.844	2.50	1.90	3000
JS-16-12-C	1	1 5/16-12	3/4-14	1 1/2	1 1/2	.844	.719	2.33	1.21	3000
JS-20-C	1 1/4	1 5/8-12	1 1/4	2	2	1.078	1.078	2.76	1.47	3000
JS-24-C	1 1/2	1 7/8-12	1 1/2	2 1/4	2 1/4	1.312	1.312	3.05	1.71	2400
JS-32-C	2	2 1/2-12	2	2 7/8	2 5/8	1.781	1.781	3.38	1.98	1800

LL* - PORT FACE TO BASE OF FLARE SEAT


D1* DRILL MAY BE PRESENT DUE TO MANUFACTURING OPTION PER SAE J514

6505



F

Flareless Fittings

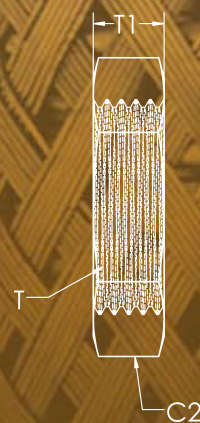

BN


Bulkhead Locknut • Bulkhead Fitting Locknut

306
MS51860
SAE 080118

Part #	Tube O.D.	T	C2 Hex	T1
BN-3	3/16	3/8-24	5/8	.22
BN-4	1/4	7/16-20	11/16	.28
BN-5	5/16	1/2-20	3/4	.28
BN-6	3/8	9/16-18	13/16	.27
BN-8	1/2	3/4-16	1	.31
BN-10	5/8	7/8-14	1 1/8	.36
BN-12	3/4	1 1/16-12	1 3/8	.41
BN-14	7/8	1 3/16-12	1 1/2	.41
BN-16	1	1 5/16-12	1 5/8	.41
BN-20	1 1/4	1 5/8-12	1 7/8	.41
BN-24	1 1/2	1 7/8-12	2 1/8	.41
BN-32	2	2 1/2-12	2 3/4	.41

Call toll free:

800.333.2636

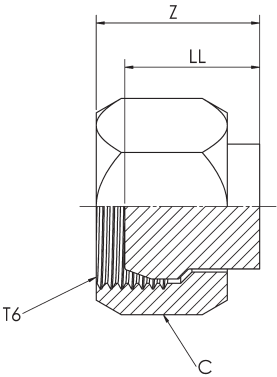


Cap • Flareless Tube Cap

F-Z

Tube Fitting Part #	Tube O.D.	T6	C Hex	LL	Z	Dynamic Pressure Rtg
F-4-Z	1/4	7/16-20	9/16	.36	.73	6000
F-5-Z	5/16	1/2-20	5/8	.40	.77	6000
F-6-Z	3/8	9/16	11/16	.42	.80	6000
F-8-Z	1/2	3/4-16	7/8	.44	.87	5000
F-10-Z	5/8	7/8	1	.47	.98	5000
F-12-Z	3/4	1 1/16-12	1 1/4	.48	1.00	4500
F-16-Z	1	1 5/16-12	1 1/2	.58	1.08	4000

C304-C
MS51890
SAE 080112

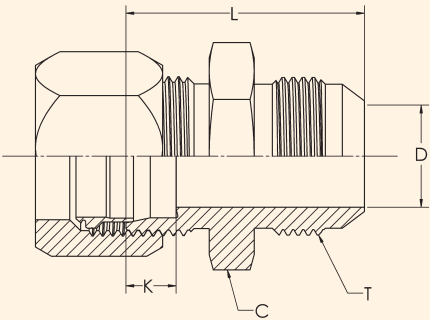


F-TXU

Union Adapter • Flareless Tube End/Male Flare End


C2402
MS51856
SAE 080119

Part #	Tube O.D.	T	C Hex	D Drill	K	L	Dynamic Pressure Rtg
F-4-TXU	1/4	7/16-20	1/2	.172	.234	1.19	5000
F-6-TXU	3/8	9/16-18	5/8	.297	.250	1.28	5000
F-8-TXU	1/2	3/4-16	13/16	.391	.305	1.47	5000
F-10-TXU	5/8	7/8-14	15/16	.484	.350	1.69	5000
F-12-TXU	3/4	1 1/16-12	1 1/8	.609	.350	1.94	4500
F-16-TXU	1	1 5/16-12	1 3/8	.844	.415	1.97	4000

F-U

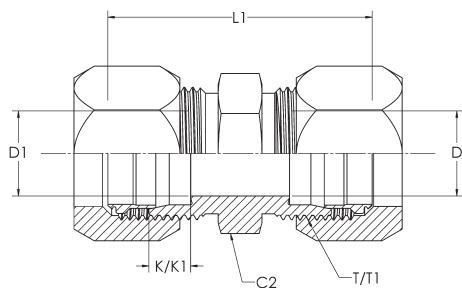

F-LHU

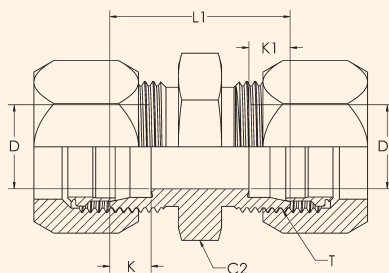

Flareless Fittings

F

F-U

Union Flareless Tube End • Flareless Tube End

Part #	Tube O.D.	T/TI	C Hex	D / D1	K / K1	L1	Dynamic Pressure Rtg
F-2-U	1/8	5/16-24	7/16	.094	.188	1.02	6000
F-3-U	3/16	3/8-24	7/16	.125	.234	1.11	6000
F-4-U	1/4	7/16-20	1/2	.203	.234	1.18	6000
F-5-U	5/16	1/2-20	9/16	.234	.250	1.18	6000
F-6-U	3/8	9/16-18	5/8	.281	.250	1.24	6000
F-8-U	1/2	3/4-16	13/16	.422	.305	1.42	5000
F-10-U	5/8	7/8-14	15/16	.500	.350	1.61	5000
F-12-U	3/4	1 1/16-12	1 1/8	.656	.350	1.81	4500
F-14-U	7/8	1 3/8-12	1 1/4	.718	.350	1.81	4000
F-16-U	1	1 5/8-12	1 3/8	.875	.415	1.81	4000
F-20-U	1 1/4	1 5/8-12	1 11/16	1.093	.415	1.89	3000
F-24-U	1 1/2	1 7/8-12	2	1.344	.485	1.96	2000
F-32-U	2	2 1/2-12	2 5/8	1.812	.485	2.11	1500

C2403
MS51814
SAE 080101

F-LHU

Large Hex Union • Flareless Tube End/Flareless Tube End

Part #	Tube O.D.	T/TI	C2 Hex	D / D1	K / K1	L1	Dynamic Pressure Rtg
F-4-LHU	1/4	7/16-20	11/16	.203	.234	1.18	6000
F-6-LHU	3/8	9/16-18	13/16	.281	.250	1.24	6000
F-8-LHU	1/2	3/4-16	1	.422	.305	1.42	5000
F-10-LHU	5/8	7/8-14	1 1/8	.500	.350	1.61	5000
F-12-LHU	3/4	1 1/16-12	1 3/8	.656	.350	1.81	4500
F-16-LHU	1	1 5/8-12	1 5/8	.875	.415	1.81	4000



C2403-LH
MS51856
SAE 080119

800.333.2636

Omega1.com

F-C

F-FC

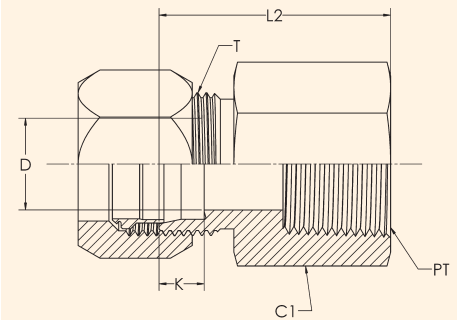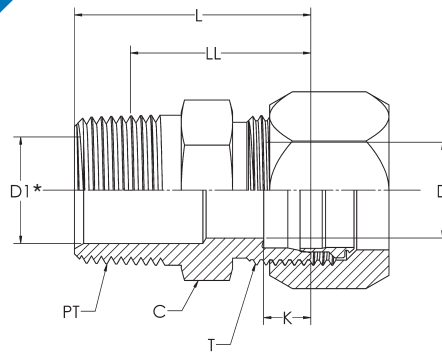

F-C

Male Connector • Flareless Tube End • Male Pipe End

C2404
MS51819
SAE 080102

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	C Hex	D Drill	D1 Drill	K	L	LL After Assy.	Dynamic Pressure Rtg
F-2-4-C	1/8	5/16-24	1/4-18	9/16	.094	.281	.19	1.25	.91	5000
F-3-C	3/16	3/8-24	1/8-27	7/16	.125	.187	.24	1.09	.86	5000
F-4-C	1/4	7/16-20	1/8-27	1/2	.203	.187	.24	1.13	.90	5000
F-4-4-C	1/4	7/16-20	1/4-18	9/16	.203	.281	.24	1.33	.99	5000
F-4-6-C	1/4	7/16-20	3/8-18	3/4	.203	.406	.24	1.33	.98	5000
F-4-8-C	1/4	7/16-20	1/2-14	7/8	.203	.531	.24	1.58	1.12	5000
F-5-C	5/16	1/2-20	1/8-27	9/16	.234	.187	.26	1.13	.90	5000
F-5-4-C	5/16	1/2-20	1/4-18	9/16	.234	.281	.26	1.33	.99	5000
F-6-C	3/8	9/16-18	1/4-18	5/8	.281	.281	.26	1.34	1.00	5000
F-6-2-C	3/8	9/16-18	1/8-27	5/8	.281	.187	.26	1.16	.93	5000
F-6-6-C	3/8	9/16-18	3/8-18	3/4	.281	.406	.26	1.34	.99	5000
F-6-8-C	3/8	9/16-18	1/2-14	7/8	.281	.531	.26	1.60	1.14	5000
F-8-C	1/2	3/4-16	3/8-18	13/16	.422	.406	.31	1.44	1.09	5000
F-8-4-C	1/2	3/4-16	1/4-18	13/16	.422	.281	.31	1.44	1.10	5000
F-8-8-C	1/2	3/4-16	1/2-14	7/8	.422	.531	.31	1.69	1.23	5000
F-8-12-C	1/2	3/4-16	3/4-14	1 1/8	.422	.718	.31	1.75	1.27	4000
F-10-C	5/8	7/8-14	1/2-14	15/16	.500	.531	.36	1.75	1.29	4500
F-10-6-C	5/8	7/8-14	3/8-18	15/16	.500	.406	.36	1.56	1.21	4500
F-10-12-C	5/8	7/8-14	3/4-14	1 1/8	.500	.718	.36	1.83	1.35	4500
F-12-C	3/4	1 1/16-12	3/4-14	1 1/8	.656	.718	.36	1.88	1.40	4000
F-12-8-C	3/4	1 1/16-12	1/2-14	1 1/8	.656	.531	.36	1.88	1.42	4000
F-14-C	7/8	1 3/16-12	3/4-14	1 1/4	.718	.718	.36	1.88	1.40	3000
F-16-C	1	1 5/16-12	1-11 1/2	1 3/8	.875	.937	.42	2.08	1.51	3000
F-16-12-C	1	1 5/16-12	3/4-14	1 3/8	.875	.718	.42	1.88	1.40	3000
F-20-C	1 1/4	1 5/8-12	1 1/4-11 1/2	1 11/16	1.093	1.250	.42	2.19	1.60	2500
F-24-C	1 1/2	1 7/8-12	1 1/2-11 1/2	2	1.344	1.500	.49	2.28	1.69	2500
F-32-C	2	2 1/2-12	2-11 1/2	2 3/4	1.812	1.937	.49	2.47	1.86	2000

*D1 - DRILL MAY BE PRESENT DUE TO MANUFACTURERS OPTION PER SAE J514


F-FC

Female Connector • Flareless Tube End/Female Pipe End


C2405
MS51816
SAE 080103

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	C1 Hex	D Drill	K	L2	Dynamic Pressure Rtg.
F-2-FC	1/8	5/16-24	1/8-27	.9/16	.094	.19	1.05	5000
F-4-FC	1/4	7/16-20	1/8-27	9/16	.203	.24	1.09	5000
F-4-4-FC	1/4	7/16-20	1/4-18	3/4	.203	.24	1.29	5000
F-5-FC	5/16	1/2-20	1/8-27	9/16	.234	.26	1.08	5000
F-6-FC	3/8	9/16-18	1/4-18	3/4	.281	.26	1.31	5000
F-6-6-FC	3/8	9/16-18	3/8-18	7/8	.281	.26	1.34	5000
F-6-8-FC	3/8	9/16-18	1/2-14	1 1/8	.281	.26	1.59	5000
F-8-FC	1/2	3/4-16	3/8-18	7/8	.422	.31	1.47	5000
F-8-4-FC	1/2	3/4-16	1/4-18	7/8	.422	.31	1.46	5000
F-8-8-FC	1/2	3/4-16	1/2-14	1 1/8	.422	.31	1.69	5000
F-10-FC	5/8	7/8-14	1/2-14	1 1/8	.500	.36	1.77	4500
F-12-FC	3/4	1 1/16-12	3/4-14	1 3/8	.656	.36	1.89	4000
F-14-FC	7/8	1 3/16-12	3/4-14	1 3/8	.718	.36	1.86	3000
F-16-FC	1	1 5/16-12	1-11 1/2	1 5/8	.875	.42	2.13	3000
F-20-FC	1 1/4	1 5/8-12	1 1/4-11 1/2	2	1.093	.42	2.22	2500
F-24-FC	1 1/2	1 7/8-12	1 1/2-11 1/2	2 3/8	1.344	.49	2.23	2500

F-TER

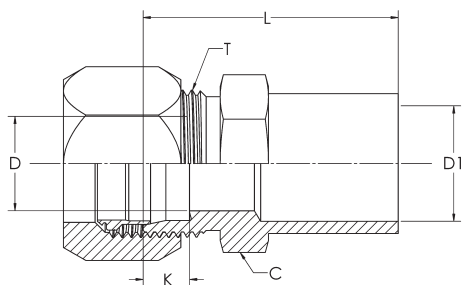

F-P

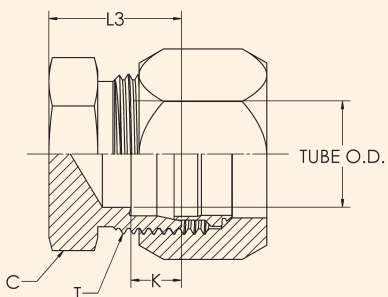

Flareless Fittings

F

F-TER

Tube End Reducer • Flareless Tube End Reducer

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T6 Swivel UN/UNF-2B	C3 Hex	D Drill	D1 Drill	K	L	Q	Dynamic Pressure Rtg
F-6-4-TER	3/8 to 1/4	.375	7/16-20	1/2	.203	.250	.234	1.61	.88	6000
F-8-4-TER	1/2 to 1/4	.500	7/16-20	9/16	.203	.375	.234	1.73	1.00	5000
F-8-6-TER	1/2 to 3/8	.500	9/16-18	5/8	.281	.375	.250	1.77	1.00	5000
F-10-8-TER	5/8 to 1/2	.625	3/4-16	13/16	.422	.500	.305	1.95	1.09	5000
F-12-6-TER	3/4 to 3/8	.750	9/16-18	13/16	.281	.625	.250	1.94	1.16	4500
F-12-8-TER	3/4 to 1/2	.750	3/4-16	13/16	.422	.625	.305	2.03	1.16	4500
F-16-8-TER	1 to 1/2	1.00	3/4-16	1 1/16	.422	.844	.305	2.05	1.13	4000
F-16-12-TER	1 to 3/4	1.00	1 1/16-12	1 1/8	.656	.844	.350	2.25	1.13	4000

C2406
SAE 080123

Plug • Flareless Tube End Plug


Tube Fitting Part #	Tube O.D.	T	C Hex	K	L3	Dynamic Pressure Rtg
F-4-P	1/4	7/16-20	1/2	.234	.72	6000
F-5-P	5/16	1/2-20	9/16	.250	.72	6000
F-6-P	3/8	9/16-18	5/8	.250	.75	6000
F-8-P	1/2	3/4-16	13/16	.305	.84	5000
F-10-P	5/8	7/8-14	15/16	.350	.97	5000
F-12-P	3/4	1 1/16-12	1 1/8	.350	1.09	4500
F-16-P	1	1 5/16-12	1 3/8	.415	1.09	4000

F-P
C2408
MS51891
SAE 080109

800.333.2636

Omega1.com

F-E

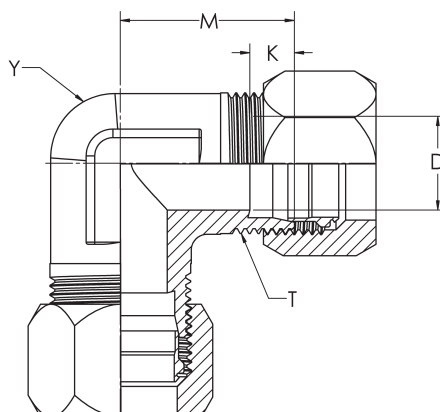

F-E


Union Elbow • Flareless Tube End/Flareless Tube End

C2500

MS51820

SAE 080201

Part #	Tube O.D.	T	D Drill	K	M	Y Across Wrench Flats	Dynamic Pressure Rtg
F-2-E	1/8	5/16-24	.094	.188	.77	7/16	5000
F-4-E	1/4	7/16-20	.203	.234	.89	7/16	5000
F-5-E	5/16	1/2-20	.234	.250	.95	9/16	5000
F-6-E	3/8	9/16-18	.282	.250	1.05	9/16	5000
F-8-E	1/2	3/4-16	.422	.305	1.25	3/4	5000
F-10-E	5/8	7/8	.500	.350	1.42	7/8	4500
F-12-E	3/4	1 1/16-12	.656	.350	1.58	1 1/16	4000
F-14-E	7/8	1 3/16-12	.718	.350	1.66	1 5/16	3000
F-16-E	1	1 5/16-12	.875	.415	1.73	1 5/16	3000
F-20-E	1 1/4	1 5/8-12	1.093	.415	1.89	1 5/8	2500
F-24-E	1 1/2	1 7/8-12	1.344	.485	2.02	1 7/8	2000
F-32-E	2	2 1/2-12	1.813	.485	2.45	2 1/2	1500

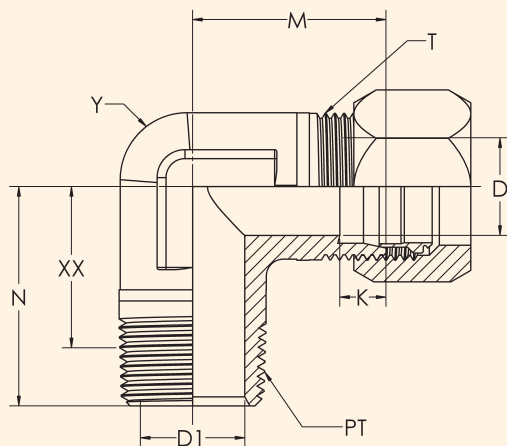

F-ME

Flareless Tube End • Male Pipe End


Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	D Drill	D1 Drill	K	M	N	XX After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
F-2-ME	1/8	5/16-24	1/8-27	.094	.188	.19	.78	.72	.49	7/16	5000
F-3-ME	3/16	3/8-24	1/8-27	.125	.188	.24	.84	.72	.49	7/16	5000
F-4-ME	1/4	7/16-20	1/8-27	.203	.188	.24	.89	.78	.55	7/16	5000
F-4-4-ME	1/4	7/16-20	1/4-18	.203	.281	.24	1.03	1.09	.75	9/16	5000
F-4-6-ME	1/4	7/16-20	3/8-18	.203	.406	.24	1.13	1.22	.87	3/4	5000
F-5-ME	5/16	1/2-20	1/8-27	.234	.188	.26	.95	.81	.58	9/16	5000
F-5-4-ME	5/16	1/2-20	1/4-18	.234	.281	.26	1.03	1.09	.75	9/16	5000
F-6-ME	3/8	9/16-18	1/4-18	.282	.281	.26	1.05	1.09	.75	9/16	5000
F-6-2-ME	3/8	9/16-18	1/8-27	.282	.188	.26	1.05	.88	.65	9/16	5000
F-6-6-ME	3/8	9/16-18	3/8-18	.282	.406	.26	1.14	1.22	.87	3/4	5000
F-6-8-ME	3/8	9/16-18	1/2-14	.282	.531	.26	1.23	1.47	1.01	7/8	5000
F-8-ME	1/2	3/4-16	3/8-18	.422	.406	.31	1.25	1.22	.87	3/4	5000
F-8-4-ME	1/2	3/4-16	1/4-18	.422	.281	.31	1.25	1.16	.82	3/4	5000
F-8-8-ME	1/2	3/4-16	1/2-14	.422	.531	.31	1.34	1.47	1.01	7/8	5000
F-8-12-ME	1/2	3/4-16	3/4-14	.422	.719	.31	1.42	1.59	1.11	1 1/16	4000
F-10-ME	5/8	7/8-14	1/2-14	.500	.531	.36	1.42	1.47	1.01	7/8	4500
F-10-6-ME	5/8	7/8-14	3/8-18	.500	.406	.36	1.42	1.30	.95	7/8	4500
F-12-ME	3/4	1 1/16-12	3/4-14	.656	.719	.36	1.58	1.59	1.11	1 1/16	4000
F-12-8-ME	3/4	1 1/16-12	1/2-14	.656	.531	.36	1.58	1.59	1.13	1 1/16	4000
F-14-ME	7/8	1 3/16-12	3/4-14	.718	.719	.36	1.66	1.69	1.21	1 5/16	3000
F-16-ME	1	1 5/16-12	1-11 1/2	.875	.938	.42	1.73	1.97	1.40	1 5/16	3000
F-16-12-ME	1	1 5/16-12	3/4-14	.875	.719	.42	1.73	1.78	1.30	1 5/16	3000
F-20-ME	1 1/4	1 5/8-12	1 1/4-11 1/2	1.094	1.250	.42	1.89	2.38	1.79	1 5/8	2500
F-24-ME	1 1/2	1 7/8-12	1 1/2-11 1/2	1.344	1.500	.49	2.02	2.64	2.05	1 7/8	2500
F-32-ME	2	2 1/2-12	2-11 1/2	1.813	1.938	.49	2.45	3.00	2.39	2 1/2	2000

C2501
MS51815
SAE 080202


800.333.2636

Omega1.com

F-FE

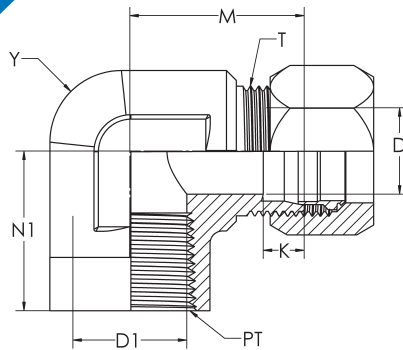

F-ME-45

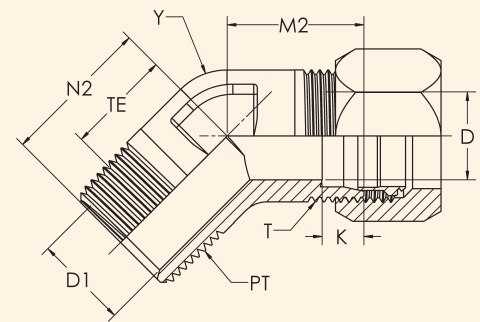

F-FE

Female Elbow • Flareless Tube End/Female Pipe End

C2502

MS51813

SAE 080203

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	D Drill	D1 Drill	K	M	N1	Y Across Wrench Flats	Dynamic Pressure Rtg
F-4-FE	1/4	7/16-20	1/8-27	.203	.328	.24	.89	.66	9/16	5000
F-4-4-FE	1/4	7/16-20	1/4-18	.203	.422	.24	1.03	.88	3/4	5000
F-5-FE	5/16	1/2-20	1/8-27	.234	.328	.26	.95	.66	9/16	5000
F-6-FE	3/8	9/16-18	1/4-18	.282	.422	.26	1.05	.88	3/4	5000
F-6-6-FE	3/8	9/16-18	3/8-18	.282	.563	.26	1.13	1.02	7/8	4500
F-8-FE	1/2	3/4-16	3/8-18	.422	.563	.31	1.23	1.02	7/8	3000
F-8-4-FE	1/2	3/4-16	1/4-18	.422	.422	.31	1.23	.88	3/4	5000
F-8-8-FE	1/2	3/4-16	1/2-14	.422	.688	.31	1.34	1.23	1 1/16	3000
F-10-FE	5/8	7/8-14	1/2-14	.500	.688	.36	1.42	1.23	1 1/16	3000
F-12-FE	3/4	1 1/16-12	3/4-14	.656	.906	.36	1.58	1.36	1 5/16	3000
F-14-FE	7/8	1 3/16-12	3/4-14	.718	.906	.36	1.62	1.42	1 5/16	3000
F-16-FE	1	1 5/16-12	1-11 1/2	.875	1.125	.42	1.73	1.63	1 5/8	1750
F-20-FE	1 1/4	1 5/8-12	1 1/4-11 1/2	1.093	1.469	.42	2.08	1.70	1 7/8	1500
F-24-FE	1 1/2	1 7/8-12	1 1/2-11 1/2	1.344	1.719	.49	2.58	2.08	2 1/2	1000

F-ME-45

45° Male Elbow • Flareless Tube End/Male Pipe End


C2503

MS51817


SAE 080302

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	D Drill	D1 Drill	K	M2	N2	TE After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
F-3-ME-45	3/16	3/8-24	1/8-27	.125	.188	.24	.64	.52	.23	7/16	5000
F-4-ME-45	1/4	7/16-20	1/8-27	.203	.188	.24	.70	.64	.23	7/16	5000
F-4-4-ME-45	1/4	7/16-20	1/4-18	.203	.281	.24	.81	.86	.34	9/16	5000
F-5-ME-45	5/16	1/2-20	1/8-27	.234	.188	.26	.75	.66	.23	9/16	5000
F-6-ME-45	3/8	9/16-18	1/4-18	.282	.281	.26	.83	.86	.34	9/16	5000
F-8-ME-45	1/2	3/4-16	3/8-18	.422	.406	.31	.98	.95	.35	3/4	5000
F-10-ME-45	5/8	7/8-14	1/2-14	.500	.531	.36	1.08	1.17	.46	7/8	4500
F-12-ME-45	3/4	1 1/16-12	3/4-14	.656	.719	.36	1.27	1.20	.48	1 1/16	4000
F-14-ME-45	7/8	1 3/16-12	3/4-14	.718	.719	.36	1.34	1.30	.48	1 5/16	3000
F-16-ME-45	1	1 5/16-12	1-11 1/2	.875	.938	.42	1.36	1.48	.57	1 5/16	3000
F-20-ME-45	1 1/4	1 5/8-12	1 1/4-11 1/2	1.093	1.250	.42	1.45	1.67	.59	1 5/8	2500

F-TTM

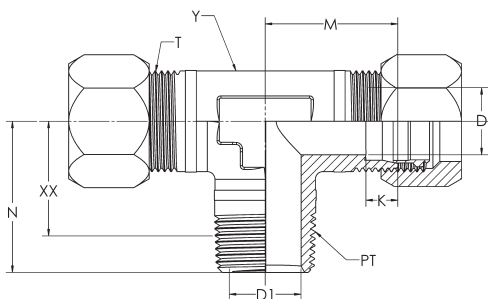

F-TTF

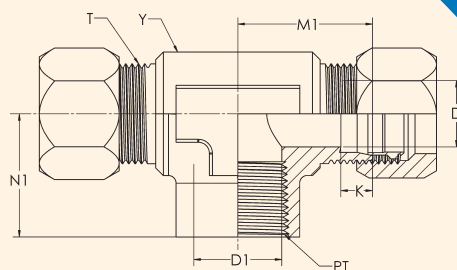

Flareless Fittings

F

F-TTM

Male Branch Tee • Flareless Tube End • Male Pipe End

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	D Drill	D1 Drill	K	M	N	XX After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
F-2-2-2-TTM	1/8	5/16-24	1/8-27	.093	.188	.20	.77	.72	.49	7/16	5000
F-4-4-2-TTM	1/4	7/16-20	1/8-27	.203	.188	.24	.89	.78	.55	7/16	5000
F-4-4-4-TTM	1/4	7/16-20	1/4-18	.203	.281	.24	1.03	1.09	.75	9/16	5000
F-5-TTM	5/16	1/2-20	1/8-27	.234	.188	.26	.95	.81	.58	9/16	5000
F-6-6-4-TTM	3/8	9/16-18	1/4-18	.281	.281	.26	1.05	1.09	.75	9/16	5000
F-8-8-6-TTM	1/2	3/4-16	3/8-18	.422	.406	.31	1.25	1.22	.87	3/4	5000
F-8-8-8-TTM	1/2	3/4-16	1/2-14	.422	.531	.31	1.34	1.47	1.01	7/8	5000
F-10-10-8-TTM	5/8	7/8-14	1/2-14	.500	.531	.36	1.42	1.47	1.01	7/8	4500
F-12-12-12-TTM	3/4	1 1/16-12	3/4-14	.656	.719	.36	1.58	1.59	1.11	1 1/16	4000
F-14-TTM	7/8	1 3/16-12	3/4-14	.718	.719	.36	1.66	1.69	1.18	1 5/16	3000
F-16-16-16-TTM	1	1 5/16-12	1-11 1/2	.875	.938	.42	1.73	1.97	1.40	1 5/16	3000

C2601
MS51818
SAE 080425

F-TTF

Female Branch Tee • Flareless Tube End/Female Pipe End


Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	D Drill	D1 Drill	K	M1	N1	Y Across Wrench Flats	Dynamic Pressure Rtg
F-4-4-2-TTF	1/4	7/16-20	1/8-27	.203	.328	.24	.89	.66	9/16	5000
F-4-4-4-TTF	1/4	7/16-20	1/4-18	.203	.422	.24	1.03	.88	3/4	5000
F-6-6-4-TTF	3/8	9/16-18	1/4-18	.282	.422	.26	1.05	.88	3/4	5000
F-8-8-6-TTF	1/2	3/4-16	3/8-18	.422	.563	.31	1.23	1.02	7/8	3000
F-10-10-8-TTF	5/8	7/8-14	1/2-14	.500	.688	.36	1.42	1.23	1 1/16	3000
F-12-TTF	3/4	1 1/16-12	3/4-14	.656	.906	.36	1.58	1.36	1 5/16	3000
F-14-TTF	7/8	1 3/16-12	3/4-14	.718	.906	.36	1.62	1.42	1 5/16	3000
F-16-TTF	1	1 5/16-12	1-11 1/2	.875	1.125	.42	1.73	1.62	1 5/8	1750
F-20-TTF	1 1/4	1 5/8-12	1 1/4-11 1/2	1.093	1.469	.42	2.08	1.70	1 7/8	1500

C2602
MS51821
SAE 080427


800.333.2636

Omega1.com

F-T

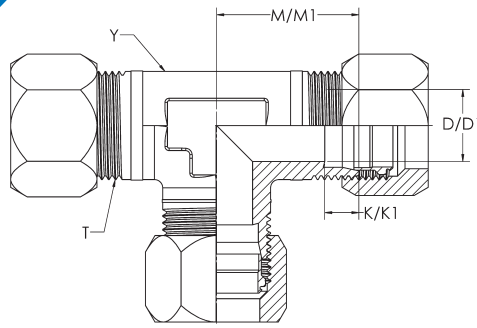

F-TMT

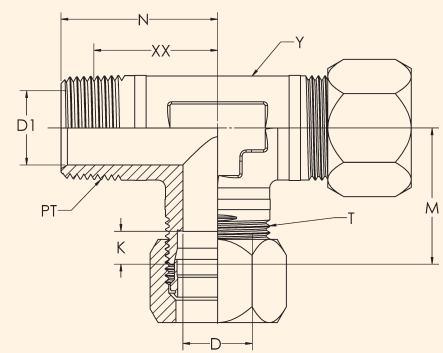

F-T

Union Tee • Flareless Tube End

C2603

MS51811

SAE 080401

Part #	Tube O.D.	T/T1	D/D1	K/K1	M/M1	Y Across Wrench Flats	Dynamic Pressure Rtg
F-4-T	1/4	7/16-20	.203	.234	.89	7/16	5000
F-5-T	5/16	1/2-20	.234	.250	.95	9/16	5000
F-6-T	3/8	9/16-18	.281	.250	1.05	9/16	5000
F-8-T	1/2	3/4-16	.422	.305	1.25	3/4	5000
F-10-T	5/8	7/8-14	.500	.350	1.42	7/8	4500
F-12-T	3/4	1 1/16-12	.656	.350	1.58	1 1/16	4000
F-16-T	1	1 3/16-12	.875	.415	1.73	1 5/16	3000
F-20-T	1 1/4	1 5/8-12	1.093	.415	1.89	1 5/8	2500
F-24-T	1 1/2	1 7/8-12	1.344	.485	2.02	1 7/8	2000

F-TMT

Male Run Tee • Flareless Tube End • Male Pipe End

C2605


MS51824

SAE 080424


Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	D Drill	D1 Drill	K	M	N	XX After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
F-4-2-4-TMT	1/4	7/16-20	1/8-27	.203	.188	.24	.89	.78	.55	7/16	5000
F-4-4-4-TMT	1/4	7/16-20	1/4-18	.203	.281	.24	1.03	1.09	.75	9/16	5000
F-5-TMT	5/16	1/2-20	1/8-27	.234	.188	.26	.95	.81	.58	9/16	5000
F-6-4-6-TMT	3/8	9/16-18	1/4-18	.282	.281	.26	1.05	1.09	.75	9/16	5000
F-8-6-8-TMT	1/2	3/4-16	3/8-18	.422	.406	.31	1.25	1.22	.87	3/4	5000
F-8-8-8-TMT	1/2	3/4-16	1/2-14	.422	.531	.31	1.34	1.47	1.01	7/8	5000
F-10-8-10-TMT	5/8	7/8-14	1/2-14	.500	.531	.36	1.42	1.47	1.01	7/8	4500
F-12-TMT	3/4	1 1/16-12	3/4-14	.656	.719	.36	1.58	1.59	1.11	1 1/16	4000
F-14-TMT	7/8	1 3/16-12	3/4-14	.718	.719	.36	1.62	1.69	1.21	1 5/16	3000
F-16-TMT	1	1 5/16-12	1-11 1/2	.875	.938	.42	1.73	1.97	1.40	1 5/16	3000

*D1 - DRILL MAY BE PRESENT DUE TO MANUFACTURERS OPTION PER SAE J514

F-TFT

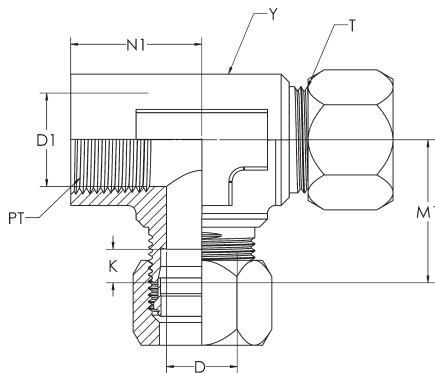

F-BU

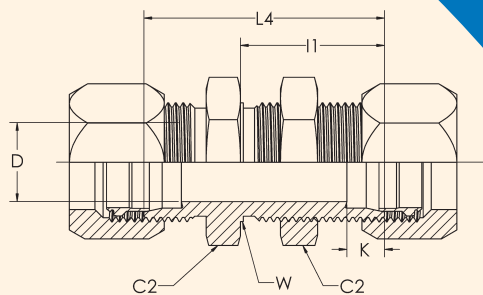

Flareless Fittings

F

Female Run Tee • Flareless Tube End/Female Pipe End


Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD NPTF	D Drill	D1 Drill	K	M1	N1	Y Across Wrench Flats	Dynamic Pressure Rtg
F-4-2-4-TFT	1/4	7/16-20	1/8-27	.203	.328	.24	.89	.66	9/16	5000
F-4-4-4-TFT	1/4	7/16-20	1/4-18	.203	.422	.23	1.45	1.03	3/4	5000
F-6-4-6-TFT	3/8	9/16-18	1/4-18	.282	.422	.26	1.05	.88	3/4	5000
F-6-6-6-TFT	3/8	9/16-18	3/8-18	.282	.563	.25	1.60	1.02	7/8	4500
F-8-6-8-TFT	1/2	3/4-16	3/8-18	.422	.563	.31	1.23	1.02	7/8	3000
F-8-8-8-TFT	1/2	1/2-14	1/2-14	.422	.688	.31	1.84	1.23	1 1/16	3000
F-10-8-10-TFT	5/8	7/8-14	1/2-14	.500	.688	.36	1.42	1.23	1 1/16	3000
F-12-TFT	3/4	1 1/16-12	3/4-14	.656	.906	.36	1.58	1.36	1 5/16	3000
F-16-TFT	1	1 5/16-12	1-11 1/2	.875	1.125	.42	1.73	1.62	1 5/8	1750

C2606
MS51822
SAE 080426

Bulkhead Union • Flareless Tube End/Flareless Tube End

Part #	Tube O.D.	T	C2 Hex	D Drill	I1	K	L4	W	Dynamic Pressure Rtg
F-4-BU	1/4	7/16	11/16	.203	1.12	.234	1.89	.44	6000
F-6-BU	3/8	9/16	13/16	.281	1.17	.250	1.98	.56	6000
F-8-BU	1/2	3/4-16	1	.422	1.31	.305	2.22	.75	5000
F-10-BU	5/8	7/8-14	1 1/8	.500	1.45	.350	2.48	.88	5000
F-12-BU	3/4	1 1/16-12	1 3/8	.656	1.56	.350	2.72	1.06	4500
F-16-BU	1	1 5/16-12	1 5/8	.875	1.56	.415	2.72	1.31	4000

C2700
SAE 080601

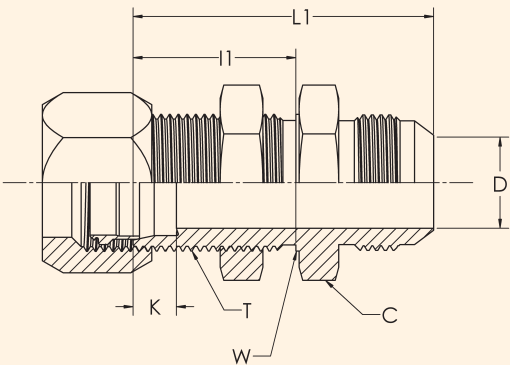


F-TX2U

Bulkhead Union Adapter • Flareless Tube Bulkhead End/Male Flare End

C2707
MS51824
SAE 080424

Part #	Tube O.D.	T	C	D Drill	l1	K	L1	W	Dynamic Pressure Rtg
F-4-TX2U	1/4	7/16-20	11/16	.172	1.12	.234	1.94	.44	5000
F-6-TX2U	3/8	9/16-18	13/16	.297	1.17	.250	2.08	.56	5000
F-8-TX2U	1/2	3/4-16	1	.391	1.31	.305	2.31	.75	5000
F-10-TX2U	5/8	7/8-14	1 1/8	.484	1.45	.350	2.56	.88	5000
F-12-TX2U	3/4	1 1/16-12	1 3/8	.609	1.56	.350	2.94	1.06	4500
F-16-TX2U	1	1 5/16-12	1 3/8	.844	1.56	.415	2.95	1.31	4000

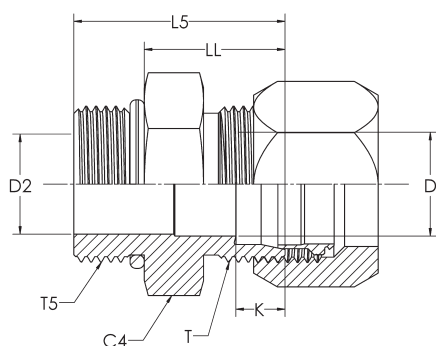


Straight Thread Connector • Flareless Tube End/Straight Thread O-Ring

F-GC

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	T5 Port THD UN/UNF-2A	C4 Hex	D Drill	D2 Drill	K	L5	LL After Assy.	Dynamic Pressure Rtg
F-2-GC	1/8	5/16-24	5/16-24	7/16	.094	.094	.19	1.00	.70	5000
F-3-GC	3/16	3/8-24	3/8-24	1/2	.125	.125	.24	1.05	.75	5000
F-4-GC	1/4	7/16-20	7/16-20	9/16	.203	.203	.24	1.13	.77	5000
F-4-5-GC	1/4	7/16-20	1/2-20	5/8	.203	.234	.24	1.13	.77	5000
F-4-6-GC	1/4	7/16-20	9/16-18	11/16	.203	.281	.24	1.20	.81	5000
F-4-10-GC	1/4	7/16-20	7/8-18	1	.203	.500	.24	1.40	.90	5000
F-5-GC	5/16	1/2-20	1/2-20	5/8	.234	.234	.26	1.13	.77	5000
F-6-GC	3/8	9/16-18	9/16-18	11/16	.281	.281	.26	1.22	.83	5000
F-6-4-GC	3/8	9/16-18	7/16-20	5/8	.281	.203	.26	1.19	.83	5000
F-6-8-GC	3/8	9/16-18	3/4-16	7/8	.281	.422	.26	1.28	.84	5000
F-8-GC	1/2	3/4-16	3/4-16	7/8	.422	.422	.31	1.38	.94	5000
F-8-6-GC	1/2	3/4-16	9/16-18	13/16	.422	.281	.31	1.28	.89	5000
F-8-10-GC	1/2	3/4-16	7/8-14	1	.422	.500	.31	1.50	1.00	5000
F-8-12-GC	1/2	3/4-16	1 1/16-12	1 1/4	.422	.656	.31	1.67	1.08	4500
F-10-GC	5/8	7/8-14	7/8-14	1	.500	.500	.36	1.56	1.06	5000
F-10-12-GC	5/8	7/8-14	1 1/16-12	1 1/4	.500	.500	.36	1.73	1.14	4500
F-12-GC	3/4	1 1/16-12	1 1/16-12	1 1/4	.656	.656	.36	1.78	1.19	4500
F-12-8-GC	3/4	1 1/16-12	3/4-16	1 1/8	.656	.422	.36	1.75	1.19	4500
F-12-16-GC	3/4	1 1/16-12	1 5/16-12	1 1/2	.656	.875	.36	1.81	1.22	4000
F-16-GC	1	1 5/16-12	1 5/16-12	1 1/2	.875	.875	.42	1.81	1.22	4000
F-16-12-GC	1	1 5/16-12	1 1/16-12	1 3/8	.875	.656	.42	1.81	1.22	4000
F-16-20-GC	1	1 5/16-12	1 5/8-12	1 7/8	.875	1.093	.42	1.91	1.31	3000
F-20-GC	1 1/4	1 5/8-12	1 5/8-12	1 7/8	1.093	1.093	.42	1.91	1.31	3000
F-24-GC	1 1/2	1 7/8-12	1 7/8-12	2 1/2	1.344	1.344	.49	1.97	1.37	3000
F-32-GC	2	2 1/2-12	2 1/2-12	2 3/4	1.813	1.813	.49	2.13	1.53	2000

C6400
MS51843
SAE 080120

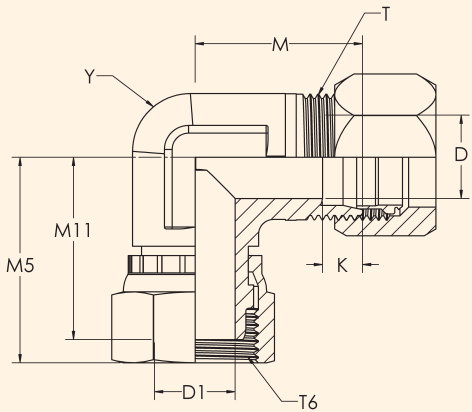


F-SE

Swivel Nut Elbow • Flareless Tube End/Swivel Nut End


C6500
MS51852
SAE 080221

Tube Fitting Part #	Tube O.D.	T/T6	D/D1	K	M	M5	M11	Y Across Wrench Flats	Dynamic Pressure Rtg
F-4-SE	1/4	7/16-20	.203	.234	.89	1.05	.75	7/16	5000
F-6-SE	3/8	9/16-18	.282	.250	1.05	1.28	.94	9/16	5000
F-8-SE	1/2	3/4-16	.422	.305	1.25	1.47	1.07	3/4	5000
F-10-SE	5/8	7/8-14	.500	.350	1.42	1.61	1.20	7/8	4500
F-12-SE	3/4	1 1/16-12	.656	.350	1.58	1.77	1.29	1 1/16	4000
F-16-SE	1	1 5/16-12	.875	.415	1.73	1.86	1.43	1 5/16	3000

F-SRT

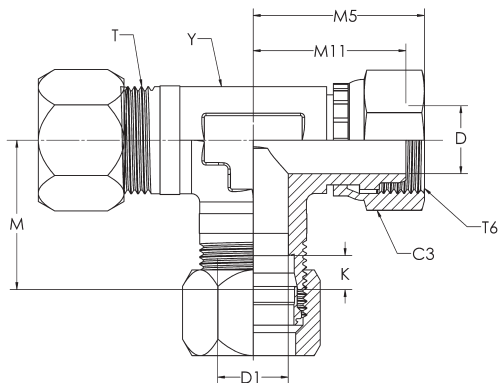

F-GE

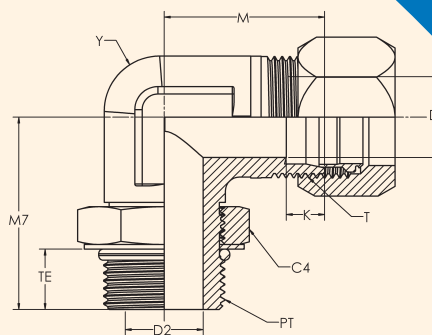

Flareless Fittings

F

F-SRT

Swivel Nut Run Tee • Flareless Tube End/Swivel Nut End

Tube Fitting Part #	Tube O.D.	T/T6	C3 Hex	D/D1	K	M	M5	M11	Y Across Wrench Flats	Dynamic Pressure Rtg
F-4-SRT	1/4	7/16-20	9/16	.203	.234	.89	1.05	.75	7/16	5000
F-6-SRT	3/8	9/16-18	11/16	.282	.250	1.05	1.28	.94	9/16	5000
F-8-SRT	1/2	3/4-16	7/8	.422	.305	1.25	1.47	1.07	3/4	5000
F-12-SRT	3/4	1 1/16-12	1 1/4	.656	.350	1.58	1.77	1.29	1 1/16	4000
F-16-SRT	1	1 5/16-12	1 1/2	.875	.415	1.73	1.86	1.43	1 5/16	3000

C6602
MS51854
SAE 080432

F-GE

Straight Thread Elbow • Flareless Tube End/Straight Thread O-Ring

Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD	C4 Hex	D Drill	D2 Drill	K	M	M7	TE After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
F-3-GE	3/16	3/8-24	3/8-24	1/2	.125	.125	.24	.84	.94	.64	7/16	5000
F-4-GE	1/4	7/16-20	7/16-20	9/16	.203	.203	.24	.89	1.03	.67	7/16	5000
F-5-GE	5/16	1/2-20	1/2-20	5/8	.234	.234	.26	.95	1.13	.77	9/16	5000
F-6-GE	3/8	9/16-18	9/16-18	11/16	.282	.282	.26	1.05	1.25	.86	9/16	5000
F-6-8-GE	3/8	9/16-18	3/4-16	7/8	.282	.422	.26	1.14	1.45	1.01	3/4	5000
F-8-GE	1/2	3/4-16	3/4-16	7/8	.422	.422	.31	1.25	1.45	1.01	3/4	5000
F-8-6-GE	1/2	3/4-16	9/16-18	11/16	.422	.282	.31	1.27	1.33	.94	3/4	5000
F-8-10-GE	1/2	3/4-16	7/8-14	1	.422	.500	.31	1.34	1.70	1.20	7/8	4500
F-8-12-GE	1/2	3/4-16	1 1/16-12	1 1/4	.422	.656	.31	1.43	1.94	1.35	1 1/16	4000
F-10-GE	5/8	7/8-14	7/8-14	1	.500	.500	.36	1.42	1.70	1.20	7/8	4500
F-12-GE	3/4	1 1/16-12	1 1/16-12	1 1/4	.656	.656	.36	1.58	1.94	1.35	1 1/16	4000
F-12-8-GE	3/4	1 1/16-12	3/4-16	7/8	.656	.422	.36	1.58	1.63	1.19	1 1/16	4500
F-12-10-GE	3/4	1 1/16-12	7/8-14	1	.656	.500	.36	1.58	1.78	1.28	1 1/16	4000
F-12-16-GE	3/4	1 1/16-12	1 5/16-12	1 1/2	.656	.875	.36	1.73	2.05	1.46	1 5/16	3000
F-16-GE	1	1 5/16-12	1 5/16-12	1 1/2	.875	.875	.42	1.73	2.05	1.46	1 5/16	3000
F-16-12-GE	1	1 5/16-12	1 1/16-12	1 1/4	.875	.656	.42	1.73	2.05	1.46	1 5/16	3000
F-20-GE	1 1/4	1 5/8-12	1 5/8-12	1 7/8	1.093	1.093	.42	1.89	2.25	1.66	1 5/8	2500
F-24-GE	1 1/2	1 7/8-12	1 7/8-12	2 1/8	1.344	1.344	.49	2.02	2.39	1.80	1 7/8	2000
F-32-GE	2	2 1/2-12	2 1/2-12	2 3/4	1.813	1.813	.49	2.45	2.89	2.23	2 1/2	1500



C6801
MS51839
SAE 080320

800.333.2636

Omega1.com

F-GE-45

F-GBT

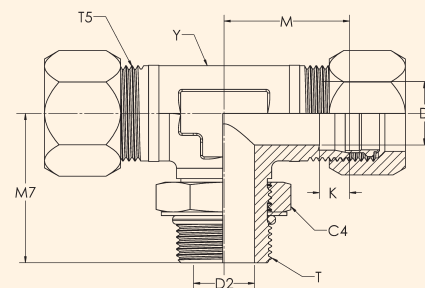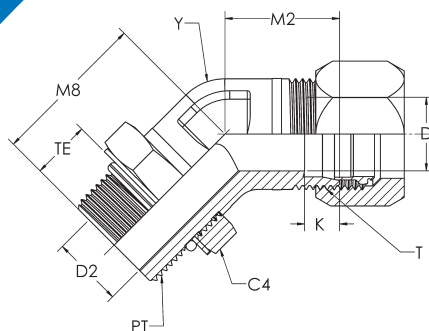

F-GE-45

Straight Thread Elbow-45 • Flareless Tube End/Straight Thread O-Ring

C6802-45
MS51842
SAE 080320


Tube Fitting Part #	Tube O.D.	T Tube End UN/UNF-2A	PT Port THD	C4 Hex	D Drill	D2 Drill	K	M2	M8	TE After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
F-4-GE-45	1/4	7/16-20	7/16-20	9/16	.203	.203	.24	.70	1.05	.36	7/16	5000
F-6-GE-45	3/8	9/16-18	9/16-18	11/16	.282	.282	.26	.83	1.14	.39	9/16	5000
F-8-GE-45	1/2	3/4-16	3/4-16	7/8	.422	.422	.31	.98	1.30	.44	3/4	5000
F-12-GE-45	3/4	1 1/16-12	1 1/16-12	1 1/4	.656	.656	.36	1.27	1.73	.59	1 1/16	4000
F-16-GE-45	1	1 5/16-12	1 5/16-12	1 1/2	.875	.875	.42	1.36	1.86	.59	1 5/16	3000

F-GBT

Straight Thread Branch Tee • Flareless Tube Ends/Straight Thread O-Ring

C6803-NW0
MS51841
SAE 080429

Tube Fitting Part #	Tube O.D.	T/T5	C4 Hex	D/D2	K	M	M7	Y Across Wrench Flats	Dynamic Pressure Rtg
F-4-GBT	1/4	7/16-20	9/16	.203	.234	.89	1.03	7/16	5000
F-6-GBT	3/8	9/16-18	11/16	.282	.250	1.05	1.25	9/16	5000
F-8-GBT	1/2	3/4-16	7/8	.422	.250	1.25	1.45	3/4	5000
F-10-GBT	5/8	7/8-14	1	.500	.350	1.42	1.70	7/8	4500
F-12-GBT	3/4	1 1/16-12	1 1/4	.656	.350	1.58	1.94	1 1/16	4000
F-16-GBT	1	1 5/16-12	1 1/2	.875	.415	1.73	2.05	1 5/16	3000

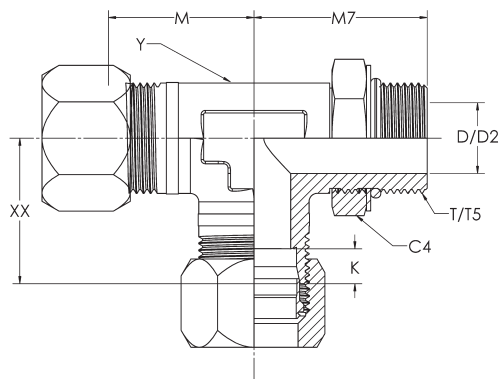

Straight Thread Run Tee • Flareless Tube End/Straight Thread O-Ring

F-GRT

Tube Fitting Part #	Tube O.D.	T/T5	C4 Hex	D/D2	K	M	M7	XX	Y Across Wrench Flats	Dynamic Pressure Rtg
F-4-GRT	1/4	7/16-20	9/16	.203	.234	.89	1.03	.67	7/16	5000
F-6-GRT	3/8	9/16-18	11/16	.282	.250	1.05	1.25	.86	9/16	5000
F-8-GRT	1/2	3/4-16	7/8	.422	.305	1.25	1.45	1.01	3/4	5000
F-10-GRT	5/8	7/8-14	1	.500	.350	1.42	1.70	1.20	7/8	4500
F-12-GRT	3/4	1 1/16-12	1 1/4	.656	.350	1.58	1.94	1.35	1 1/16	4000
F-16-GRT	1	1 5/16-12	1 1/2	.875	.415	1.72	2.05	1.46	1 5/16	3000

C6804-NOW
MS51892
SAE 080428




P Threaded Fittings




Call toll free:

800.333.2636

207ACBH

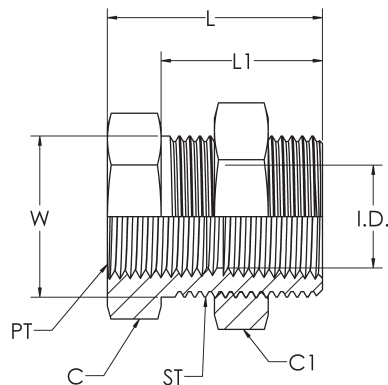

P-GCU

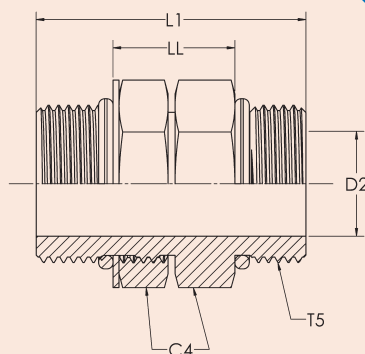

Pipe Fittings

P

207ACBH

Anchor Coupling

Part #	PT	ST	C	C1	L	L1	W*	ID Flow
207ACBH-4S	1/4	3/4-16	1	1	.94	.69	.75	.421
207ACBH-4	1/4	3/4-16	1	1	1.50	1.25	.75	.421
207ACBH-6	3/8	1-14	1 1/8	1 1/4	1.31	1.13	1.00	.570
207ACBH-8	1/2	1 1/8-14	1 1/4	1 3/8	1.50	1.25	1.13	.687
207ACBH-12	3/4	1 5/16-12	1 1/2	1 5/8	1.50	.990	1.31	.906

W* – BULKHEAD PILOT DIAMETER RECOMMENDED CLEARANCE HOLE $\pm .015$ " OVER W* DIAMETER

P-GCU

P-GCU Straight Thread Union • Straight Thread O-Ring/Adjustable Straight Thread


Tube Fitting Part #	T5 Port THD UN/UNF-2A	C4 Hex	D2 Drill	L1	LL After Assy.	Dynamic Pressure Rating
P-4-GCU	7/16-20	9/16	.203	1.22	.47	6000
P-6-GCU	9/16-18	11/16	.297	1.41	.59	6000
P-8-GCU	3/4-16	7/8	.422	1.56	.63	6000
P-10-GCU	7/8-14	1	.484	1.81	.75	5400
P-12-GCU	1 1/16-12	1 1/4	.656	2.13	.89	4800
P-16-GCU	1 5/16-12	1 1/2	.875	2.13	.89	3600
P-20-GCU	1 5/8-12	1 7/8	1.078	2.13	.89	3000
P-24-GCU	1 7/8-12	2 1/8	1.344	2.13	.89	2400
P-32-GCU	2 1/2-12	2 3/4	1.813	2.13	.89	1800

3474


800.333.2636

Omega1.com

P-HC

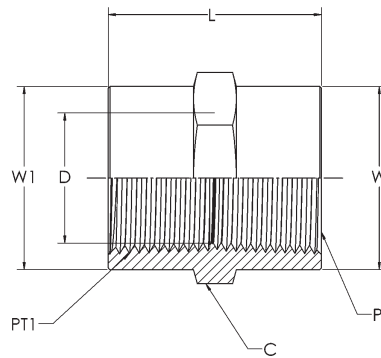

P-HN

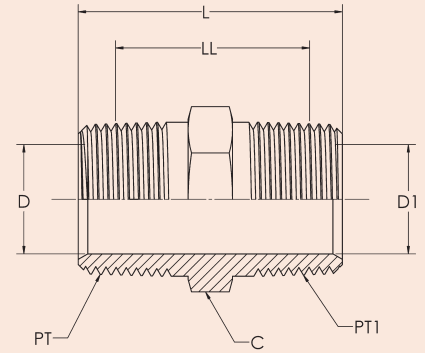

P-HC

Hex Pipe Coupling • Female Pipe Thread/Female Pipe Thread

5000
SAE 140138


Tube Fitting Part #	PT Port Thread NPTF	PT1 Port THD NPTF	C Hex	Ref D Drill	L	W	W1	Dynamic Pressure Rtg
P-1/8-HC	1/8-27	1/8-27	5/8	.328	.75	.63	.63	7200
P-1/4 X 1/8-HC	1/4-18	1/8-27	3/4	.328	.94	.75	.63	7200
P-1/4-HC	1/4-18	1/4-18	3/4	.422	1.13	.75	.75	7200
P-3/8 X 1/8-HC	3/8-18	1/8-27	7/8	.328	1.03	.88	.63	7200
P-3/8 X 1/4-HC	3/8-18	1/4-18	7/8	.422	1.13	.88	.75	7200
P-3/8-HC	3/8-18	3/8-18	7/8	.563	1.13	.88	.88	7200
P-1/2 X 1/8-HC	1/2-14	1/8-27	1 1/8	.328	1.06	1.13	.63	6000
P-1/2 X 3/8-HC	1/2-14	1/4-18	1 1/8	.422	1.38	1.13	.75	6000
P-1/2 X 1/4-HC	1/2-14	3/8-18	1 1/8	.563	1.50	1.13	.88	6000
P-1/2-HC	1/2-14	1/2-14	1 1/8	.688	1.50	1.13	1.13	6000
P-3/4 X 1/4-HC	3/4-14	1/4-18	1 3/8	.422	1.55	1.36	.75	4800
P-3/4 X 1/2-HC	3/4-14	1/2-14	1 3/8	.688	1.88	1.36	1.13	4800
P-3/4-HC	3/4-14	3/4-14	1 3/8	.891	1.53	1.38	1.38	4800
P-1-HC	1-11 1/2	1-11 1/2	1 5/8	1.125	1.89	1.63	1.63	3600
P-1 X 1/2-HC	1-11 1/2	1/2-14	1 5/8	.688	1.77	1.63	1.13	3600
P-1 X 3/4-HC	1-11 1/2	3/4-14	1 5/8	.891	1.77	1.63	1.38	3600
P-1 1/4-HC	1 1/4-11 1/2	1 1/4-11 1/2	2	1.469	1.93	2.00	2.00	3000
P-1 1/4 X 1-HC	1 1/4-11 1/2	1-11 1/2	2	1.125	1.93	2.00	1/63	3000
P-1 1/2-HC	1 1/2-11 1/2	1 1/2-11 1/2	2 3/8	1.703	1.94	2.38	2.38	2400
P-1 1/2 X 1 1/4-HC	1 1/2-11 1/2	1 1/4-11 1/2	2 3/8	1.469	1.93	2.37	2.37	2400
P-2-HC	2-11 1/2	2-11 1/2	2 7/8	2.188	1.96	2.88	2.88	2400

P-HN

Hex Nipple X Hollow Hex Plug • Male Pipe Thread

5404
SAE 140137

Tube Fitting Part #	PT Port Thread NPTF	PT1 Port THD NPTF	C Hex	D Drill	D1 Drill	L	LL After Assy.	Dynamic Pressure Rtg
P-1/8-HN	1/8-27	1/8-27	7/16	.188	.188	1.06	.59	7200
P-1/4 X 1/8-HN	1/4-18	1/8-27	5/8	.281	.188	1.25	.68	7200
P-1/4-HN	1/4-18	1/4-18	5/8	.281	.281	1.45	.77	7200
P-3/8 X 1/8-HN	3/8-18	1/8-27	3/4	.406	.188	1.45	.87	7200
P-3/8 X 1/4-HN	3/8-18	1/4-18	3/4	.406	.281	1.45	.76	7200
P-3/8-HN	3/8-18	3/8-18	3/4	.406	.406	1.45	.75	7200
P-1/2 X 1/8-HN	1/2-14	3/8-14	7/8	.406	.188	1.45	.87	7200
P-1/2 X 3/8-HN	1/2-14	3/8-18	7/8	.531	.406	1.70	.89	7200
P-1/2 X 1/4-HN	1/2-14	1/4-18	7/8	.531	.281	1.70	.90	7200
P-1/2-HN	1/2-14	1/2-14	7/8	.531	.531	1.89	.96	7200
P-3/4 X 1/4-HN	3/4-14	1/4-18	1 1/8	.719	.281	1.78	.96	7200
P-3/4 X 3/8-HN	3/4-14	3/8-14	1 1/8	.719	.406	1.78	.95	7200
P-3/4 X 1/2-HN	3/4-14	1/2-14	1 1/8	.719	.531	1.96	.84	7200
P-3/4-HN	3/4-14	3/4-14	1 1/8	.719	.719	1.96	.70	7200
P-1-HN	1-11 1/2	1-11 1/2	1 3/8	.938	.938	2.34	1.19	7200
P-1 X 1/4-HN	1-11 1/2	1/4-14	1 3/8	.938	.281	1.96	1.05	7200
P-1 X 3/8-HN	1-11 1/2	3/8-14	1 3/8	.938	.406	1.96	1.04	7200
P-1 X 1/2-HN	1-11 1/2	1/2-14	1 3/8	.938	.531	2.09	1.06	7200
P-1 X 3/4-HN	1-11 1/2	3/4-14	1 3/8	.719	.719	2.09	1.04	7200
P-1 1/4 X 1-HN	1 1/4-11 1/2	1-11 1/2	1 3/4	1.250	.938	2.45	1.28	6000
P-1 1/4-HN	1 1/4-11 1/2	1 1/4-11 1/2	1 3/4	1.250	1.250	2.48	1.29	6000
P-1 1/2-HN	1 1/2-11 1/2	1 1/2-11 1/2	2	1.500	1.500	2.61	1.42	3600
P-1 1/2 X 1-HN	1 1/2-11 1/2	1-11 1/2	2	1.500	.938	2.55	1.38	3600
P-2-HN	2-11 1/2	2-11 1/2	2 1/2	1.938	1.938	2.83	1.61	3000
P-2 X 1 1/2-HN	2-11 1/2	1 1/2-11 1/2	2 1/2	1.500	1.500	2.79	1.58	3000

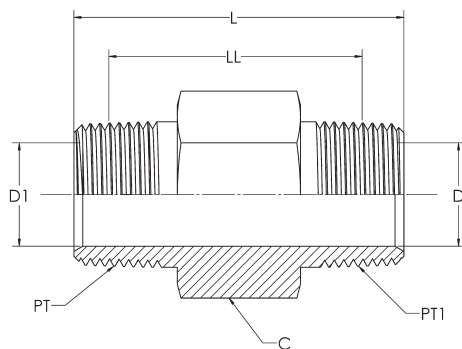

P-LHN


Long Pipe Nipple • Male Pipe Thread/Male Pipe Thread

Tube Fitting Part #	PT Port Thread NPTF	C Hex	D Drill	L	LL After Assy.	Dynamic Pressure Rating
P-1/8-LHN X 1.5	1/8-27	7/16	.188	1.50	1.03	7200
P-1/8-LHN X 2.0	1/8-27	7/16	.188	2.00	1.53	7200
P-1/8-LHN X 2.5	1/8-27	7/16	.188	2.50	2.03	7200
P-1/8-LHN X 3.0	1/8-27	7/16	.188	3.00	2.53	7200
P-1/4-LHN X 1.5	1/4-18	5/8	.281	1.50	.82	7200
P-1/4-LHN X 2.0	1/4-18	5/8	.281	2.00	1.32	7200
P-1/4-LHN X 2.5	1/4-18	5/8	.281	2.50	1.82	7200
P-1/4-LHN X 3.0	1/4-18	5/8	.281	3.00	2.32	7200
P-1/4-LHN X 4.0	1/4-18	5/8	.281	4.00	3.32	7200
P-3/8-LHN X 2.0	3/8-18	3/4	.406	2.00	1.30	7200
P-3/8-LHN X 3.0	3/8-18	3/4	.406	3.00	2.30	7200
P-3/8-LHN X 3.5	3/8-18	3/4	.406	3.50	2.80	7200
P-3/8-LHN X 4.0	3/8-18	3/4	.406	4.00	3.30	7200
P-1/2-LHN X 2.0	1/2-14	7/8	.531	2.00	1.07	7200
P-1/2-LHN X 2.5	1/2-14	7/8	.531	2.50	1.57	7200
P-1/2-LHN X 3.0	1/2-14	7/8	.531	3.00	2.07	7200
P-1/2-LHN X 4.0	1/2-14	7/8	.531	4.00	3.07	7200
P-1/2-LHN X 6.0	1/2-14	7/8	.531	6.00	5.07	7200
P-3/4-LHN X 3.00	3/4-14	1 1/8	.719	3.00	2.04	7200
P-1-LHN X 3.00	1-11 1/2	1 3/8	.938	3.00	1.86	7200


800.333.2636

Omega1.com

P-RA

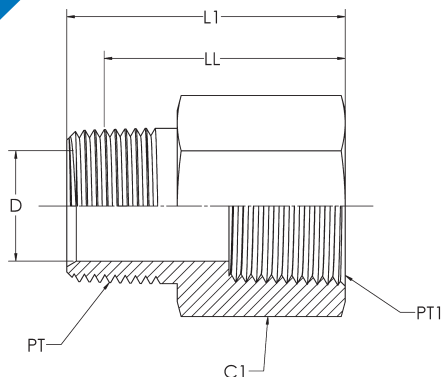

P-HP

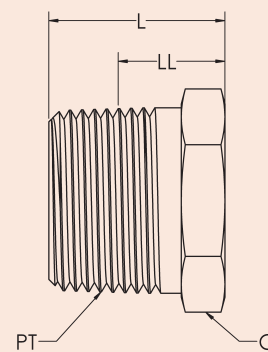

P-RA

Reducing Adapter • Female Pipe Thread/Male Pipe Thread

5405
SAE 140139

Tube Fitting Part #	PT Port Thread NPTF	PT1 Port THD NPTF	C1 Hex	D Drill	L1	LL	Dynamic Pressure Rtg
P-1/8-RA	1/8-27	1/8-27	5/8	.188	1.03	.80	7200
P-1/4 X 1/8-RA	1/8-27	1/4-18	3/4	.188	1.20	.97	7200
P-1/4-RA	1/4-18	1/4-18	3/4	.281	1.39	1.05	7200
P-3/8 X 1/8-RA	1/8-27	3/8-18	7/8	.188	1.25	1.02	7200
P-3/8 X 1/4-RA	1/4-18	3/8-18	7/8	.281	1.44	1.10	7200
P-3/8-RA	3/8-18	3/8-18	7/8	.406	1.44	1.09	7200
P-1/2 X 1/8-RA	1/8-27	1/2-14	1 1/8	.188	1.50	1.27	6000
P-1/2 X 1/4-RA	1/4-18	1/2-14	1 1/8	.281	1.69	1.35	6000
P-1/2 X 3/8-RA	3/8-18	1/2-14	1 1/8	.406	1.69	1.34	6000
P-1/2-RA	1/2-14	1/2-14	1 1/8	.531	1.69	1.23	6000
P-3/4 X 1/4-RA	1/4-18	3/4-14	1 3/8	.281	1.75	1.41	4800
P-3/4 X 3/8-RA	3/8-18	3/4-14	1 3/8	.406	1.75	1.40	4800
P-3/4 X 1/2-RA	1/2-14	3/4-14	1 3/8	.531	1.94	1.48	4800
P-1-RA	1-11 1/2	1-11 1/2	1 5/8	.938	2.37	1.80	3600
P-1 X 1/4-RA	1/4-18	1-11 1/2	1 5/8	.281	2.01	1.67	3600
P-1 X 1/2-RA	1/2-14	1-11 1/2	1 5/8	.531	2.19	1.73	3600
P-1 X 3/4-RA	3/4-14	1-11 1/2	1 5/8	.719	2.19	1.71	3600
P-1 1/4-RA	1 1/4-11 1/2	1 1/4-11 1/2	2	1.250	2.50	1.91	3000
P-1 1/4 X 1-RA	1-11 1/2	1 1/4-11 1/2	2	.938	2.47	1.90	3000
P-1 1/2 X 1-RA	1-11 1/2	1 1/2-11 1/2	2 3/8	0.938	2.47	1.90	2400
P-2-RA	2-11 1/2	2-11 1/2	2 7/8	1.938	2.66	2.06	2400


P-HP

Hex Head Plug • Male Pipe Thread


5406-P
SAE 130109E

Tube Fitting Part #	PT Port THD NPTF	C Hex	L	LL	Dynamic Pressure Rating
P-1/8-HP	1/8-27	7/16	.560	.330	7200
P-1/4-HP	1/4-18	9/16	.750	.410	7200
P-3/8-HP	3/8-18	11/16	.780	.430	7200
P-1/2-HP	1/2-14	7/8	.970	.510	7200
P-3/4-HP	3/4-14	1 1/16	1.060	.580	7200
P-1-HP	1-11 1/2	1 3/8	1.250	.680	7200
P-1 1/4-HP	1 1/4-11 1/2	1 3/4	1.410	.410	6000
P-1 1/2-HP	1 1/2-11 1/2	2	1.500	.860	3600
P-2-HP	2-11 1/2	2 1/2	1.690	1.080	3000

P-PTR

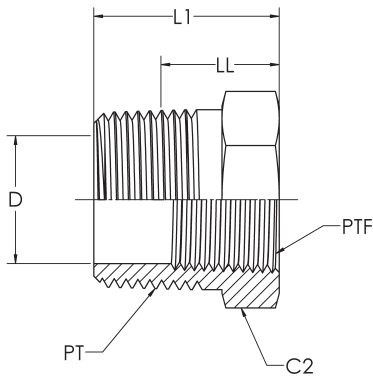

P-CP

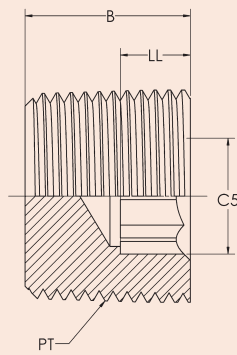

Pipe Fittings

P

P-PTR

Pipe Thread Reducer • Male Pipe Thread/Female Pipe Thread

Tube Fitting Part #	PT Port Thread NPTF	PTF Port THD NPTF	C2 Hex	Ref D Drill	L1	LL	Dynamic Pressure Rtg
P-1/4 X 1/8-PTR	1/4-18	1/8-27	5/8	.328	.86	.52	7200
P-3/8 X 1/8-PTR	3/8-18	1/8-27	3/4	.328	.86	.51	7200
P-3/8 X 1/4-PTR	3/8-18	1/4-18	3/4	.422	.86	.51	7200
P-1/2 X 1/8-PTR	1/2-14	1/8-27	7/8	.328	1.11	.65	6000
P-1/2 X 1/4-PTR	1/2-14	1/4-18	7/8	.422	1.11	.65	6000
P-1/2 X 3/8-PTR	1/2-14	3/8-18	7/8	.563	1.11	.65	6000
P-3/4 X 1/8-PTR	3/4-14	1/8-27	1 1/8	.328	1.17	.69	4800
P-3/4 X 1/4-PTR	3/4-14	1/4-18	1 1/8	.422	1.17	.69	4800
P-3/4 X 3/8-PTR	3/4-14	3/8-18	1 1/8	.563	1.17	.69	4800
P-3/4 X 1/2-PTR	3/4-14	1/2-14	1 1/8	.688	1.17	.69	4800
P-1 X 1/8-PTR	1-11 1/2	1/8-27	1 3/8	.328	1.36	.79	4800
P-1 X 3/8-PTR	1-11 1/2	3/8-18	1 3/8	.563	1.36	.79	3600
P-1 X 1/2-PTR	1-11 1/2	1/2-14	1 3/8	.688	1.36	.79	3600
P-1 X 3/4-PTR	1-11 1/2	3/4-14	1 3/8	.891	1.36	.79	3600
P-1 1/4 X 1/4-PTR	1 1/4-11 1/2	1/4-18	1 3/4	.328	1.47	.53	3600
P-1 1/4 X 3/8-PTR	1 1/4-11 1/2	3/8-18	1 3/4	.563	1.47	.87	3000
P-1 1/4 X 1/2-PTR	1 1/4-11 1/2	1/2-14	1 3/4	.688	1.47	.87	3000
P-1 1/4 X 3/4-PTR	1 1/4-11 1/2	3/4-14	1 3/4	.891	1.47	.88	3000
P-1 1/4 X 1-PTR	1 1/4-11 1/2	1-11 1/2	1 3/4	1.125	1.47	.88	3000
P-1 1/2 X 1/4-PTR	1 1/2-11 1/2	1/4-18	2	.328	1.52	.92	2400
P-1 1/2 X 3/8-PTR	1 1/2-11 1/2	3/8-18	2	.563	1.58	.98	2400
P-1 1/2 X 3/4-PTR	1 1/2-11 1/2	3/4-14	2	.891	1.58	.98	2400
P-1 1/2 X 1-PTR	1 1/2-11 1/2	1-11 1/2	2	1.125	1.58	.99	2400
P-1 1/2 X 1 1/4-PTR	1 1/2-11 1/2	1 1/4-11 1/2	2	1.469	1.58	.99	2400
P-2 X 1/2-PTR	2-11 1/2	1/2-14	2 1/2	.688	1.75	1.14	2400
P-2 X 3/4-PTR	2-11 1/2	3/4-14	2 1/2	.891	1.75	1.14	2400
P-2 X 1-PTR	2-11 1/2	1-11 1/2	2 1/2	1.125	1.75	1.14	2400
P-2 X 1 1/4-PTR	2-11 1/2	1 1/4-11 1/2	2 1/2	1.469	1.75	1.14	2400
P-2 X 1 1/2-PTR	2-11 1/2	1 1/2-11 1/2	2 1/2	1.719	1.75	1.14	2400

5406
SAE 140140

Hollow Hex Plug • Male Pipe Thread

Tube Fitting Part #	PT Port THD NPTF	C5 Internal Hex	B	LL	Dynamic Pressure Rating
P-1/8-CP	1/8-27	3/16	.300	.070	7200
P-1/4-CP	1/4-18	1/4	.460	.120	7200
P-3/8-CP	3/8-18	5/16	.460	.110	7200
P-1/2-CP	1/2-14	3/8	.610	.150	7200
P-3/4-CP	3/4-14	9/16	.620	.140	7200
P-1-CP	1-11 1/2	1 3/8	.770	.190	7200

C5 - ACROSS INTERNAL HEX FLATS


P-CP

5406-HP
SAE 130109N


800.333.2636

Omega1.com

P-MM

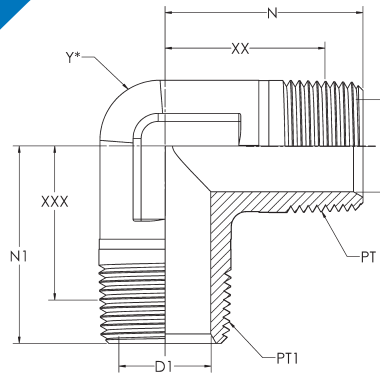

P-MF

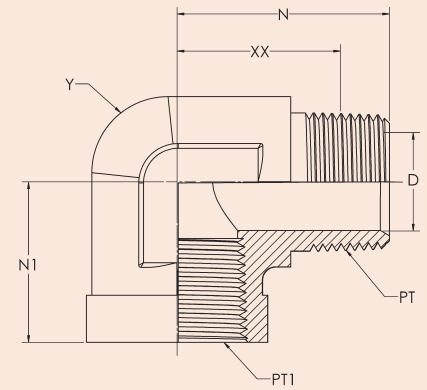

P-MM

Male Pipe Elbow

5500

SAE 140237

Part #	PT NPTF	PT1 NPTF	D DRILL	D1 DRILL	N	N1	XX	XXX	Y Across Wrench Flats	Dynamic Pressure Rtg
P-1/8-MM	1/8-27	1/8-27	.187	.187	.78	.78	.55	.55	7/16	6000
P-1/4-MM	1/4-18	1/4-18	.281	.281	1.09	1.09	.75	.75	9/16	6000
P-3/8-MM	3/8-18	3/8-18	.406	.406	1.22	1.22	.87	.87	3/4	6000
P-3/8 X 1/4-MM	3/8-18	1/4-18	.406	.281	1.22	1.22	.87	.87	3/4	6000
P-1/2-MM	1/2-14	1/2-14	.531	.531	1.47	1.47	1.01	1.01	7/8	6000
P-1/2 X 3/8-MM	1/2-14	3/8-18	.531	.406	1.47	1.28	1.01	.82	7/8	6000
P-3/4-MM	3/4-14	3/4-14	.719	.719	1.59	1.59	1.11	1.11	1 1/16	4000
P-3/4 X 1/2-MM	3/4-14	1/2-14	.719	.531	1.59	1.47	1.11	.99	1 1/16	4000
P-1-MM	1-11 1/2	1-11 1/2	.938	.938	1.97	1.97	1.40	1.40	1 5/8	3000
P-1 X 3/4-MM	1-11 1/2	3/4-14	.938	.719	1.97	1.78	1.40	1.30	1 5/16	3000
P-1 1/4-MM	1 1/4-11 1/2	1 1/4-11 1/2	1.250	1.250	2.22	2.22	1.63	1.63	1 7/8	2500
P-1 1/2-MM	1 1/2-11 1/2	1 1/2-11 1/2	1.500	1.500	2.34	2.34	1.75	1.75	1 7/8	2500

P-MF


Street Elbow

5502


SAE 140239

Part #	PT NPTF	PT1 NPTF	D DRILL	N	N1	XX	Y Across Wrench Flats	Dynamic Pressure Rtg
P-1/8-MF	1/8-27	1/8-27	.188	0.78	0.66	0.55	9/16	5000
P-1/8 X 1/4-MF	1/8-27	1/4-18	.188	0.88	0.88	0.65	9/16	5000
P-1/4-MF	1/4-18	1/4-18	.281	1.09	0.88	0.75	3/4	5000
P-1/4 X 1/8-MF	1/4-18	1/8-27	.281	1.09	0.66	0.75	9/16	5000
P-1/4 X 1/2-MF	1/4-18	1/2-14	.281	1.28	1.23	0.89	1 1/16	3000
P-1/4 X 3/8-MF	1/4-18	3/8-18	.281	1.22	1.01	0.87	7/8	4500
P-3/8-MF	3/8-18	3/8-18	.406	1.22	1.02	0.87	7/8	4500
P-3/8 X 1/4-MF	3/8-18	1/4-18	.406	1.22	0.88	0.87	3/4	5000
P-3/8 X 1/2-MF	3/8-18	1/2-14	.406	1.28	1.23	0.93	1 1/16	3000
P-1/2-MF	1/2-14	1/2-14	.531	1.47	1.23	1.01	1 1/16	3000
P-1/2 X 3/8-MF	1/2-14	3/8-18	.531	1.48	1.25	1.02	7/8	4500
P-1/2 X 3/4-MF	1/2-14	3/4-14	.531	1.59	1.36	1.13	1 5/16	3000
P-3/4-MF	3/4-14	3/4-14	.719	1.59	1.36	1.11	1 5/16	3000
P-3/4 X 1/2-MF	3/4-14	1/2-14	.719	1.59	1.23	1.11	1 1/16	3000
P-1-MF	1-11 1/2	1-11 1/2	.938	1.97	1.63	1.40	1 5/8	1750
P- 1 1/4-MF	1 1/4-11 1/2	1 1/4-11 1/2	1.250	2.38	1.70	1.79	1 7/8	3000
P-1 1/2-MF	1 1/2-11 1/2	1 1/2-11 1/2	1.500	2.64	2.08	2.05	2 1/2	3000

P-MF-45

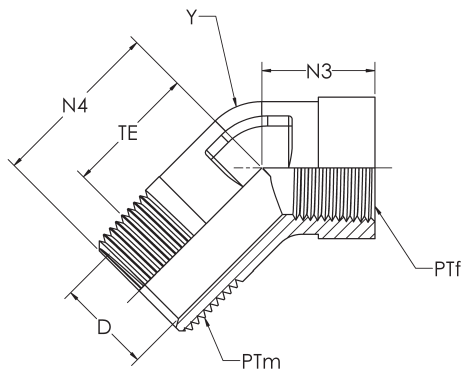

P-FF

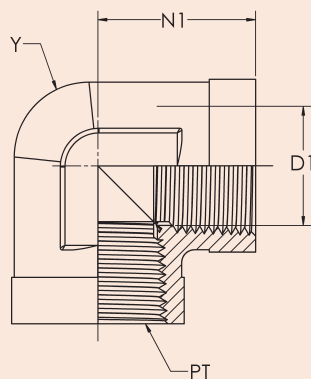

Pipe Fittings

P

45 Street Elbow

P-MF-45

Part #	PTm NPTF	PTf NPTF	D DRILL	N3	N4	TE	Y Across Wrench Flats	Dynamic Pressure Rtg
P-1/8-MF-45	1/8-27	1/8-27	.188	.47	.72	.23	9/16	5000
P-1/4-MF-45	1/4-18	1/4-18	.281	.63	1.05	.34	3/4	5000
P-3/8-MF-45	3/8-18	3/8-18	.406	.72	1.06	.35	7/8	4500
P-1/2-MF-45	1/2-14	1/2-14	.531	.91	1.34	.45	1 1/16	3000
P-3/4-MF-45	3/4-14	3/4-14	.719	.97	1.38	.48	1 5/16	3000
P-1-MF-45	1-11 1/2	1-11 1/2	.938	1.13	1.72	.57	1 5/8	1750
P-1 1/4-MF-45	1 1/4-11 1/2	1 1/4-11 1/2	1.250	1.63	1.80	.59	1 7/8	1500

5503
SAE 140339

Female Pipe Elbow • Female Pipe Thread/Female Pipe Thread


Tube Fitting Part #	PT Port THD NPTF	Ref D1 Drill	N1	Y Across Wrench Flats	Dynamic Pressure Rtg
P-1/8-FF	1/8-27	.328	.66	9/16	5000
P-1/4-FF	1/4-18	.422	.88	3/4	5000
P-3/8-FF	3/8-18	.563	1.02	7/8	4500
P-1/2-FF	1/2-14	.688	1.23	1 1/16	3000
P-3/4-FF	3/4-14	.891	1.36	1 5/16	3000
P-1-FF	1-11 1/2	1.125	1.62	1 5/8	1750
P-1 1/4-FF	1 1/4-11 1/2	1.469	1.70	1 7/8	1500
P-1 1/2-FF	1 1/2-11 1/2	1.703	2.08	2 1/2	1500

P-FF
5504
SAE 140238


800.333.2636

Omega1.com

P-FF-45

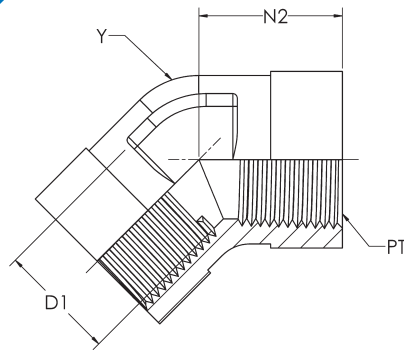

P-MMM

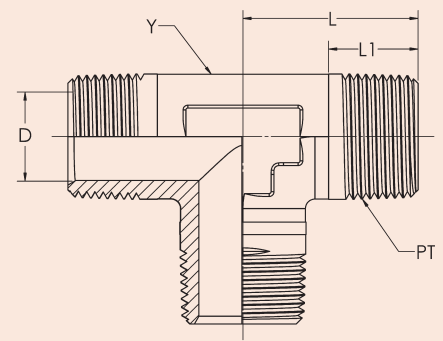

P-FF-45

Female Pipe Elbow-45 • Female Pipe Thread/Female Pipe Thread

5505
SAE 140338

Tube Fitting Part #	PT Port Thread NPTF	Ref D1 Drill	N2	Y Across Wrench Flats	Dynamic Pressure Rtg
P-1/4-FF-45	1/4-18	.422	.69	3/4	5000
P-3/8-FF-45	3/8-18	.563	.75	7/8	4500
P-1/2-FF-45	1/2-14	.688	.94	1 1/16	3000
P-3/4-FF-45	3/4-14	.906	1.00	1 5/16	3000
P-1-FF-45	1-11 1/2	1.125	1.19	1 5/8	1750


P-MMM

Female Pipe Tee • Male Pipe Thread (all three ends)


5600
SAE 140437

Tube Fitting Part #	PT Port Thread NPTF	D	L	L1	Y Across Wrench Flats	Dynamic Pressure Rating
P-1/8-MMM	1/8-27	.19	.78	.38	7/16	5000
P-1/4-MMM	1/4-18	.28	1.09	.56	9/16	5000
P-3/8-MMM	3/8-18	.41	1.22	.56	3/4	4500
P-1/2-MMM	1/2-14	.53	1.47	.75	7/8	3000
P-3/4-MMM	3/4-14	.72	1.59	.75	1-1/16	3000

P-FMF

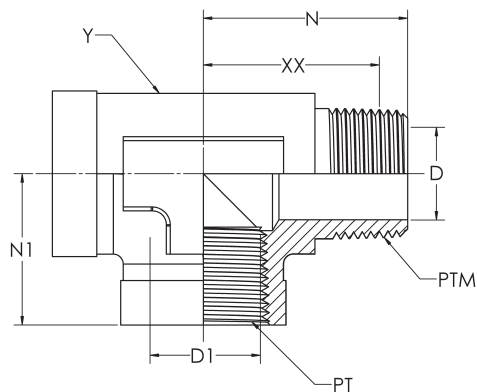

P-FFM

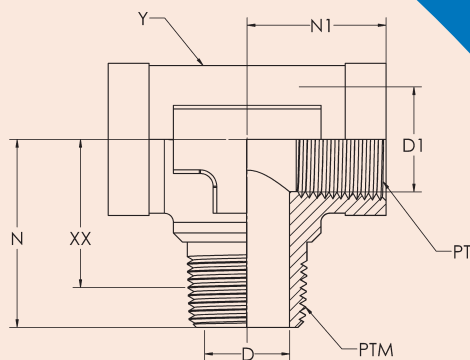

Pipe Fittings

P

P-FMF

Male Run Tee • Male Pipe Thread/Female Pipe Thread

Tube Fitting PART #	PTM Port THD NPTF	PT Port THD NPTF	D Drill	Ref D1 Drill	N	N1	XX After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
P-1/8-FMF	1/8-27	1/8-27	.188	.328	.78	.66	0.55	9/16	5000
P-1/4-FMF	1/4-18	1/4-18	.281	.422	1.09	.88	.75	3/4	5000
P-3/8-FMF	3/8-18	3/8-18	.406	.563	1.22	1.02	.87	7/8	4500
P-1/2-FMF	1/2-14	1/2-14	.531	.688	1.47	1.23	1.01	1 1/16	3000
P-3/4-FMF	3/4-14	3/4-14	.719	.891	1.59	1.36	1.11	1 5/16	3000
P-1-FMF	1-11 1/2	1-11 1/2	.938	1.125	1.97	1.63	1.40	1 5/8	1750
P-1 1/4-FMF	1 1/4-11 1/2	1 1/4-11 1/2	1.25	1.469	2.38	1.7	1.11	1.875	1500
P-1 1/2-FMF	1 1/2-11 1/2	1 1/2-11 1/2	1.5	1.719	2.64	2.08	2.05	2.5	1500

5602
SAE 140424

P-FFM

Male Branch Tee • Male Pipe Thread/Female Pipe Thread


Tube Fitting PART #	PTM Port THD NPTF	PT Port THD NPTF	D Drill	Ref D1 Drill	N	N1	XX After Assy.	Y Across Wrench Flats	Dynamic Pressure Rtg
P-1/8-FFM	1/8-27	1/8-27	.188	.328	.78	.66	.55	9/16	5000
P-1/4-FFM	1/4-18	1/4-18	.281	.422	1.09	.88	.75	3/4	5000
P-3/8-FFM	3/8-18	3/8-18	.406	.563	1.22	1.02	.87	7/8	4500
P-1/2-FFM	1/2-14	1/2-14	.531	.688	1.47	1.23	1.01	1 1/16	3000
P-3/4-FFM	3/4-14	3/4-14	.719	.891	1.59	1.36	1.11	1 5/16	3000
P-1-FFM	1-11 1/2	1-11 1/2	.938	1.125	1.97	1.62	1.40	1 5/8	1750

5604
SAE 140425


800.333.2636

Omega1.com

P-FFF

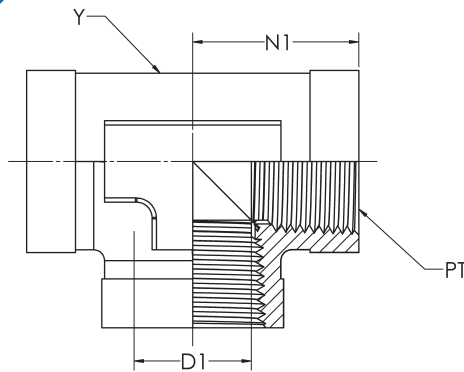

P-GCM

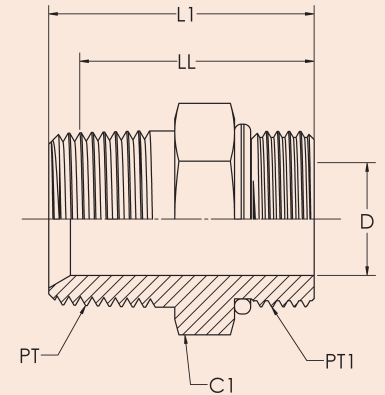

P-FFF

Female Pipe Tee • Female Pipe Thread (all three ends)

5605
SAE 140438

Tube Fitting Part #	PT Port THD NPTF	Ref D1 Drill	N1	Y Across Wrench Flats	Dynamic Pressure Rating
P-1/8-FFF	1/8-27	.312	.66	9/16	5000
P-1/4-FFF	1/4-18	.422	.88	3/4	5000
P-3/8-FFF	3/8-18	.563	1.02	7/8	4500
P-1/2-FFF	1/2-14	.688	1.23	1 1/16	3000
P-3/4-FFF	3/4-14	.906	1.36	1 5/16	3000
P-1-FFF	1-11 1/2	1.125	.162	1 5/8	1750
P-1 1/4-FFF	1 1/4-11 1/2	1.469	1.70	1 7/8	1500
P-1 1/2-FFF	1 1/2-11 1/2	1.719	2.08	2 1/2	1500


P-GCM

Male Pipe Adapter • Straight Thread O-Ring/Male Pipe Thread


6401
SAE 090109B

Tube Fitting Part #	PT Port Thread NPTF	PT1 Port THD NPTF	C1 Hex	D Drill	L1	LL	Dynamic Pressure Rtg
P-4-1/8-GCM	7/16-20	1/8-27	9/16	.172	1.00	.64	6000
P-4-1/4-GCM	7/16-20	1/4-18	9/16	.172	1.20	.81	6000
P-5-1/4-GCM	1/2-20	1/4-18	5/8	.234	1.20	.81	6000
P-6-1/4-GCM	9/16-18	1/4-18	11/16	.297	1.25	.86	6000
P-6-3/8-GCM	9/16-18	3/8-18	11/16	.297	1.34	.95	6000
P-8-3/8-GCM	3/4-16	3/8-18	7/8	.391	1.36	.92	6000
P-8-1/2-GCM	3/4-16	1/2-14	7/8	.391	1.53	1.09	6000
P-10-1/2-GCM	7/8-14	1/2-14	1	.484	1.59	1.09	5400
P-12-3/4-GCM	1 1/16-12	3/4-14	1 1/4	.656	1.80	1.21	4800
P-16-3/4-GCM	1 5/16-12	3/4-14	1 1/2	.719	1.78	1.19	3600
P-16-1-GCM	1 5/16-12	1-11 1/2	1 1/2	.875	1.98	1.39	3600
P-20-1 1/4-GCM	1 5/8-12	1 1/4-11 1/2	1 7/8	1.078	2.02	1.43	3000

P-GCF

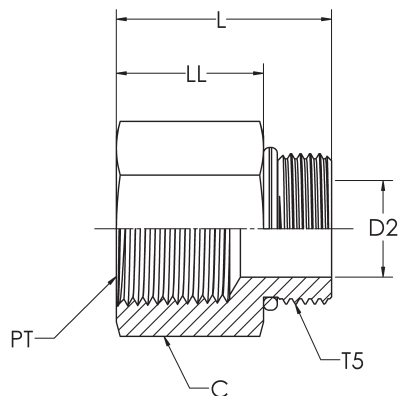

P-GP

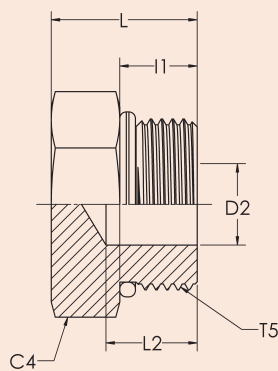

Pipe Fittings

P

P-GCF

Female Pipe Adapter • Straight thread O-Ring/Female Pipe Thread

Tube Fitting Part #	T5 Port THD UN/UNF-2A	PT Port THD NPTF	C Hex	D2 Drill	L	LL After Assy.	Dynamic Pressure Rtg
P-2-1/8-GCF	5/16-24	1/8-27	9/16	.094	.91	.61	7200
P-4-1/8-GCF	7/16-20	1/8-27	9/16	.172	1.00	.64	7200
P-4-1/4-GCF	7/16-20	1/4-18	3/4	.172	1.16	.80	7200
P-5-1/4-GCF	1/2-20	1/4-18	3/4	.234	1.19	.83	7200
P-6-1/4-GCF	9/16-18	1/4-18	3/4	.297	1.16	.77	7200
P-6-3/8-GCF	9/16-18	3/8-18	7/8	.297	1.28	.89	7200
P-6-1/2-GCF	9/16-18	1/2-14	1 1/8	.297	1.53	1.14	7200
P-8-1/8-GCF	3/4-16	1/8-27	7/8	.391	.80	.36	7200
P-8-1/4-GCF	3/4-16	1/4-18	7/8	.391	1.13	.69	7200
P-8-3/8-GCF	3/4-16	3/8-18	7/8	.391	1.28	.84	7200
P-8-1/2-GCF	3/4-16	1/2-14	1 1/8	.391	1.50	1.06	6000
P-10-1/4-GCF	7/8-14	1/4-18	1	.500	.81	.31	6600
P-10-3/8-GCF	7/8-14	3/8-18	1	.500	1.31	.81	6600
P-10-1/2-GCF	7/8-14	1/2-14	1 1/8	.500	1.53	1.03	6000
P-10-3/4-GCF	7/8-14	3/4-14	1 3/8	.500	1.63	1.13	4800
P-12-1/4-GCF	1 1/16-12	1/4-18	1 1/4	.656	1.00	.41	6000
P-12-1/2-GCF	1 1/16-12	1/2-14	1 1/4	.656	1.41	.82	6000
P-12-3/4-GCF	1 1/16-12	3/4-14	1 3/8	.656	1.72	1.13	4800
P-14-1/2-GCF	1 3/16-12	1/2-14	1 3/8	.719	1.06	.47	4800
P-14-3/4-GCF	1 3/16-12	3/4-14	1 3/8	.719	1.69	1.10	4800
P-16-1/2-GCF	1 5/16-12	1/2-14	1 1/2	.844	1.00	.41	4800
P-16-3/4-GCF	1 5/16-12	3/4-14	1 1/2	.844	1.50	.91	4800
P-16-1-GCF	1 5/16-12	1-11 1/2	1 5/8	.875	1.88	1.29	3600
P-20-1-GCF	1 5/8-12	1-11 1/2	1 7/8	1.078	1.00	.41	3600
P-20-1 1/4-GCF	1 5/8-12	1 1/4-11 1/2	2	1.078	1.97	1.38	3000
P-20-1 1/2-GCF	1 5/8-12	1 1/2-11 1/2	2 1/4	1.078	2.16	1.56	2400
P-24-1-GCF	1 7/8-12	1-11 1/2	2 1/8	1.344	1	.41	3000
P-24-1 1/4-GCF	1 7/8-12	1 1/4-11 1/2	2 1/8	1.312	1.94	1.35	3000
P-24-1 1/2-GCF	1 7/8-12	1 1/2-11 1/2	2 1/4	1.344	2	1.41	2400
P-32-2-GCF	2 1/2-12	2-11 1/2	2 7/8	1.781	2.06	1.47	2400

6405
SAE 140425

Hex Head Plug • Hex Head/Straight Thread O-Ring

Tube Fitting Part #	T5 Port THD UN/UNF-2A	C4 Hex	D2 Drill*	I1	L	L2*	Dynamic Pressure Rtg
P-2-GP	5/16-24	7/16	.093	.30	.60	.38	7200
P-3-GP	3/8-24	1/2	.125	.30	.60	.34	7200
P-4-GP	7/16-20	9/16	.203	.36	.67	.41	7200
P-5-GP	1/2-20	5/8	.234	.36	.67	.39	7200
P-6-GP	9/16-18	11/16	.297	.39	.73	.44	7200
P-8-GP	3/4-16	7/8	.422	.44	.80	.44	7200
P-10-GP	7/8-14	1	.500	.50	.93	.47	7200
P-12-GP	1 1/16-12	1 1/4	.656	.59	1.09	.59	7200
P-14-GP	1 3/16-12	1 3/8	.718	.59	1.09	.56	6600
P-16-GP	1 5/16-12	1 1/2	.875	.59	1.12	.50	6600
P-20-GP	1 5/8-12	1 7/8	1.093	.59	1.20	.66	4800
P-24-GP	1 7/8-12	2 1/8	1.344	.59	1.27	.34	3600
P-32-GP	2 1/2-12	2 3/4	1.813	.59	1.43	.56	2400

*D2 DRILL & L2 DRILL DEPTH ARE AN OPTIONAL MANUFACTURING METHOD PER SAE J514


P-GP

6408
SAE 090109A


800.333.2636

Omega1.com

P-FSU

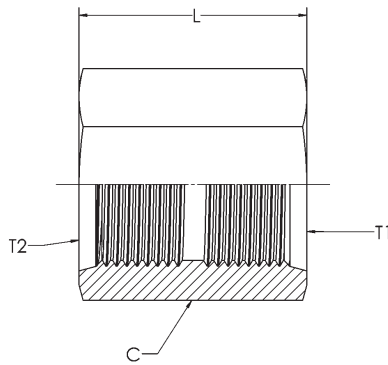

P-CGP

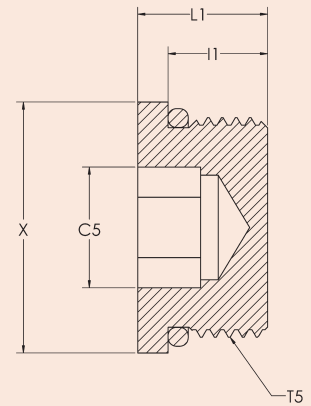

P-FSU

Straight Thread Coupling • Female SAE/Female SAE


Tube Fitting PART #	T1 Port THD UN/UNF-2A	T2 Port THD UN/UNF-2A	C Hex	L	Dynamic Pressure Rating
P-4-FSU	7/16-20	7/16-20	11/16	1.13	7000
P-6-FSU	9/16-18	9/16-18	13/16	1.26	6000
P-8-FSU	3/4-16	3/4-16	1	1.42	5000
P-10-FSU	7/8-14	7/8-14	1 3/16	1.6	4500
P-12-FSU	1 1/16-12	1 1/16-12	1 3/8	1.85	4500
P-16-FSU	1 5/16-12	1 5/16-12	1 5/8	1.85	3500

P-CGP

Hollow Hex Plug • Hollow Hex/Straight Thread O-Ring

6408-H
SAE 090109B

Tube Fitting PART #	T5 Port THD UN/UNF-2A	C5 Hex	I1	L1	X Dia.	Dynamic Pressure Rating
P-2-CGP	5/16-24	1/8	.297	.40	.438	7200
P-3-CGP	3/8-24	1/8	.397	.40	.500	7200
P-4-CGP	7/16-20	3/16	.360	.47	.563	7200
P-5-CGP	1/2-20	3/16	.360	.47	.625	7200
P-6-CGP	9/16-18	1/4	.391	.50	.688	7200
P-8-CGP	3/4-16	5/16	.438	.58	.875	7200
P-10-CGP	7/8-14	3/8	.500	.65	1.000	7200
P-12-CGP	1 1/16-12	9/16	.594	.77	1.250	7200
P-14-CGP	1 3/16-12	9/16	.594	.77	1.375	6600
P-16-CGP	1 5/16-12	5/8	.594	.77	1.500	6600
P-20-CGP	1 5/8-12	3/4	.594	.77	1.875	4800
P-24-CGP	1 7/8-12	3/4	.594	.77	2.125	3600

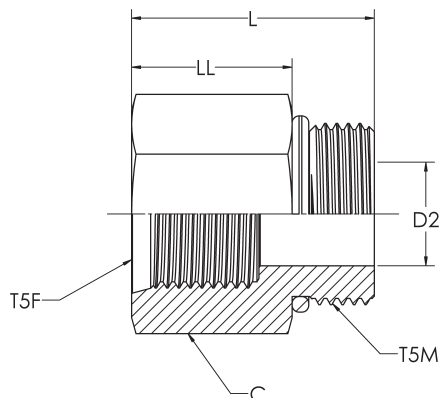

Straight Thread Reducer/Expander
Straight Thread O-Ring/Female Straight Thread O-Ring Port

P-GCFS


Tube Fitting Part #	T5F	T5M	C Hex	D2 Drill	L	LL After Assy.	Dynamic Pressure Rtg
P-4-4-GCFS	7/16-20	7/16-20	11/16	.172	1.08	.72	5400
P-4-6-GCFS	9/16-18	7/16-20	13/16	.172	1.16	.80	5400
P-6-4-GCFS	7/16-20	9/16-18	11/16	.297	1.03	.64	5400
P-6-8-GCFS	3/4-16	9/16-18	1 1/16	.297	1.38	.99	4800
P-8-6-GCFS	9/16-18	3/4-16	7/8	.438	1.13	.69	5400
P-8-10-GCFS	7/8-14	3/4-16	1 1/8	.391	1.56	1.12	3600
P-10-6-GCFS	9/16-18	7/8-14	1	.484	.81	.31	6000
P-10-8-GCFS	3/4-16	7/8-14	1	.563	1.31	.81	4800
P-10-12-GCFS	1 1/16-12	7/8-14	1 3/8	.484	1.69	1.19	4200
P-12-8-GCFS	3/4-16	1 1/16-12	1 1/4	.625	1.00	.41	5400
P-12-10-GCFS	7/8-14	1 1/16-12	1 1/4	.625	1.53	.94	3600
P-12-16-GCFS	1 5/16-12	1 1/16-12	1 5/8	.625	1.88	1.29	2400
P-16-8-GCFS	3/4-16	1 5/16-12	1 1/2	.750	1.00	.41	6000
P-16-10-GCFS	7/8-14	1 5/16-12	1 1/2	.797	1.00	.41	4200
P-16-12-GCFS	1 1/16-12	1 5/16-12	1 1/2	.750	1.75	1.16	4200
P-16-20-GCFS	1 5/8-12	1 5/16-12	2 1/8	.875	1.97	1.38	3000
P-20-6-GCFS	9/16-18	1 5/8-12	1 7/8	1.063	1.00	.41	3600
P-20-12-GCFS	1 1/16-12	1 5/8-12	1 7/8	1.063	1.00	.41	3600
P-20-16-GCFS	1 5/16-12	1 5/8-12	1 7/8	1.063	1.88	.41	2400
P-20-24-GCFS	1 7/8-12	1 5/8-12	2 1/2	1.63	1.88	1.29	1800
P-24-12-GCFS	1 1/16-12	1 7/8-12	2 1/8	1.250	1.00	.41	2400
P-24-16-GCFS	1 5/16-12	1 7/8-12	2 1/8	1.250	1.00	.41	2400
P-24-20-GCFS	1 5/8-12	1 7/8-12	2 1/8	1.250	1.75	1.16	2400
P-32-24-GCFS	1 7/8-12	2 1/2-12	2 3/4	1.780	1.00	.38	1800

6410


800.333.2636

Omega1.com

PS-C

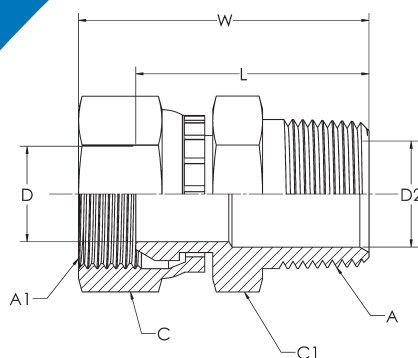

PS-FC

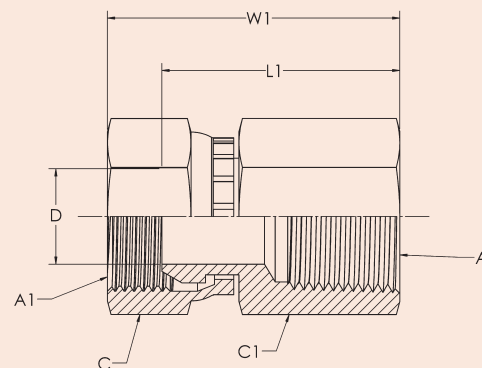

PS-C

Male Pipe Adapter • NPSM Swivel / Male Pipe Thread

1404
SAE 140130

Tube Fitting PART #	Pipe Size	A1 Pipe THD NPTF	A Swivel THD NPSM	C Hex	C1 Hex	D Drill	D2 Drill	L	W	Dynamic Pressure Rtg
PS-2-2-C	1/8	1/8-27	1/8-27	9/16	9/16	.156	.188	.94	1.09	6000
PS-2-4-C	1/8	1/4-18	1/4-18	11/16	5/8	.219	.188	1.06	1.24	6000
PS-4-4-C	1/4	1/4-18	1/4-18	11/16	11/16	.219	.281	1.25	1.43	6000
PS-4-6-C	1/4	3/8-18	3/8-18	7/8	13/16	.344	.281	1.25	1.45	6000
PS-4-8-C	1/4	1/2-14	1/2-14	1	15/16	.469	.281	1.44	1.44	6000
PS-6-4-C	3/8	1/4-18	1/4-18	11/16	11/16	.219	.406	1.31	1.49	4800
PS-6-6-C	3/8	3/8-18	3/8-18	7/8	7/8	.344	.406	1.31	1.51	4800
PS-6-8-C	3/8	1/2-14	1/2-14	1	15/16	.469	.406	1.44	1.73	4800
PS-8-6-C	1/2	3/8-18	3/8-18	7/8	7/8	.344	.531	1.50	1.70	4200
PS-8-8-C	1/2	1/2-14	1/2-14	1	1	.469	.531	1.62	1.91	4200
PS-8-12-C	1/2	3/4-14	3/4-14	1 1/4	1 1/4	.641	.531	1.69	2.04	4200
PS-12-8-C	3/4	1/2-14	1/2-14	1	1 1/8	.469	.719	1.62	1.91	2700
PS-12-C	3/4	3/4-14	3/4-14	1 1/4	1 1/4	.641	.719	1.69	2.04	2700
PS-12-16-C	3/4	1-11 1/2	1-11 1/2	1 1/2	1 1/2	.844	.719	1.80	2.17	2700
PS-16-12-C	1	3/4-14	3/4-14	1 1/2	1 3/8	.641	.938	1.94	2.29	2400
PS-16-C	1	1-11 1/2	1-11 1/2	1 1/2	1 1/2	.844	.938	2.00	2.37	2400
PS-16-20-C	1	1 1/4-11 1/2	1 1/4-11 1/2	1 7/8	1 3/4	1.141	.938	2.00	2.38	2400
PS-20-16-C	1 1/4	1-11 1/2	1-11 1/2	1 1/2	1 7/8	0.844	1.25	2.09	2.46	1950
PS-20-C	1 1/4	1 1/4-11 1/2	1 1/4-11 1/2	1 7/8	1 7/8	1.141	1.25	2.09	2.47	1950
PS-24-C	1 1/2	1 1/2-11 1/2	1 1/2-11 1/2	2 1/8	2 1/8	1.359	1.5	2.19	2.61	1950
PS-32-C	2	2-11 1/2	2-11 1/2	2 5/8	2 5/8	1.813	1.938	2.37	2.8	1350


PS-FC

Female Pipe Adapter • NPSM Swivel Pipe Thread


1405
SAE 140131

Tube Fitting PART #	Pipe Size	A Pipe THD NPTF	A1 Swivel THD NPSM	C Hex	C1 Hex	D Drill	L1	W1	Dynamic Pressure Rtg
PS-2-FC	1/8	1/8-27	1/8-27	9/16	9/16	.156	.87	1.02	6000
PS-4-FC	1/4	1/4-18	1/4-18	11/16	11/16	.219	1.25	1.43	6000
PS-6-4-FC	3/8	3/8-18	1/4-18	11/16	7/8	.219	1.31	1.49	4800
PS-6-FC	3/8	3/8-18	3/8-18	7/8	7/8	.344	1.31	1.51	4800
PS-8-6-FC	1/2	1/2-14	3/8-18	7/8	1	.344	1.45	1.65	4200
PS-8-FC	1/2	1/2-14	1/2-14	1	1	.469	1.50	1.79	4200
PS-12-FC	3/4	3/4-14	3/4-14	1 1/4	1 1/4	.641	1.62	1.97	2700
PS-16-FC	1	1-11 1/2	1-11 1/2	1 1/2	1 1/2	.844	2.00	2.37	2400
PS-20-FC	1 1/4	1 1/4-11 1/2	1 1/4-11 1/2	1 7/8	1 7/8	1.141	2.00	2.38	1950
PS-24-FC	1 1/2	1 1/2-11 1/2	1 1/2-11 1/2	2 1/8	2 1/8	1.359	2.00	2.42	1500
PS-32-FC	2	2-11 1/2	2-11 1/2	2 5/8	2 5/8	1.813	2.12	2.55	1350

PS-FE

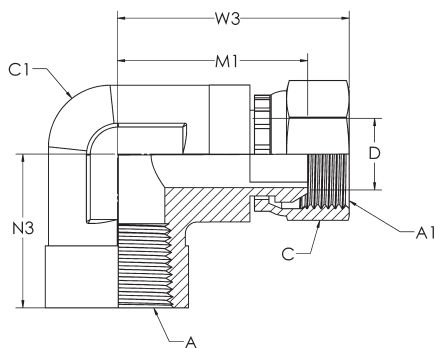

PS-ME

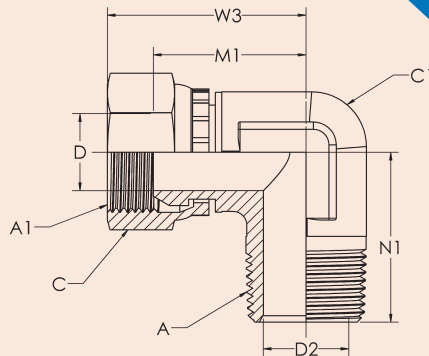

Pipe Fittings

P

Female Pipe Elbow • NPSM Swivel / Female Pipe Thread

Tube Fitting PART #	Pipe Size	A1 Pipe THD NPTF	A1 Swivel THD NPSM	C Hex	C1 Hex	D Drill	M1	W3	N3	Dynamic Pressure Rtg
PS-2-2-FE	1/8	1/8-27	1/8-27	9/16	9/16	.156	.80	.95	.66	5000
PS-4-4-FE	1/4	1/4-18	1/4-18	11/16	3/4	.219	.99	1.17	.88	5000
PS-6-6-FE	3/8	3/8-18	3/8-18	7/8	7/8	.344	1.06	1.26	1.02	4000
PS-8-8-FE	1/2	1/2-14	1/2-14	1	1 1/16	.469	1.24	1.53	1.23	3500
PS-12-FE	3/4	3/4-14	3/4-14	1 1/4	1 5/16	.641	1.47	1.82	1.36	2250
PS-16-FE	1	1-11 1/2	1-11 1/2	1 1/2	1 5/8	.844	1.73	2.10	1.62	2000
PS-20-FE	1 1/4	1 1/4-11 1/2	1 1/4-11 1/2	1 7/8	1 7/8	1.141	1.83	2.21	1.70	1625
PS-24-FE	1 1/2	1 1/2-11 1/2	1 1/2-11 1/2	2 1/8	2 1/2	1.359	2.41	2.83	2.08	1250
PS-32-FE	2	2-11 1/2	2-11 1/2	2 5/8	2 4/5	1.813	2.57	3	2.39	1125

1502
SAE140231


Male Pipe Elbow • NPSM Swivel / Male Pipe Thread

Tube Fitting PART #	Pipe Size	A Pipe THD NPTF	A1 Swivel THD NPSM	C Hex	C1	D Drill	D2 Drill	M1	N1	W3	Dynamic Pressure Rtg
PS-2-2-ME	1/8	1/8-27	1/8-27	9/16	7/16	.156	.188	.70	.72	.85	5000
PS-4-4-ME	1/4	1/4-18	1/4-18	11/16	9/16	.219	.281	.88	1.09	1.06	5000
PS-4-6-ME	1/4	1/4-18	3/8-18	7/8	3/4	.344	.281	.99	1.09	1.28	5000
PS-6-4-ME	3/8	3/8-18	1/4-18	11/16	3/4	.219	.406	.99	1.22	1.17	4000
PS-6-6-ME	3/8	3/8-18	3/8-18	7/8	3/4	.344	.406	.99	1.22	1.28	4000
PS-6-8-ME	3/8	3/8-18	1/2-14	1	3/4	.469	.406	1.04	1.22	1.33	4000
PS-8-6-ME	1/2	1/2-14	3/8-18	7/8	7/8	.344	.531	1.06	1.47	1.35	3500
PS-8-8-ME	1/2	1/2-14	1/2-14	1	7/8	.469	.531	1.11	1.47	1.4	3500
PS-8-12-ME	1/2	1/2-14	3/4-14	1 1/4	1 1/16	.641	.531	1.30	1.47	1.65	3500
PS-12-6-ME	3/4	3/4-14	3/8-18	7/8	1 1/16	.344	.719	1.19	1.59	1.48	2250
PS-12-8-ME	3/4	3/4-14	1/2-14	1	1 1/16	.469	.719	1.24	1.59	1.53	2250
PS-12-ME	3/4	3/4-14	3/4-14	1 1/4	1 1/16	.641	.719	1.30	1.59	1.65	2250
PS-16-12-ME	1	1-11 1/2	3/4-14	1 1/2	1 5/16	.641	.938	1.47	1.97	1.82	2000
PS-16-ME	1	1-11 1/2	1-11 1/2	1 1/2	1 5/16	.844	.938	1.54	1.97	1.91	2000
PS-20-ME	1 1/4	1 1/4-11 1/2	1 1/4-11 1/2	1 7/8	1 5/8	1.141	1.25	1.73	2.38	2.11	1625
PS-24-ME	1 1/2	1 1/2-11 1/2	1 1/2-11 1/2	2 1/8	1 7/8	1.359	1.5	1.89	2.64	2.31	1250
PS-32-ME	2	2-11 1/2	2-11 1/2	2 5/8	2 1/2	1.813	1.938	2.27	3	2.7	1125


1501
SAE140230

C1 HEX ACROSS THE FLATS


PS-ME-45

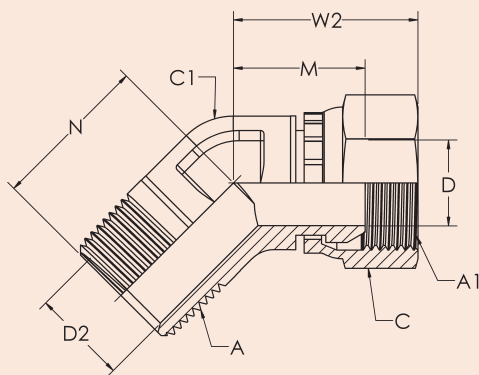

PL-JS

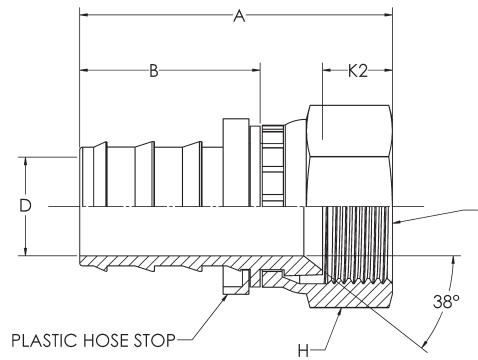

PL-MP

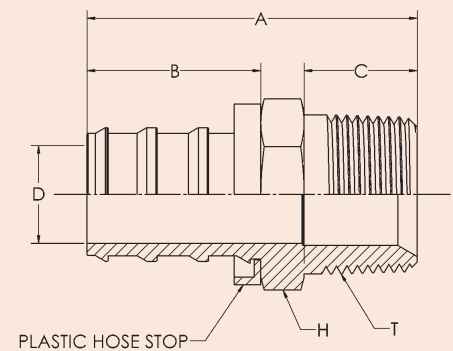

PS-ME-45

Male Pipe Elbow • NPSM Swivel/Male Pipe Thread

SAE140330

Tube Fitting PART #	Pipe Size	A Pipe THD NPTF	A1 Swivel THD NPSM	C Hex	C1	D Drill	D2 Drill	M	N	W2	Dynamic Pressure Rtg
PS-2-2-ME-45	1/8	1/8-27	1/8-27	9/16	7/16	.156	.188	.62	.52	.77	5000
PS-4-4-ME-45	1/4	1/4-18	1/4-18	11/16	9/16	.219	.281	.73	.86	.91	5000
PS-6-6-ME-45	3/8	3/8-18	3/8-18	7/8	3/4	.344	.406	.81	.95	1.10	4000
PS-8-6-ME-45	1/2	1/2-14	3/8-18	7/8	7/8	.344	.531	.81	1.17	1.10	3500
PS-8-8-ME-45	1/2	1/2-14	1/2-14	1	7/8	.469	.531	.88	1.17	1.17	3500
PS-8-12-ME-45	1/2	1/2-14	3/4-14	1 1/4	1 1/16	.641	.531	.87	1.20	1.22	3500
PS-12-8-ME-45	3/4	3/4-14	1/2-14	1	1 1/16	.469	.719	.94	1.20	1.23	2250
PS-12-ME-45	3/4	3/4-14	3/4-14	1 1/4	1 1/16	.641	.719	1.02	1.20	1.37	2250
PS-16-12-ME-45	1	1-11 1/2	3/4-14	1 1/4	1 5/16	.641	.938	1.12	1.48	1.47	2000
PS-16-ME-45	1	1-11 1/2	1-11 1/2	1 1/2	1 5/16	.844	.938	1.15	1.48	1.52	2000
PS-20-ME-45	1 1/4	1 1/4-11 1/2	1 1/4-11 1/2	1 7/8	1 5/8	1.141	1.250	1.23	1.67	1.61	1625
PS-24-ME-45	1 1/2	1 1/2-11 1/2	1 1/2-11 1/2	2 1/8	1 7/8	1.359	1.500	1.35	1.77	1.77	1250
PS-32-ME-45	2	2-11 1/2	2-11 1/2	2 5/8	2 1/2	1.813	1.938	1.46	2.11	1.89	1125

PL-JS

Push-On Hose Barb • Push On Hose Barb End/Female JIC Swivel End

2111

Tube Fitting PART #	Hose ID	Tube O.D.	T Thread	A	B	D	K2	H
PL-4-4-JS	1/4	1/4	7/16-20	1.56	.81	.17	.34	9/16
PL-6-6-JS	3/8	3/8	9/16-18	1.81	.95	.30	.38	11/16
PL-8-6-JS	3/8	1/2	3/4-16	1.88	.95	.30	.42	11/16
PL-8-8-JS	1/2	1/2	3/4-16	1.88	.95	.39	.42	7/8
PL-10-10-JS	5/8	5/8	7/8-14	2.58	1.50	.48	.50	7/8
PL-12-JS	3/4	3/4	1-1/16-12	2.65	1.50	.61	.58	1-1/4
PL-16-JS	1	1	1-5/16-12	2.77	1.50	.84	.59	1-1/2


PL-MP

Push-On Hose Barb • Push On Hose Barb End/Male Pipe End


2113

Tube Fitting PART #	Hose ID	Pipe Size T-THRD	A	B	C	D	H
PL-2-4-MP	1/4	1/8 x 27	1.39	.81	.39	.19	7/16
PL-4-4-MP	1/4	1/4 x 18	1.58	.81	.57	.19	9/16
PL-4-6-MP	3/8	1/4 x 18	1.78	.95	.57	.28	9/16
PL-6-4-MP	1/4	3/8 x 18	1.64	.81	.57	.19	11/16
PL-6-6-MP	3/8	3/8 x 18	1.78	.95	.57	.30	11/16
PL-6-8-MP	1/2	3/8 x 18	1.93	.95	.57	.39	11/16
PL-6-10-MP	5/8	3/8 x 18	2.39	1.5	.57	.48	7/8
PL-8-6-MP	3/8	1/2 x 14	2.03	.95	.76	.30	7/8
PL-8-8-MP	1/2	1/2 x 14	2.18	.95	.76	.39	7/8
PL-8-10-MP	5/8	1/2 x 14	2.58	1.5	.76	.50	7/8
PL-12-MP	3/4	3/4 x 14	2.61	1.5	.76	.61	1-1/8
PL-16-MP	1	1 x 11 - 1/2	2.86	1.5	.95	.84	1-3/8

PL-TX

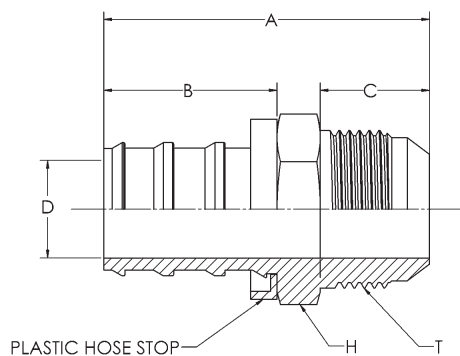

M2HC

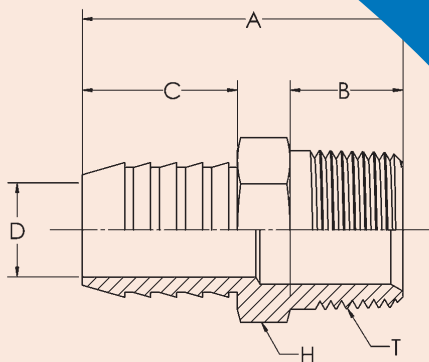

Pipe Fittings

P

PL-TX

Hose Barb Connector • Hose Barb End/Male Flare End

PART #	Hose	Tube	T Thread	A	B	C	D	Hex
PL-4-4-TX	1/4	1/4	7/16-20	1.57	.81	.550	.17	1/2
PL-6-6-TX	3/8	3/8	9/16-18	1.78	.95	.556	.30	5/8
PL-8-8-TX	1/2	1/2	3/4-16	2.06	.95	.657	.39	13/16

2116

M2HC

Hose Barb Connector • Hose Barb End/Male Pipe End

Tube Fitting PART #	Hose ID	Pipe Size T-THRD	Barb O.D. Max	A	B	C	D	H
1/8M2HC1/8	1/8	1/8 x 27	.160	1.00	.39	.41	.078	7/16
1/8M2HC1/4	1/8	1/4 x 18	.160	1.22	.57	.41	.078	9/16
1/4M2HC1/8	1/4	1/8 x 27	.303	1.41	.39	.78	.188	7/16
1/4M2HC1/4	1/4	1/4 x 18	.303	1.59	.57	.78	.188	9/16
1/4M2HC3/8	1/4	3/8 x 18	.303	1.62	.57	.78	.188	11/16
1/4M2HC1/2	1/4	1/2 x 14	.303	1.84	.76	.78	.188	7/8
3/8M2HC1/4	3/8	1/4 x 18	.450	1.71	.57	.88	.281	9/16
3/8M2HC3/8	3/8	3/8 x 18	.450	1.72	.57	.88	.297	11/16
3/8M2HC1/2	3/8	1/2 x 14	.450	1.85	.76	.88	.297	7/8
1/2M2HC1/2	1/2	1/2 x 14	.600	2.00	.76	.94	.375	7/8
1/2M2HC1/4	1/2	1/4 x 18	.600	1.82	.57	.94	.281	5/8
1/2M2HC3/8	1/2	3/8 x 18	.600	1.81	.57	.94	.375	11/16
1/2M2HC3/4	1/2	3/4 x 14	.600	2.04	.76	.94	.375	1-1/16
5/8M2HC1/2	5/8	1/2 x 14	.725	2.00	.76	.94	.500	7/8
3/4M2HC1/2	3/4	1/2 x 14	.900	2.09	.76	1.03	.531	1-1/16
3/4M2HC3/4	3/4	3/4 x 14	.900	2.13	.76	1.03	.625	1-1/16
3/4M2HC1	3/4	1 x 11-1/2	.900	2.40	.95	1.03	.625	1-3/8
1M2HC3/4	1	3/4 x 14	1.173	2.31	.76	1.13	.625	1-3/16
1M2HC1	1	1 x 11-1/2	1.173	2.50	.95	1.13	.780	1-3/8



Part Number Description

C - 53 SS - 16

① ② ③ ④

AMFM Braid Bands -

Quality Braid Bands manufactured to meet the requirements of the metal hose industry.



Our unique manufacturing process offers the most economical production of braid bands supported with years of engineering experience behind the manufacturing of our products. Our products and services are designed around the needs of today's metal hose fabricators.

Features

- ① **I.D.** - Formed in variable band types to accommodate a range of hose sizes
- ② **Materials** - Stainless 304 & 316, Copper and Monel
- ③ **Width** - A variety of widths available to suit your needs, or preference
- ④ **Thickness** - Variable material (wall) thickness available in each material type
- ⑤ **Impression Branding** - Braid bands fit over hose and can be imprinted to reflect the necessary information or your company logo.

Call toll free:

800.333.2636

Solid Braid Bands

BB

- 1 **Category**
M through H - See Detail Chart
- 2 **Size Number**
1 through 67 - (.405 through .3005 I.D.) See Detail Chart
- 3 **Material Code**
SS = 304 SS ST = 316 SS C = Copper M = Monel
- 4 **Non-Standard Width**
All widths other than standard are indicated in 1/16" increments
(i.e.: - 4 = 1/4" width; - 10 = 5/8" width; - 22 = 1 3/8" width)
NOTE: Only required when width is NOT standard
See Width Notes

	Size	I.D. (Fit Size)	SS	Material ST C M	
M	M-1	.405	•		
	M-2	.420	•		
	M-3	.435	•		
	M-4	.450	•		
	M-5	.465	•		
	M-6	.480	•		
	M-7	.495	•		
	M-8	.510	•		
	M-9	.525		•	
	M-10	.540	•		
	M-11	.555	•	•	
	M-12	.570		•	
	M-13	.585	•	•	
	M-14	.600	•	•	
	M-15	.615	•		
	M-16	.630	•		
	M-17	.645	•		
A	A-18	.660	•	•	•
	A-19	.675	•	•	•
	A-20	.690	•	•	•
	A-21	.705	•	•	•
	A-22	.720	•	•	•
	A-23	.735	•	•	•
	A-24	.750	•	•	•
	A-25	.765	•	•	•
	A-26	.780	•	•	•
	A-27	.795	•	•	•
	A-28	.810	•	•	•
	A-29	.825	•	•	•
	A-30	.840	•	•	•
	A-31	.855	•	•	•
B	B-32	.870	•	•	•
	B-33	.885	•	•	•
	B-34	.900	•	•	•
	B-35	.915	•	•	•
	B-36	.930	•	•	•
	B-37	.945	•	•	•
	B-38	.960	•	•	•
	B-39	.975	•	•	•
	B-40	.990	•	•	•
C	C-41	1.005	•	•	•
	C-42	1.020	•	•	•
	C-43	1.035	•	•	•
	C-44	1.050	•	•	•
	C-45	1.065	•	•	•
	C-46	1.080	•	•	•
	C-47	1.095	•	•	•
	C-48	1.110	•	•	•
	C-49	1.125	•	•	•
	C-50	1.140	•	•	•
	C-51	1.155	•	•	•
	C-52	1.170	•	•	•
C	C-53	1.185	•	•	•
	C-54	1.200	•	•	•
	C-55	1.215	•	•	•
	C-56	1.230	•	•	•

	Size	I.D. (Fit Size)	SS	Material ST C M	
D	D-57	1.245	•	•	
	D-58	1.260	•	•	•
	D-59	1.275	•	•	•
	D-60	1.290	•	•	•
	D-61	1.305	•	•	•
	D-62	1.320	•	•	•
	D-63	1.335	•	•	•
	D-64	1.350	•	•	•
	D-65	1.365	•	•	•
	D-66	1.380	•	•	•
	D-67	1.395	•	•	•
	D-68	1.410	•	•	•
	D-69	1.425	•	•	•
	D-70	1.440	•	•	•
	D-71	1.455	•	•	•
	D-72	1.470	•	•	•
	D-73	1.485	•	•	•
E	E-74	1.500	•	•	•
	E-75	1.515	•	•	•
	E-76	1.530	•	•	•
	E-77	1.545	•	•	•
	E-78	1.560	•	•	•
	E-79	1.575	•	•	•
	E-80	1.590	•	•	•
	E-81	1.605	•	•	•
	E-82	1.620	•	•	•
	E-83	1.635	•	•	•
	E-84	1.650	•	•	•
	E-85	1.665	•	•	•
	E-86	1.680	•	•	•
	E-87	1.695	•	•	•
	E-88	1.710	•	•	•
	E-89	1.725	•	•	•
	E-90	1.740	•	•	•
F	E-91	1.755	•	•	•
	E-92	1.770	•	•	•
	E-93	1.785	•	•	•
	E-94	1.800	•	•	•
	E-95	1.815	•	•	•
	E-96	1.830	•	•	•
	F-97	1.845	•	•	•
	F-98	1.860	•	•	•
	F-99	1.875	•	•	•
	F-100	1.890	•	•	•
F	F-101	1.905	•	•	•
	F-102	1.920	•	•	•
	F-103	1.935	•	•	•
	F-104	1.950	•	•	•
	F-105	1.965	•	•	•
	F-106	1.980	•	•	•
	F-107	1.995	•	•	•
	F-108	2.010	•	•	•
	F-109	2.025	•	•	•
	F-110	2.040	•	•	•
	F-111	2.055	•	•	•
	F-112	2.070	•	•	•
	F-113	2.085	•	•	•
	F-114	2.100	•	•	•
	F-115	2.115	•	•	•
	F-116	2.130	•	•	•

	Size	I.D. (Fit Size)	SS	Material ST C M	
F	F-117	2.145	•	•	
	F-118	2.160	•	•	
	F-119	2.175	•	•	
	F-120	2.190	•	•	
	F-121	2.205	•	•	
	F-122	2.220	•	•	
	F-123	2.235	•	•	
	F-124	2.250	•	•	
	F-125	2.265	•	•	
	F-126	2.280	•	•	
	F-127	2.295	•	•	
	F-128	2.310	•	•	
	F-129	2.325	•	•	
	F-130	2.340	•	•	
	F-131	2.355	•	•	
	F-132	2.370	•	•	
FX	FX-133	2.385	•	•	
	FX-134	2.400	•	•	
	FX-135	2.415	•	•	
	FX-136	2.430	•	•	
	FX-137	2.445	•	•	
	FX-138	2.460	•	•	
	FX-139	2.475	•	•	
	FX-140	2.490	•	•	
	FX-141	2.505	•	•	
	FX-142	2.520	•	•	
	FX-143	2.535	•	•	
	FX-144	2.550	•	•	
	FX-145	2.565	•	•	
	FX-146	2.580	•	•	
	FX-147	2.595	•	•	
	FX-148a	2.610	•	•	
	FX-148b	2.625	•	•	
	FX-148c	2.640	•	•	
	FX-148d	2.655	•	•	
G	FX-148e	2.670	•	•	
	FX-149a	2.685	•	•	
	FX-149b	2.700	•	•	
	FX-149c	2.715	•	•	
	FX-149d	2.730	•	•	
	FX-149e	2.745	•	•	
	G-150	2.750	•	•	
	G-151	2.765	•	•	
	G-152	2.780	•	•	
	G-153	2.795	•	•	
G	G-154	2.810	•	•	
	G-155	2.825	•	•	
	G-156	2.840	•	•	
	G-157	2.855	•	•	
	G-158	2.870	•	•	
	G-159	2.885	•	•	
	H-160	2.900	•	•	
	H-161	2.915	•	•	
	H-162	2.930	•	•	
	H-163	2.945	•	•	
H	H-164	2.960	•	•	
	H-165	2.975	•	•	
	H-166	2.990	•	•	
	H-167	3.005	•	•	



Braid Band Specifications

AMFM Incorporated Braid Bands are manufactured to a "Fit Size" reflecting the hose size the band ID is produced to accommodate. There are two methods of specification:

1. AMFM Standard Specification, designated by AMFM part number, fit size indicated in ID column of catalog.
2. Customer Part Number Control, see Production Control section of this catalog for details.

I.D.
(Fit Size)

Braid Bands are manufactured to "Fit Size". Fit size can only be accurately determined at time of manufacture. Parts are subject to changes from handling, secondary operation, packaging and shipping. These changes do not affect the Fit Size for this intended use, unless the parts are mechanically deformed. Due to these minor dimension changes from handling, AMFM CANNOT provide parts to specific minimum or maximum dimensions, as it will cause limitation and incorrect Fit Size. Reference the Hose Sizing section (page 4) of this catalog for detail regarding properly sizing AMFM Incorporated braid bands.

STANDARD TOLERANCE: "Fit Size" + .010 / - .005

Standard Widths indicated below or Non-Standard Width as indicated by the part number. Non-standard widths are indicated as shown in the Part Number Description (P). All usable widths can be supplied. Delivery is subject to non-standard lead times depending on the specific requirements. Many alternate widths are available in as standard stock. Any width can be made standard stock with ongoing demand. Parts manufactured by Customer Specification require width indication.

Width

Material	M	A	B	C	D	E	F	FX	G	H
SS, ST, M	.375	.500	.625	.625	.750	.750	.750	.750	.750	.750
C	.375	.500	.500	.625	.625	.750	1.00	--	--	--

STANDARD TOLERANCE: Overall Width: + .060 / - .060

AMFM Incorporated Braid Bands have standard wall thickness as reflected by the chart below.

Wall
Thickness

Material	M	A	B	C	D	E	F	FX	G	H
SS, ST	.035	.049	.049	.049	.049	.049	.049	.049	.065	.065
C	.049	.049	.049	.055	.055	.055	.050	--	--	.068
M	--	.048	.037	.037	.037	.065	.065	--	--	--

STANDARD TOLERANCE: Varies by Materials +/- .0075 (max.)

Parts are produced in selected Standard Materials as indicated in charts.

Material

304 Stainless Steel	(SS)	ASTM 304 Stainless Steel (material certification available)
316 Stainless Steel	(ST)	ASTM 316 Stainless Steel (material certification available)
Copper	(C)	Alloy 122 Hard Copper
Monel	(M)	Alloy 400 – M (material certification available)

Solid Braid Bands

BB



Sizing AMFM Braid Bands

AMFM Braid Bands must be sized for each individual hose and configuration. This is specified Fit Size as defined in the specifications section of this catalog.

- The AMFM sizing gauge was developed exclusively for use with braided metal hose to indicate the appropriate AMFM Braid Band for the hose being measured.
- Selecting size from catalog dimensions from hose manufacturer or measuring hose without consulting factory is not recommended.
- More than one "standard" size increment will fit a braided hose with nominal difference except in smaller hose sizes (under 1").
- Double braid hoses generally require the equivalent increase of approximately three standard sizes over the single braid size.
- AMFM Braid Bands offer very close consistency and in some instances can exceed that of the hose. This may require alternate bands when a very tight fit is used that leaves no ability to consume a minor increase in hose diameter.



Parts Characteristics & Features

Out of Round	This value can only be determined at the time of manufacture in most sizes; Due to handling as mentioned in ID Section. Acceptable tolerances applied at time of manufacture do not affect the part "Fit Size".
Edge Protrusion	Referring to general edge condition. Single point protrusion or burr, with specification maximum of .0075" and .005", respectively. All edges burr free and square.
Edge Variation Edge (Parallel & Square)	With reference perpendicular to ID, part edge variations can deviate in parallel, part square, or basic material irregularities. Variations can involve a single edge or both. Specification calls for a maximum "gap distance" when measuring with reference to ID surface and corresponding perpendicular edge. Gap Specifications vary from .010" to .040" depending on part size and material.

Certification Available

AMFM Incorporated Braid Bands are manufactured to be used as temporary welding fixtures in the fabrication of industrial use metal hose assemblies only. No other usage or application is intended or recommended. To the extent that such products are used for any other purpose, AMFM INCORPORATED disclaims both their merchantability and fitness for such unintended use. There are no warranties which extend beyond the description contained herein.

800.333.2636

Omega1.com

WB

WB - 200 - S 08 SS

1

2

3

4

5

BC - RDM - S 16 SS

Standard Wrapped Bands

Availability

Material Type and Thickness			Profile 200 and Under			Profile 250 and Over	
Available Weight			-08	-12	-16	-08	-12
304SS	Light	.028	•	•	•		•
	Standard	.048		•			
	Heavy	.060			200 Only		
316SS	Light	.028			•		
	Standard	.048					
	Heavy	.060			200 Only		
Copper	Standard	.048				•	•
	Heavy	.060					•
Monel	Standard	.048	Consult Factory				



Imprinting Wrapped Bands

The same considerations provided when welding imprinted braid bands to metal hose must be considered when imprinting wrapped bands. Minimum band width typically required is 3/4". Reference the Imprinting section for full details.

Cut Strip

Availability

Material	Material Weight		Available Widths		
			08	12	16
304 Stainless Steel	Light	.028	•	•	•
	Standard	.048		•	•
	Heavy	.060			•
316 Stainless Steel	Standard	.048			•
	Heavy	.1			•
Copper	Standard	.048	•	•	•
	Heavy	.1		•	
Monel	Light	.032	•	•	
	Standard	.048			

All cut strip lengths are available on a custom basis. Lengths are not stocked with out prior arrangement. Lengths based on customer specification.

Wrapped Bands

BC

1 Product Code

WB = Wrapped Band
BC = Bulk Coil
CS = Cut Strip Available

2 Profile (I.D.)

Wrapped Bands

075 = 3/4"
100 = 1"
150 = 1 1/2"
200 = 2"
250 = 2 1/2"
300 = 3"
400 = 4"
500 = 5"
600 = 6"
800 = 8"
1000 = 10"
1200 = 12"

Bulk Coil

10 = 10'
25 = 25'
50 = 50'
100 = 100'
RDM = Random

3 Material Thickness

Light = .028
Standard = .048
Heavy = .060
Heavy = .060 Wrapped Bands
.065 Bulk Coil

4 Material Width

-08 = 1/2"
-12 = 3/4"
-16 = 1"
-20 = 1 1/4"
-24 = 1 1/2"

5 Material Code

SS = 304
ST = 316
C = Copper
M = Monel

Bulk Coil

Availability

Material Weight			Available Lengths				Available Widths				
			25'	50'	100'	RDM	08	12	16	20	24
304SS	Light	.028	•	•	POA	POA	•	•	•		
	Standard	.048	•	•	•	•		•	•		
	Heavy	.060	•	•	POA	•			•	•	
316SS	Light	.028	•	•	POA	POA			•		
	Standard	.048	•	•	POA	POA			•		
	Heavy	.060	•	•	POA	POA			•		
Copper	Light	.028	•	•	POA	POA	•	•	•		
	Standard	.048	•	•	POA	POA	•	•	•		
	Heavy	.060	•	•	POA	POA	•	•	•		
Monel	Light	.032	Monel Bulk coil is available in 8'-10' coil lengths only. Consult factory for details				•	•			
	Standard	.048						•			

POA – These items are non-stock, consult factory for lead times and availability.

AMFM Incorporated Bulk Strip is packaged conveniently for easy storage and use.



Bulk Coil Specifications

Material	Width	Material Thickness			Alloy/Grade
		Light	Standard	Heavy	
Stainless Steel	+.075/- .075	.026 to .031	.046 to .053	.057 to .065	Stainless 304 & 316
Copper	+.075/- .075	--	.047 to .053	.061 to .066	Copper - 110 Alloy
Monel	+.030/- .030	.030 to .034	.047 to .053	--	Monel - 400 Alloy

Length Tolerance: All Bulk Coil carries a plus only tolerance.

	10' Coil	25' Coil	50' Coil	100' Coil	Random Coil
I.D./O.D.	10"/11"	9"/11"	8 1/2" / 11"	7"/11"	12"/22"
Shipping Wt.	1 to 3#	2 to 7#	3 to 13#	13 to 26#	36 to 70#

Custom Imprinting

Custom imprinting offers increased flexibility for your metal hose fabrication. AMFM Incorporated imprinting programs allow you to customize assemblies to reflect important information. Typical applications include:

- Company name recognition
- Assembly dating
- Application information critical to end user

Feature	FIXED Program	FLEXIBLE Program
Wide range of type availability	•	
Variable letter spacing	•	
3 or more lines, single set up	•	
Logo or special type	•	
Imprinting all products	•	•
Change set up per release		•
Economical occasional user	•	•
Immediately available		•

Single Line Imprint

Unprinted area, approx. 1/8"
AMFM Inc.
Unprinted area, approx. 1/8"

Two Line Imprint

Unprinted area, approx. 1/8"
AMFM Inc.
800-333-2636
Unprinted area, approx. 1/8"

Type Sizing

Band width is important when considering type size. Small braid bands and narrow width wrapped bands have limited imprinting surface. For small parts, small type sizes is advisable. Consult factory for application questions.

Standard allocation for all programs includes allocation of 1/8" above and below the imprint area. Collars used as an ID tag do not require the additional space.

Note: Non-standard width part required for M and A series braid bands requiring two lines of flexible imprint. Consult factory for details; parts not welded to metal hose (used as tag) may not require non-standard width.

Fixed and Flexible programs detailed on the following pages.

Line Art/Company Logo Options:

Possible

A	M
F	M

Not Possible

AMFM
Incorporated



AMFM Recommendation:

For dating applications we recommend referencing the quarter and year. This allows you flexibility as far as dating your assemblies without wasting valuable inventory.

Custom Imprinting

Fixed Imprinting Program

- Permanent set up or company logo for long-term use.
- Specify standard with your order for no hassle purchasing.

The Fixed Imprinting program allows customers to establish a permanent imprint that cannot be changed. This allows for maximum investment for long-term use of a standard imprint. The fixed program may be combined with flexible program options.

Fixed Program Specifications

Typical Type Sizes	3/32"	1/8"	5/32"
Characters Per Line	Approx. 14	Approx. 10	Approx. 8
Fixed Imprint Types	Single Line	Two Separate Interchangeable Lines	Single Block
Part Width Requirement	Imprint area 1/4"	Imprint area 1/2"	Imprint area 5/32"
Features	• Imprinting single or multiple lines is possible. • Types size independent per line. • Line order changeable. • Multiple single lines can be established and used interchangeably as required. • Requires more space for imprint than single block		• Run full imprint only • Type sizes variable per line • Line order fixed • Tighter spacing allowing more imprint on less space.

Flexible Imprinting Program

- Ideal for one time marking or special identification limited occurrence
- Easy to specify as needed on per-order basis

The Flexible Imprinting program allows customers to set up a one time or limited occurrence imprint as needed. Use of our flexible worksheet allows for easy ordering and can be attached to any purchase order.

Type Specifications

Type Size	Overall Height Requirement (2 line of imprint)	Characters/Spaces Per Line	Information	Type Size
3/32"	11/32"	14	Letters:	A through Z (uppercase only)
1/8"	3/8"	10	Numbers:	0 through 9
			Symbols:	# - / ' " .

NOTE:

Non-standard width part required for M and A series braid bands requiring two lines of flexible imprint. Consult factory for details; parts not welded to metal hose (used as tag) may not require non-standard width.


Imprinting Program Information

Additional information may be included on a second imprint run on the side opposite of the first imprint. Double run imprints requires additional set up and run charges, consult price sheet or factory for details.

XYZ HOSE	← FIXED
JOB#986	← FLEXIBLE



BHC

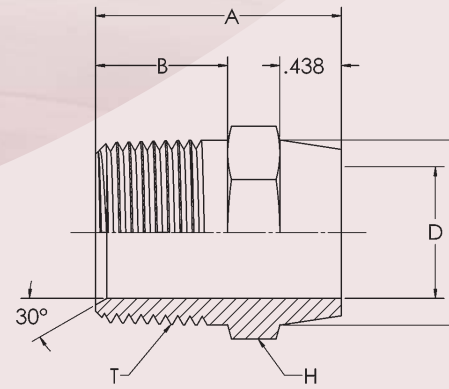


Weld Fittings




Call toll free:

800.333.2636

BHFC

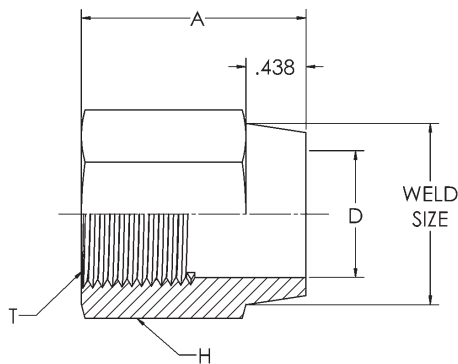

BHJS

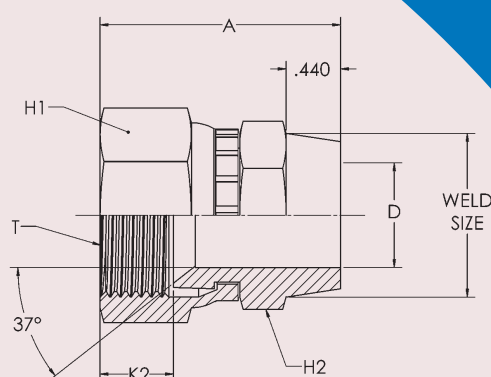

Weld Fittings

WF

Weld End Fittings

Buttweld Hose Connector • Buttweld Hose End/Male Pipe End

PART #	Pipe Size T-Thread	Weld Size	A	B	D	H	Dynamic Pressure Rtg
BHC 1/4	1/4 x 18	1/4	1.19	.50	.25	9/16	4000
BHC 3/8	3/8 x 18	3/8	1.25	.57	.38	11/16	3500
BHC 1/2	1/2 x 14	1/2	1.44	.69	.50	7/8	3000
BHC 3/4	3/4 x 14	3/4	1.50	.76	.75	1-1/16	2500
BHC 1	1 x 11-1/2	1	1.69	.88	1.00	1-5/16	2000
BHC 1 1/4	1-1/4 x 11-1/2	1-1/4	1.94	.98	1.25	1-3/4	1250
BHC 1 1/2	1-1/2 x 11-1/2	1-1/2	2.13	1.01	1.50	2	1000
BHC 2	2 x 11-1/2	2	2.19	1.04	2.00	2-1/2	1000

BHC

Carbon Steel
304 SS
316 SS

Buttweld Hose Female Connector • Buttweld Hose End/Male Pipe End

PART #	Pipe Size T-Thread	Weld Size	A	D	H	Dynamic Pressure Rtg
BHFC 1/4	1/4 - 18	1/4	1.25	.25	3/4	4000
BHFC 3/8	3/8 - 18	3/8	1.57	.38	7/8	3500
BHFC 1/2	1/2 - 14	1/2	1.63	.50	1-1/8	3000
BHFC 3/4	3/4 - 14	3/4	1.70	.75	1-3/8	2500

BHFC

316 SS

Buttweld Hose JIC Swivel • Buttweld Hose End/Female JIC Swivel End

PART #	Tube Size	Tube End UN/ UNF-2A T-Thread	Weld Size	A	D	D1	K2	H1	H2	Dynamic Pressure Rtg
BHJS 1/4	1/4	7/16 x 20	1/4	1.32	.25	.17	.35	9/16	9/16	6000
BHJS 3/8	3/8	9/16 x 18	3/8	1.42	.38	.30	.38	11/16	11/16	5400
BHJS 1/2	1/2	3/4 x 16	1/2	1.43	.50	.39	.43	7/8	7/8	4800
BHJS 5/8	5/8	7/8-14	1/2	1.65	.63	.48	.50	1 1/16	7/8	4800
BHJS 3/4	3/4	1-1/16 x 12	3/4	1.66	.75	.61	.57	1-1/4	1-1/16	4200
BHJS 1	1	1-5/16 x 12	1	1.86	1.00	.84	.60	1-1/2	1-5/16	3000
BHJS 1 1/4	1-1/4	1-5/8 x 12	1-1/4	2.13	1.25	1.08	.63	2	1-3/4	3000
BHJS 1 1/2	1-1/2	1-7/8 x 12	1-1/2	2.23	1.50	1.31	.74	2-1/4	2	2400
BHJS 2	2	2-1/2 x 12	2	2.58	2.00	1.78	.94	2-7/8	2-1/2	1800

BHJS

Carbon Steel
316 SS

Thread One End Pipe Fittings

Code	Fraction (Inches)
01	1/16
02	1/8
03	3/16
04	1/4
05	5/16
06	3/8
07	7/16
08	1/2
09	9/16
10	5/8
11	11/16
12	3/4
13	13/16
14	7/8
15	15/16
16	No fraction

Part Number Description

PF - 16 - 3 SS

1 2 3 4

Pipe Fittings		Availability											
Material	PF Length	04	06	08	12	16	20	24	32	40	48	64	
CS40	3 (1 1/2")	•	•	•	•				•				
	4 (2")			•	•	•	•	•	•				
	5 (2 1/2")							•	•	•	•		
	6 (3")	•	•	•	•	•	•	•	•	•	•	•	
CS80	3 (1 1/2")												
	4 (2")			•	•	•	•	•	•				
	5 (2 1/2")							•	•				
	6 (3")			•	•	•	•	•	•				
SS40	3 (1 1/2")	•	•	•	•								
	4 (2")			•	•	•	•	•	•				
	5 (2 1/2")							•	•				

To accompany or band products AMFM Incorporated offers quality weld end components to complete your fabrication requirements.



Weld Fittings

WF

- 1 **Product Code**
PF = Pipe Fitting
- 2 **Fitting Size**
04 = 1/4" 08 = 1/2" 16 = 1" 24 = 1 1/2" 48 = 3"
06 = 3/8" 12 = 3/4" 20 = 1 1/4" 32 = 2" 64 = 4"
- 3 **Fitting Length**
3 = 1 1/2" 4 = 2" 5 = 2 1/2" 6 = 3"
(Does NOT apply to Hex Male Fittings)
- 4 **Material Code**
CS40 = Carbon Steel / Schedule 40 SS = 304 Stainless Steel
CS80 = Carbon Steel / Schedule 80 ST = 316 Stainless Steel

Part Specifications

PF Carbon Steel Schedule 40

Size	Overall Length	O.D.	Wall	Threads Per Inch	Thread Length
1/4	1.500	0.540	0.088	18	0.5946
1/4	2.000	0.540	0.088	18	0.5946
1/4	3.000	0.540	0.088	18	0.5946
3/8	1.500	0.675	0.091	18	0.6006
3/8	2.000	0.675	0.091	18	0.6006
3/8	3.000	0.675	0.091	18	0.6006
1/2	1.500	0.840	0.109	14	0.7815
1/2	2.000	0.840	0.109	14	0.7815
1/2	3.000	0.840	0.190	14	0.7815
3/4	1.500	1.050	0.113	14	0.7935
3/4	2.000	1.050	0.113	14	0.7935
3/4	3.000	1.050	0.113	14	0.7935
1	2.000	1.315	0.133	11 1/2	0.9845
1	3.000	1.315	0.133	11 1/2	0.9845
1 1/4	2.000	1.660	0.140	11 1/2	1.0085
1 1/4	2.500	1.660	0.140	11 1/2	1.0085
1 1/4	3.000	1.660	0.140	11 1/2	1.0085
1 1/2	2.000	1.900	0.145	11 1/2	1.0085
1 1/2	2.500	1.900	0.145	11 1/2	1.0085
1 1/2	3.000	1.900	0.145	11 1/2	1.0252
2	2.000	2.375	0.154	11 1/2	1.0582
2	2.500	2.375	0.154	11 1/2	1.0582
2	3.000	2.375	0.154	11 1/2	1.0582
2 1/2	2.500	2.875	0.203	8	1.5712
2 1/2	3.000	2.875	0.203	8	1.5712
3	2.500	3.500	0.216	8	1.6337
3	3.000	3.500	0.216	8	1.6337
4	4.000	4.500	0.237	8	1.7337

PF Carbon Steel Schedule 80

Size	Overall Length	O.D.	Wall	Threads Per Inch	Thread Length
1/2	2.000	0.840	0.147	14	0.7815
1/2	3.000	0.840	0.147	14	0.7815
3/4	2.000	1.050	0.154	14	0.7935
3/4	3.000	1.050	0.154	14	0.7935
1	2.000	1.315	0.179	11 1/2	0.9845
1	3.000	1.315	0.179	11 1/2	0.9845
1 1/4	2.000	1.660	0.191	11 1/2	1.0085
1 1/4	3.000	1.660	0.191	11 1/2	1.0085
1 1/2	2.000	1.900	0.200	11 1/2	1.0085
1 1/2	2.500	1.900	0.200	11 1/2	1.0085
1 1/2	3.000	1.900	0.200	11 1/2	1.0085
2	2.000	2.375	0.218	11 1/2	1.0582
2	2.500	2.375	0.218	11 1/2	1.0582
2	3.000	2.375	0.218	11 1/2	1.0582
2 1/2	2.500	2.875	0.276	8	1.5712
2 1/2	3.000	2.875	0.276	8	1.5712
3	2.500	3.500	0.300	8	1.6337
3	3.000	3.500	0.300	8	1.6337
4	3.000	4.500	0.337	8	1.7337

Pipe Fitting 304 Stainless Steel Schedule 40

Size	Overall Length	O.D.	Wall	Threads Per Inch	Thread Length
1/4	1.500	0.540	0.088	18	0.5946
3/8	1.500	0.675	0.091	18	0.6006
1/2	1.500	0.840	0.109	14	0.7815
1/2	2.000	0.840	0.109	14	0.7815
3/4	1.500	1.050	0.113	14	0.7935
3/4	2.000	1.050	0.113	14	0.7935
1	2.000	1.315	0.133	11 1/2	0.9845
1 1/4	2.000	1.660	0.140	11 1/2	1.0085
1 1/2	2.000	1.900	0.145	11 1/2	1.0252
1 1/2	2.500	1.900	0.145	11 1/2	1.0252
2	2.500	2.375	0.154	11 1/2	1.0582

Slot End Fittings

Code	Fraction (Inches)
01	1/16
02	1/8
03	3/16
04	1/4
05	5/16
06	3/8
07	7/16
08	1/2
09	9/16
10	5/8
11	11/16
12	3/4
13	13/16
14	7/8
15	15/16
16	No fraction


Part Number Description

S 4 - 200 - S 08 SS



Slotted End Specifications

Feature	Detail	2" I.D. and Lower	2 1/2" I.D. and Above
Material	Standard weight 304 SS	304 Stainless Steel	
Wall	Wall thickness is based on standard material for standard applications.	Nominal (.049)	
O.D.	This is a reference size resulting from the manufactured ID and wall thickness. Any part sizing by this dimension must result from customer specification using custom specification.	A reference dimension, unless requested using a custom specification.	
I.D. Fit Size	Parts are sized to fit over the mating fitting. Parts are manufactured to the plus tolerance of the specified size. Slotted Ends are designed to reduce ID from external clamp onto mating part.	Manufactured +/- 1/32" tolerance. Closer tolerance in standard and custom available.	Manufactured + 1/16" tolerance. Sizing increments specified in 1/16" to 1/8" increments.
Slots	SW Slot Width	Slots are available in standard configuration	
	SD Slot Depth	Standard 1/8" width (+/- 1/32")	
	SS Slot Spacing	1/2" standard through 2" (+/- 1/64")	7/8" standard above 2" (+/- 1/64")
Length	SS Slot Spacing	2 slots standard equal 180 degree spacing.	4 slots standard equal 90 degree spacing
	Part length specified to accommodate interface of the mating fitting with slotted end, with non-slotted portion to accommodate attachment and required transition length.	Smaller diameters usually require shorter lengths with parts in this range not available in lengths over 6". See standard profiles (+/- 1/8")	Parts in larger sizes can accommodate additional length. See standard profiles (+/- 1/8")

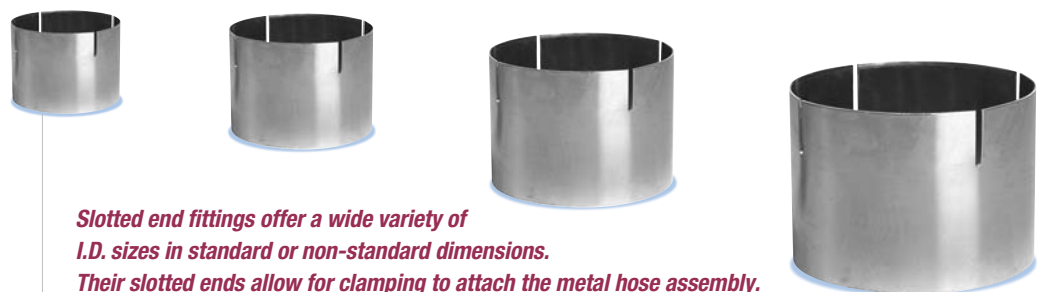

Slotted End

SE

- 1 **Product Code**
S = Slotted End SC = Custom Slotted End
- 2 **Slot Info**
2 = 2 slots/std. 4 = 4 slots/std.
- 3 **Part ID**
First digit = Whole inch Second/third digits = fractional designation
(See code to left)
- 4 **Material Weight** S = Standard
- 5 **Length** Length inches
- 6 **Material type** SS = 304 Stainless Steel

Standard Profile

Part Number	Standard I.D.	Availability			
		3"	4"	6"	Above 6"
S4-201-S (length) SS	2 1/16" (2.063")	•	•		
S4-209-S (length) SS	2 9/16" (2.563")	•			
S4-301-S (length) SS	3 1/16" (3.063")	•			•
S4-309-S (length) SS	3 9/16" (3.563")	•	•	•	•
S4-401-S (length) SS	4 1/16" (4.063")	•	•		•
S4-409-S (length) SS	4 9/16" (4.563")	•			•
S4-501-S (length) SS	5 1/16" (5.063")	•			•
S4-601-S (length) SS	6 1/16" (6.063")	•		•	•

Custom Configuration

Feature	Detail	2" I.D. and Lower	2 1/2" I.D. and Above
Material	Standard weight 304 SS	304 Stainless Steel	
Wall	As in material listing, (currently) standard weight material.	Nominal (.049)	
I.D.	Select ID based on diameter the slotted end is made to fit over. Slotted Ends can be supplied in a single ID only, multiple size units not available.	.030" to .050" over mating diameter	1/16"+ over mating diameter
Slots	- Standard slot width (SW) (1/8") is typical, depending on application. - Slot depth (SD) should consider the overlap of mating part and clamping configuration (also see length). - Slots spacing (SS) based on ID of fitting, with each two slots allowing .080 of reduction (see ID). Odd amounts not recommended.	Below 2" ID, two slots recommended	Use standard slots where possible, consult factory on variations.
Length	Overall length of the unit is determined length requirement of the fitting. Consider slots and attachment to flexible hose application and installation requirements.	Maximum length of 6" or less.	As required to 12".

Consult factory to evaluate your requirements.
AMFM Incorporated can stock slotted ends manufactured to custom specification



OmegaOne


P 800.333.2636

F 888.900.1615

38373 Pelton Road
Willoughby, OH 44094

sales@Omega1.com

www.Omega1.com



Made in the USA



THE ASSOCIATION FOR HOSE AND
ACCESSORIES DISTRIBUTION